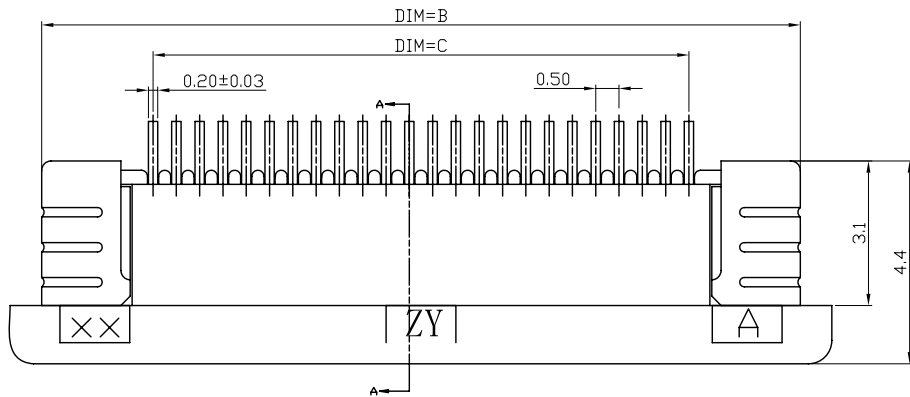
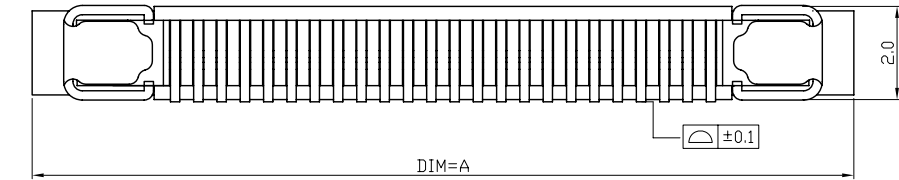
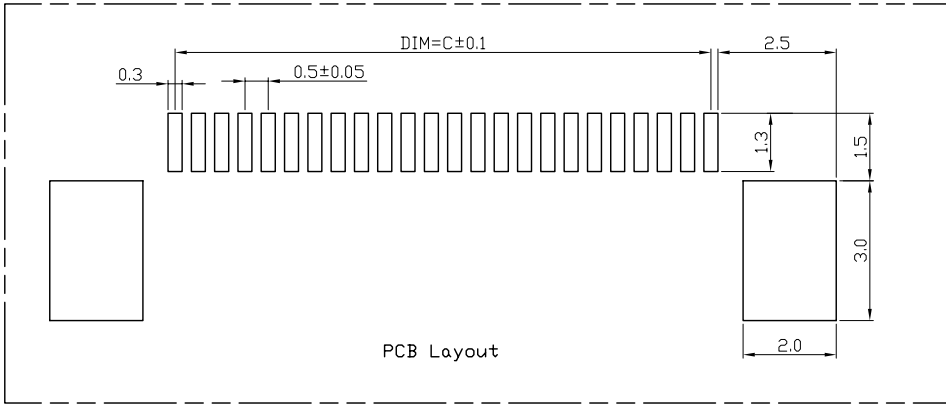


NOTES:
1.PLASTIC BURRS 0.1mm MAX
2.PART NO. SPECIFICATION: AF3AXXA*SOT10

PLASTIC SEMI-MANUFACTURED CODE
NO. OF CONTACT
A: ABOVE CONTACT


PACKAGE CODE
CUSTOMER MARK
SERIAL CODE
MATERIAL CODE

Electrical Characteristics:

Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 500M\Omega$
Relative Humidity: 93%+40°C

Material Description:

Terminal: Phosphor Bronze Tin-plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

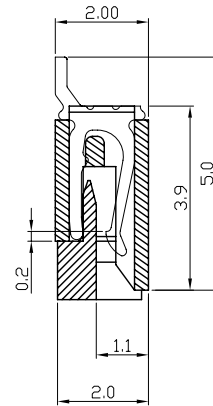

SECTION A-A

上接触



PIN数	DIM=A	DIM=B	DIM=C	DIM=D
34P	22.60	21.50	16.50	17.65
33P	22.10	21.00	16.00	17.15
32P	21.60	20.50	15.50	16.65
31P	21.10	20.00	15.00	16.15
30P	20.60	19.50	14.50	15.65
29P	20.10	19.00	14.00	15.15
28P	19.60	18.50	13.50	14.65
27P	19.10	18.00	13.00	14.15
26P	18.60	17.50	12.50	13.65
25P	18.10	17.00	12.00	13.15
24P	17.60	16.50	11.50	12.65
23P	17.10	16.00	11.00	12.15
22P	16.60	15.50	10.50	11.65
21P	16.10	15.00	10.00	11.15
20P	15.60	14.50	9.50	10.65
19P	15.10	14.00	9.00	10.15
18P	14.60	13.50	8.50	9.65
17P	14.10	13.00	8.00	9.15
16P	13.60	12.50	7.50	8.65
15P	13.10	12.00	7.00	8.15
14P	12.60	11.50	6.50	7.65
13P	12.10	11.00	6.00	7.15
12P	11.60	10.50	5.50	6.65
11P	11.10	10.00	5.00	6.15
10P	10.60	9.50	4.50	5.65
9P	10.10	9.00	4.00	5.15
8P	9.60	8.50	3.50	4.65
7P	9.10	8.00	3.00	4.15
6P	8.60	7.50	2.50	3.65

深圳市威鑫联电子有限公司

						UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.15 X.XX ±0.10 X.XXX ANG. ±0°30'		APPROVED			DATE		PART NO AF3AXXA*S0T10			
								CHECKED			DATE		DRAWING NO			
								DRAWN			DATE		COMPUTER NO			
								黄孟李			2009.07.01					
SER	AREA	REVISIONS		CHK	DATE	UNIT MM		NUMBER			SCALE 1:1	SIZE A4	NAME FPC0.5接拔式上接成品图			REV A
6				7		8					9		0			