
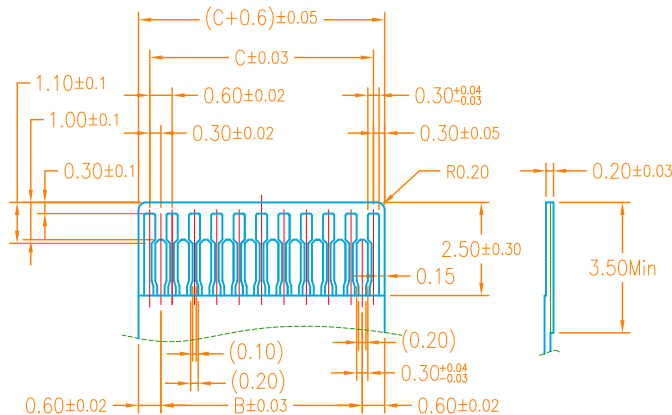


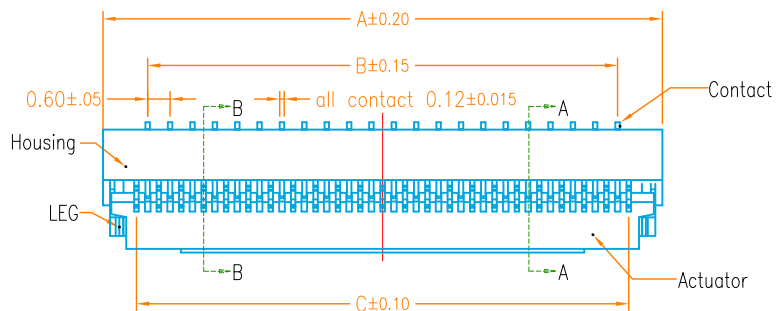

Note:

1.Material

- 1.1: Housing: LCP UL94-V0 Color:Natural.Or Black
1.2: Actuator: LCP UL94-V0 Color:Black Or Natural
1.3: Contact: Phosphor Bronze.
1.4: LEG: Phosphor Bronze.

2.Plating





- 2.1: Contact: See Part Number.
2.2: LEG: Matte Tin Plating Over Nickel.

3.Rating:

- 3.1: Operating Voltage: 30V AC/DC.
3.2: Current Rating: 0.2A AC/DC.
3.3: Operating Temperature:-55°C~+85°C.

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

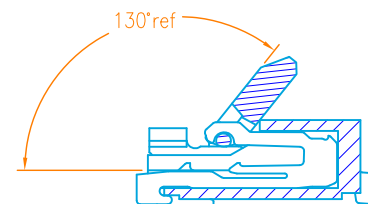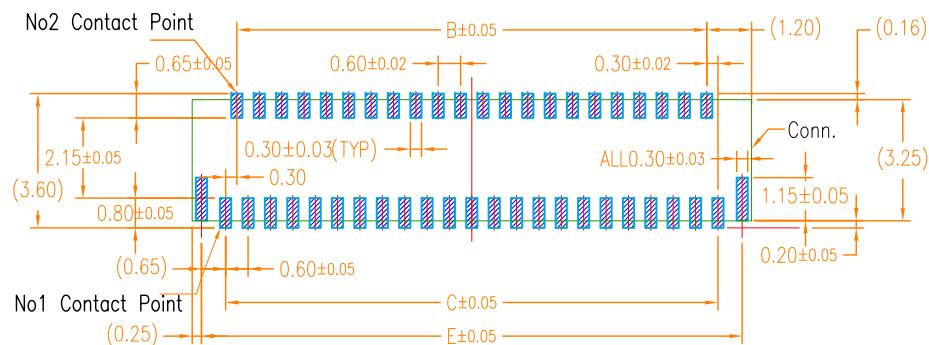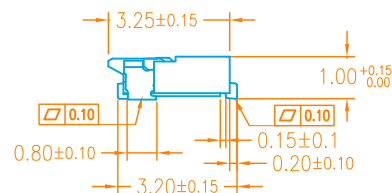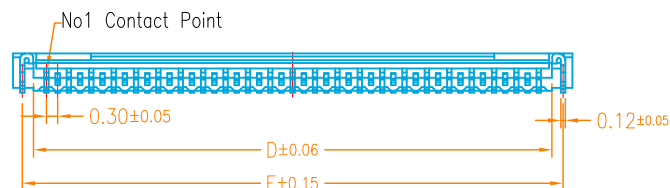

When Actuator Is Opened
Scale 2:1

Number of Contacts	Dimension				
	A	B	C	D	E
13	5.40	3.00	3.60	4.25	4.90
15	6.00	3.60	4.20	4.85	5.50
17	6.60	4.20	4.80	5.45	6.10
19	7.20	4.80	5.40	6.05	6.70
21	7.80	5.40	6.00	6.65	7.30
23	8.40	6.00	6.60	7.25	7.90
25	9.00	6.60	7.20	7.85	8.50
27	9.60	7.20	7.80	8.45	9.10
29	10.20	7.80	8.40	9.05	9.70
31	10.80	8.40	9.00	9.65	10.30
33	11.40	9.00	9.60	10.25	10.90
35	12.00	9.60	10.20	10.85	11.50
37	12.60	10.20	10.80	11.45	12.10
39	13.20	10.80	11.40	12.05	12.70
41	13.80	11.40	12.00	12.65	13.30
45	15.00	12.60	13.20	13.85	14.50
49	16.20	13.80	14.40	15.05	15.70
51	16.80	14.40	15.00	15.65	16.30
57	18.60	16.20	16.80	17.45	18.10
61	19.80	17.40	18.00	18.65	19.30
67	21.60	19.20	19.80	20.45	21.10
71	22.80	20.40	21.00	21.65	22.30
73	23.40	21.00	21.60	22.25	22.90

FPC/FFC Insert Direction
Recommended P.C.B Layout

CUSTOMER



连兴旺电子(深圳)有限公司

LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

一般公差
GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANGLES ±2°

制图 (DR): Kevin
2017.08.16

品名(TITLE): FPC 0.3Pitch 1.0H ZIF
R/A Connector

审核 (CHKD):

料号(PART NO): LF030-GxxW-COR

比例(SCALE): 1:8

单位(UNITS): mm

张数(SHEET): 1 OF 1

图幅(SIZE): A4


修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

版本
(REV) A






EMBOSSED TAPE PACKING

0.3mm Pitch FPC Connector, ZIF R/A SMT Type

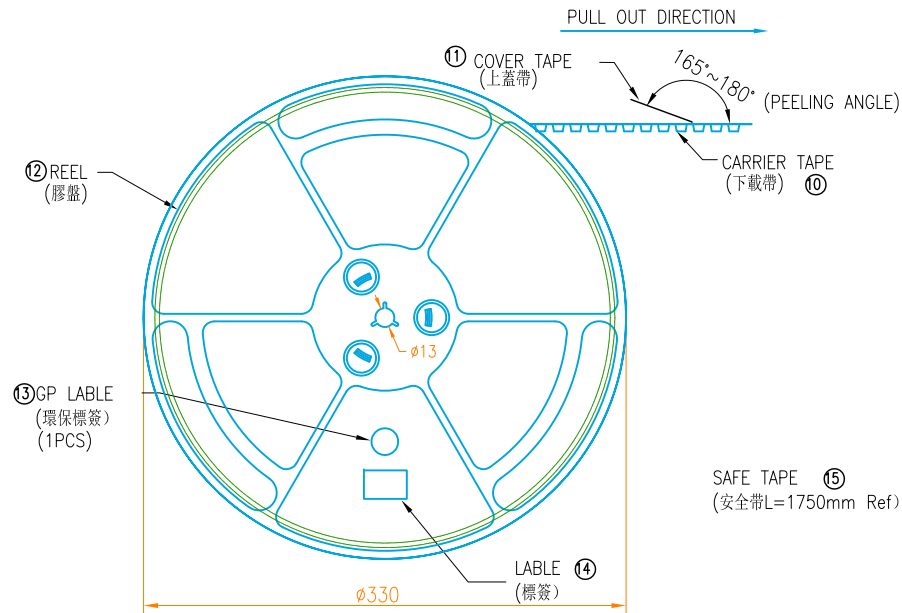


SCALE 1:4

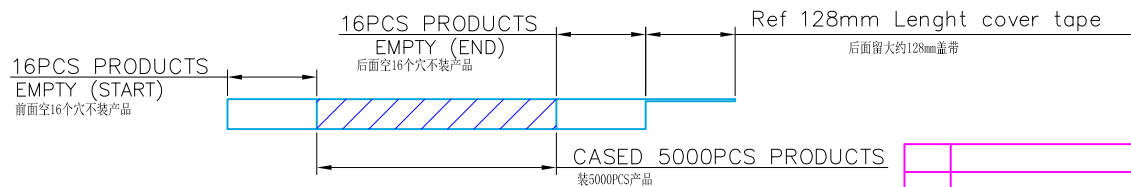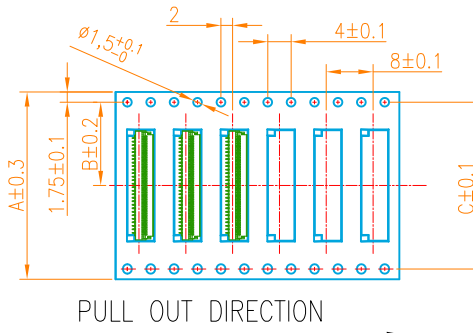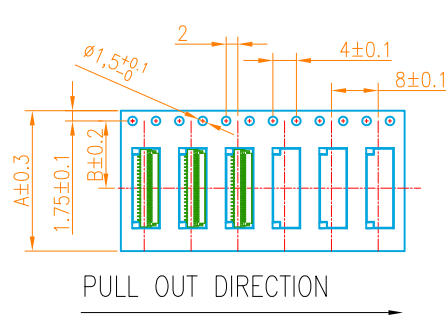

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 5000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides. For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

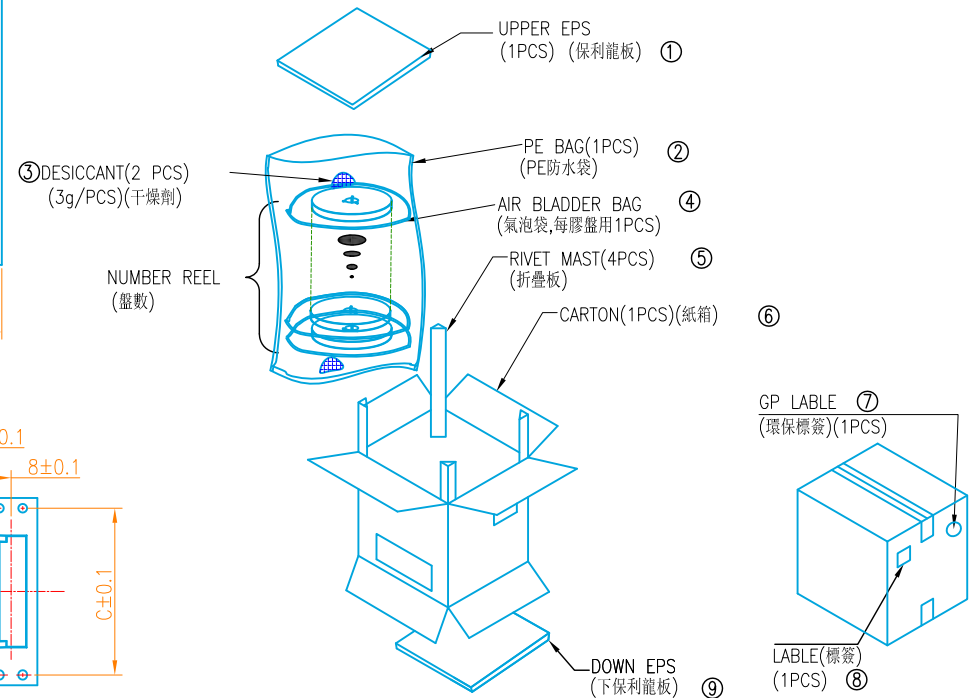

PIN NO.	W	A	B	C	PCS /REEL	REEL/CARTON	SUM(PCS)
13PIN~25PIN	20.5	16	7.50	-	5000	13	65000
27PIN~49PIN	28.5	24	11.5	-	5000	10	50000
51PIN~61PIN	36.5	32	14.2	28.4	5000	8	40000
67~73PIN	48.5	44	20.2	40.4	5000	6	30000

CUSTOMER



连兴旺电子(深圳)有限公司

LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

一般公差
GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANGLES ±2°

制图 (DR):
2017.08.16
审核 (CHKD):

品名(TITLE):
FPC 0.3Pitch 1.0H ZIF
R/A Connector TAPE PACKING
料号(PART NO):
LF030-GxxW-COR

版本 (REV):
A

核准 (APPD):

比例(SCALE):
1:8
单位(UNITS):
mm
张数(SHEET):
1 OF 1
图幅(SIZE):
A4

修订
SER

修改摘要
REVISION DESCRIPTION

签名
SIGNATURE

日期
DATE