



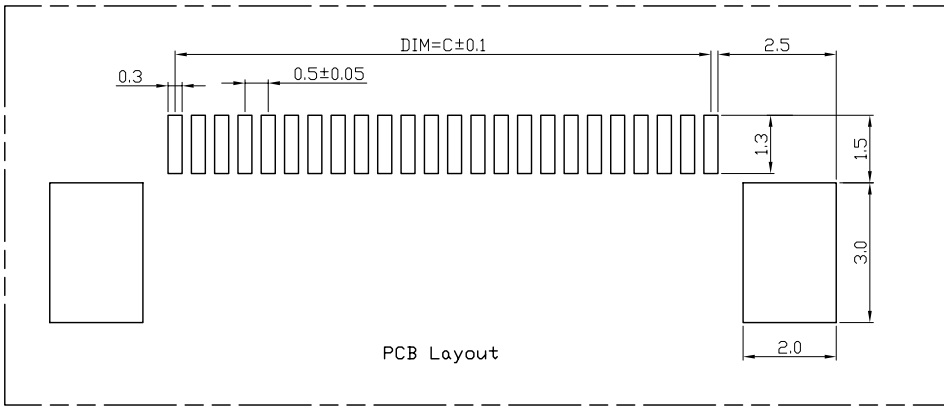


Electrical Characteristics:
Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 500M\Omega$
Relative Humidity: 93%+40°C

Material Description:
Terminal: Phosphor Bronze Tin-plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

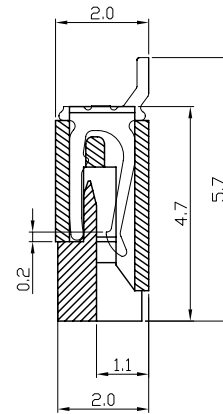

SECTION A-A
下接触

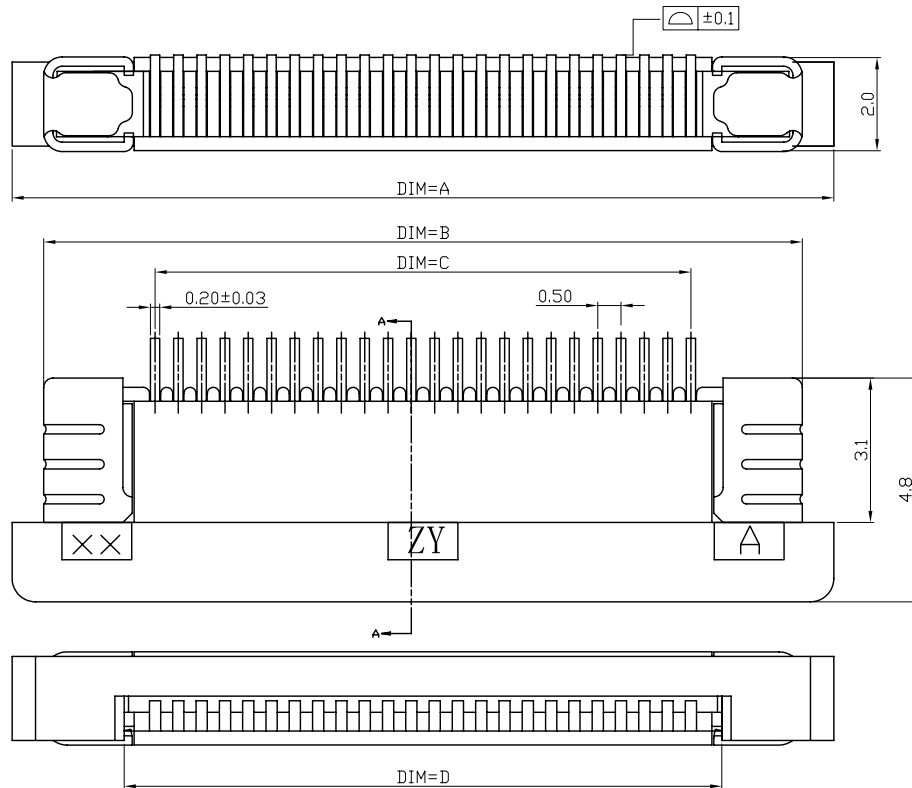

NOTES:
1.PLASTIC BURRS 0.1mm MAX
2.PART NO. SPECIFICATION: AF3AXXB*S0T10

PLASTIC SEMI-MANUFACTURED CODE
NO. OF CONTACT CODE
B:BOTTOM CONTACT

PACKAGE CODE
CUSTOMER MARK SERIAL CODE
MATERIAL CODE

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
60P	35.60	34.50	29.50	30.65
59P	35.10	34.00	29.00	30.15
58P	34.60	33.50	28.50	29.65
57P	34.10	33.00	28.00	29.15
56P	33.60	32.50	27.50	28.65
55P	33.10	32.00	27.00	28.15
54P	32.60	31.50	26.50	27.65
53P	32.10	31.00	26.00	27.15
52P	31.60	30.50	25.50	26.65
51P	31.10	30.00	25.00	26.15
50P	30.60	29.50	24.50	25.65
49P	30.10	29.00	24.00	25.15
48P	29.60	28.50	23.50	24.65
47P	29.10	28.00	23.00	24.15
46P	28.60	27.50	22.50	23.65
45P	28.10	27.00	22.00	23.15
44P	27.60	26.50	21.50	22.65
43P	27.10	26.00	21.00	22.15
42P	26.60	25.50	20.50	21.65
41P	26.10	25.00	20.00	21.15
40P	25.60	24.50	19.50	20.65
39P	25.10	24.00	19.00	20.15
38P	24.60	23.50	18.50	19.65
37P	24.10	23.00	18.00	19.15
36P	23.60	22.50	17.50	18.65
35P	23.10	22.00	17.00	18.15

深圳市威鑫联电子有限公司

					UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		APPROVED		DATE	PART NO	
					X.X ±0.15					AF3AXXB*S0T10	
					X.XX ±0.10		CHECKED		DATE	DRAWING NO	
					X.XXX ±0.30'		DRAWN		DATE	COMPUTER NO	
					ANG.		黄孟奎		2009.07.01		
					UNIT		NUMBER		SCALE	SIZE	NAME FPC0.5拉拔式下接产品图
					MM					A4	
SER	AREA	REVISIONS	CHK	DATE							REV A