

1

2

3




4

5

6


版次	日期	内 容
A1	07.10.05	

Current rating: 0.5A AC\DC (AWG #32)
Voltage rating: 30V AC\DC
Temperature range: -25 to 85
Contact resistance: Initial value/20m Ω max
Insulation resistance: 100M Ω min
Withstanding voltage: 200V AC/ minute
Applicable wire: AWG #32 to #36

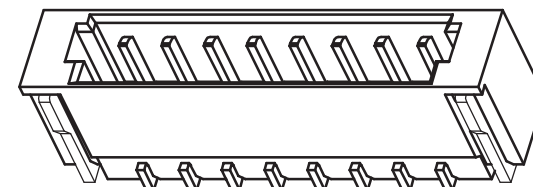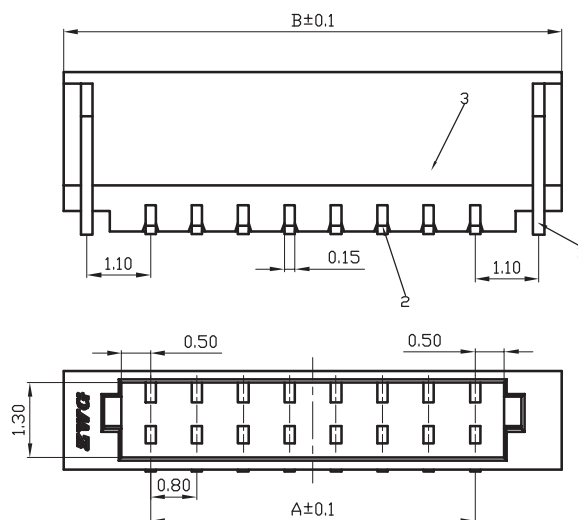

! poles	A	B
2	0.8	3.8
3	1.6	4.6
4	2.4	5.4
5	3.2	6.2
6	4.0	7.0
7	4.8	7.8
8	5.6	8.6
9	6.4	9.4
10	7.2	10.2
11	8.0	11.0
12	8.8	11.8
13	9.6	12.6
14	10.4	13.4
15	11.2	14.2
16	12.0	15.0
17	12.8	15.8
18	13.6	16.6
19	14.4	17.4
20	15.2	18.2

3	CF-0.8T-003		LCP		
2	CF-0.8T-002				
1	CF-0.8T-001				
LXW 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD					
.X	± 0.1	.X*	$\pm 0.1^*$	0.8T-nA/VB	
.XX	± 0.05	.XX*	$\pm 0.05^*$	SMT-08002	
.XXX	± 0.005	.XXX*	$\pm 0.005^*$		
		mm		1/1	

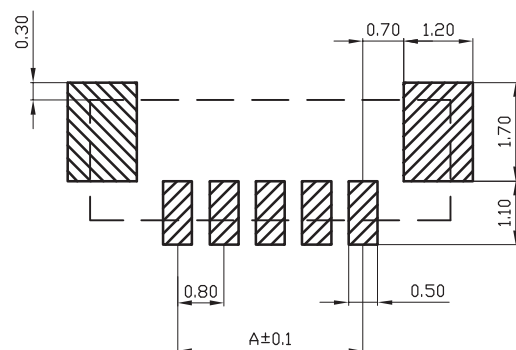

PCB Layout

