

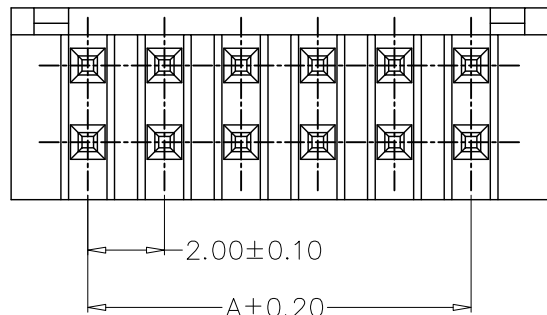
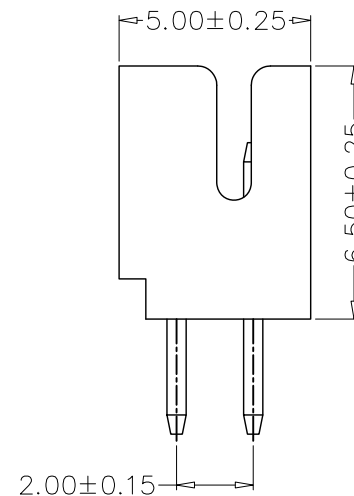
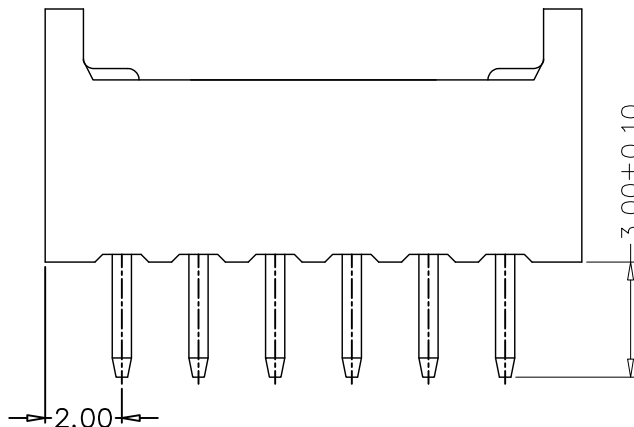
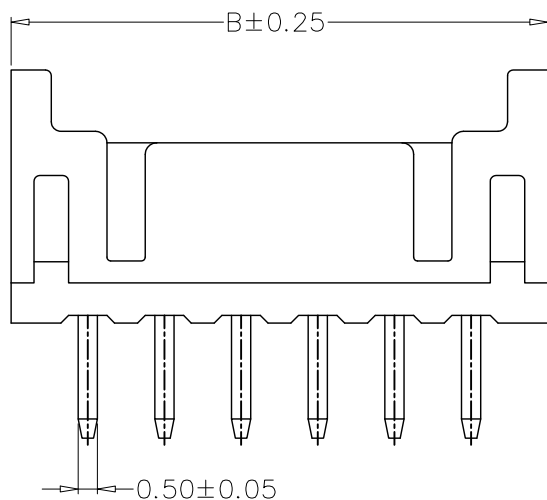
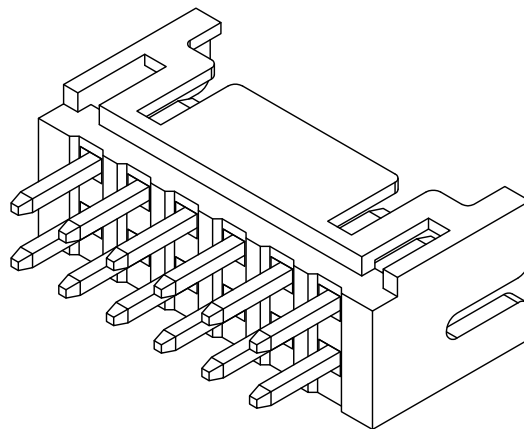


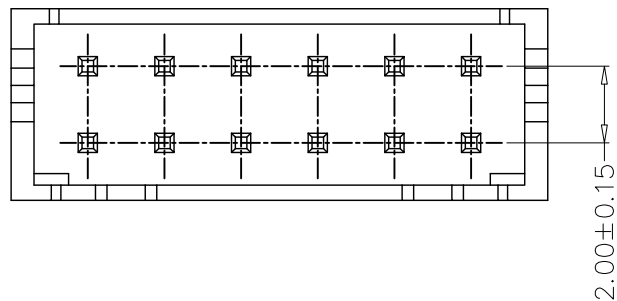

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer PA46, UL94V-0
PIN Brass Tin-plated

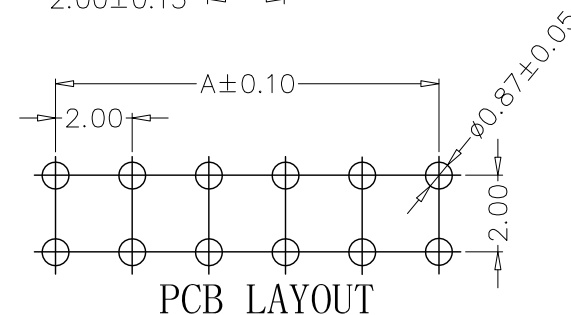

编 号	尺寸 (mm)	
	A	B
A2004-2X02A	2.00	6.00
A2004-2X03A	4.00	8.00
A2004-2X04A	6.00	10.00
A2004-2X05A	8.00	12.00
A2004-2X06A	10.00	14.00
A2004-2X07A	12.00	16.00
A2004-2X08A	14.00	18.00
A2004-2X09A	16.00	20.00
A2004-2X10A	18.00	22.00
A2004-2X11A	20.00	24.00
A2004-2X12A	22.00	26.00
A2004-2X20A	38.00	42.00

GENE RL TOLERANCE		制 图 DRAWING				料 号 PART NO.	A2004-2XnA	版 本 REV.	A
X.±0.25	X'.±2°					品 名 TITLE	PHD直针 WAFER DIP TYPE	页 次 SHEET	1/1
.X±0.20	.X'±1°	审 核 CHECK				客 户 料 号 CUTM. NO.			
.XX±0.15	.XX'±0.5°	核 准 APPROVAL							
.XXX±0.10	.XXX'±0.5°	单 位 UNITS	MM	比 例 SCALE	1:1				