


版本	发行说明	签名	日期
A	新发行	yusheng	2019.09.24

- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED ON CONTACT AREA,
30u" NICKEL PLATING OVER ALL.
SHELL: STAINLESS STEEL, T=0.30±0.03mm
30u" NICKEL PLATING OVER ALL.
- 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
- 3.ELECTRICAL:
CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- 4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
5. 产品符合RoHS标准.

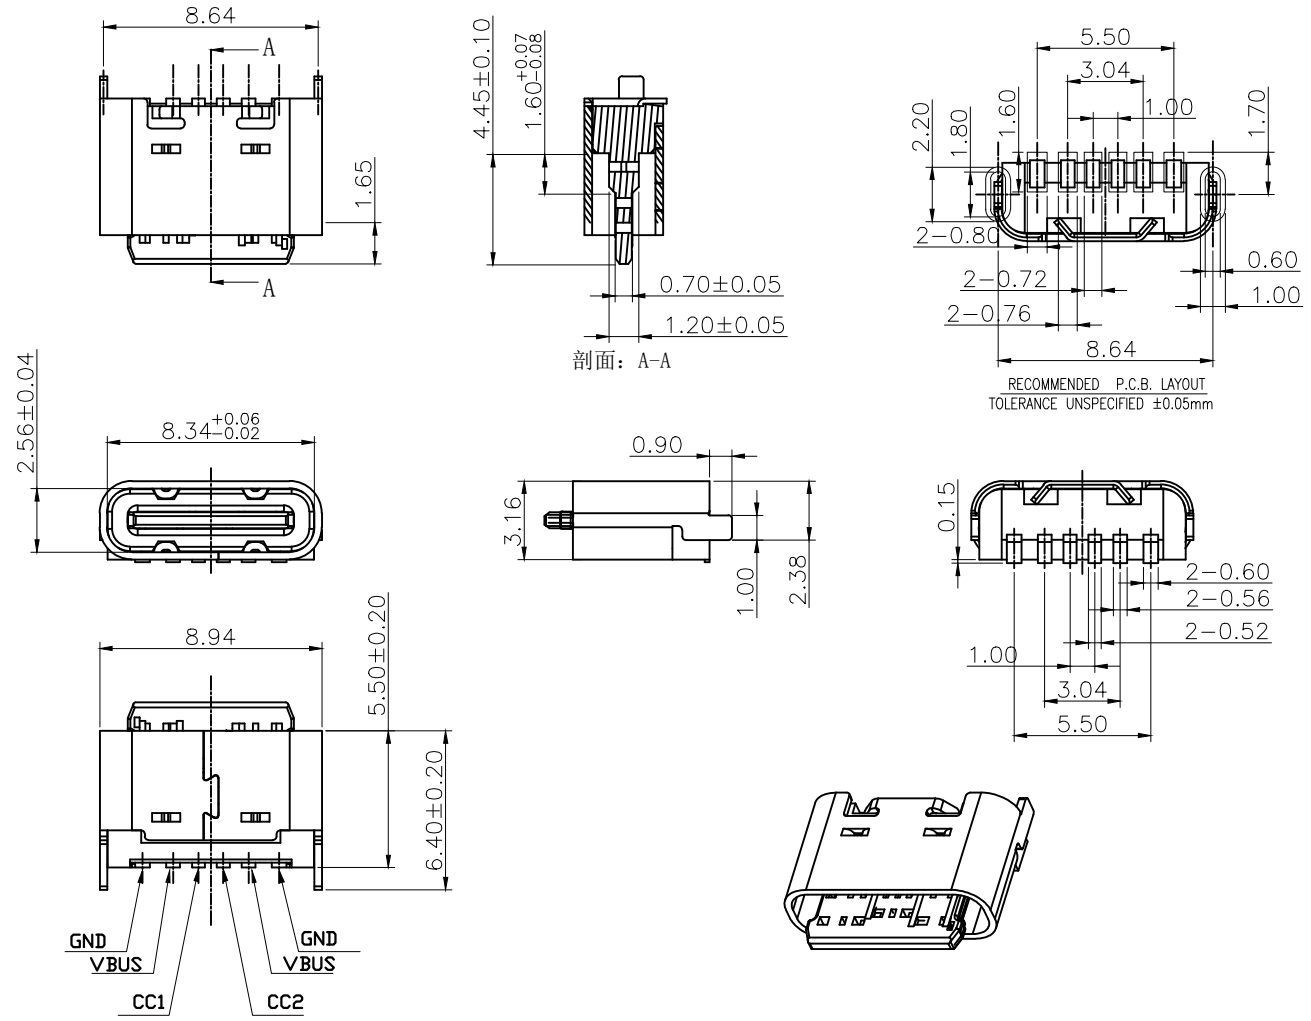

B12	GND	尺寸	允许公差
B9	VBUS	X.	±0.50
B5	CC2	.X	±0.20
A5	CC1	.XX	±0.15
A9	VBUS	.XXX	±0.10
A12	GND	角度	±1.00°
PIN	SIGNAL NAME		

图 纸 类 型		图纸名称:	
产品工程图		6Pin-TYPE C-L5.5-立贴	
设计	yusheng	2019.09.24	产品料号
审核	余廷庆	2019.09.24	视 图
		版号: A	