

REV.	MODIFICATION	ECN No.	NAME	DATE
A0	△新版发行		宋森红	2017-02-24

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA,100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: COPPER ALLOY=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 5000 CYCLES

3.ELECTRICAL:

CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.

VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C




5. 尺寸标注事项:

圆点标注尺寸, 着为首件全检, 重点管控尺寸.

6. 产品符合RoHS标准

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

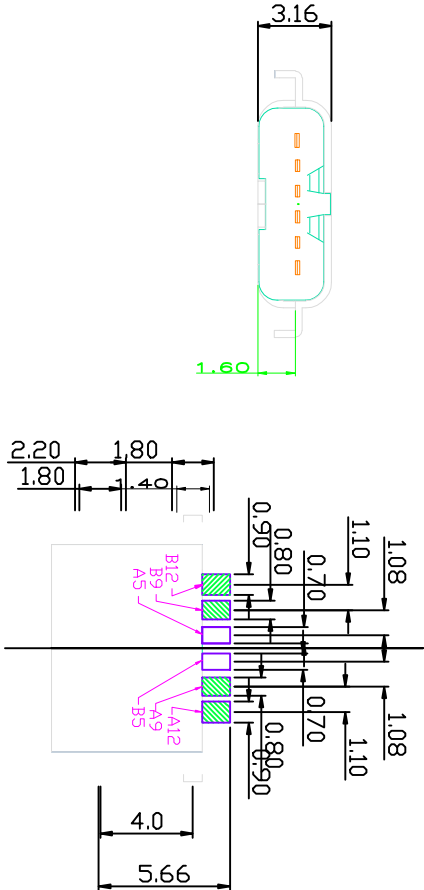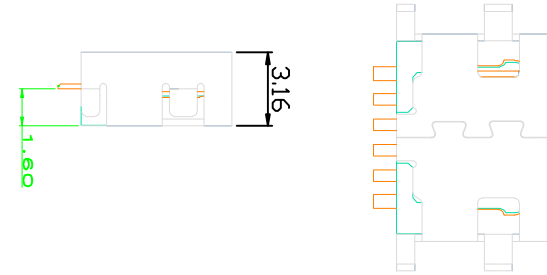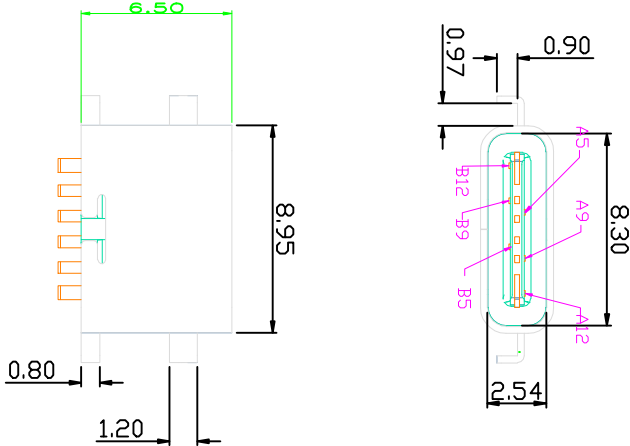

INTENDED USE:		TITLE:	
CONNECTOR		USB TYPE C 2PIN沉板 简易版	
.X: ±0.35	.X': ±1.5'	PART NO.:	SEE TABLE
.XX: ±0.25	.XX': ±1.0'	DWG. NO.:	T16-000X
.XXX:±0.20	.XXX':±0.5'	SCALE:	1:1
MAT'L:	CHKD.:	PAGE:	1/1
SEE NOTES		UNIT:	mm
FINISH:	DR.: Len.Song	REV.:	A0