
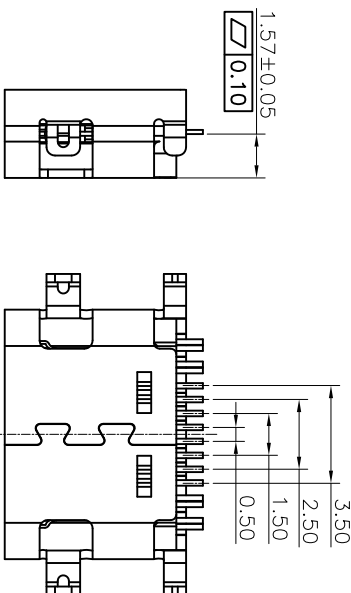


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



- Specification:
- 1.Electrical Characteristics:
- Contact Current Rating: 3 Amperes Max.
- Rated Voltage: 30V Max.
- Dielectric Withstanding Voltage: AC 100V r.m.s.
- Insulation Resistance: 100 MΩ Minimum.
- Contact Resistance: 40 mΩ Maximum.
- 2.Environmental:
- Operating Temperature: -40℃~+85℃.
- 3.Mechanical Characteristics:
- Insertion Force: 5~20Nf.
- Withdrawal Force: 6~20Nf.
- Durability Cycles: 10000 Cycles.
4. Make is FAI test Dimension
- ▼ Make is major test Dimension

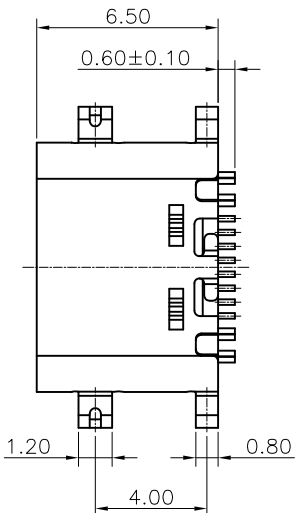

3	CONTACT	COPPER ALLOY
2	INSULATOR	HIGH TEMPERATURE PLASTIC UL 94 V-0
1	SHELL	Stainless Steel
NO.	NAME	DESCRIPTION

10 1 2 - 16 F * * 03 - *

Q=亚镍	H=全金 3u"	O=Black	R=透明热封带
G=全金	G=全金 1u"		
N=壳电镀			

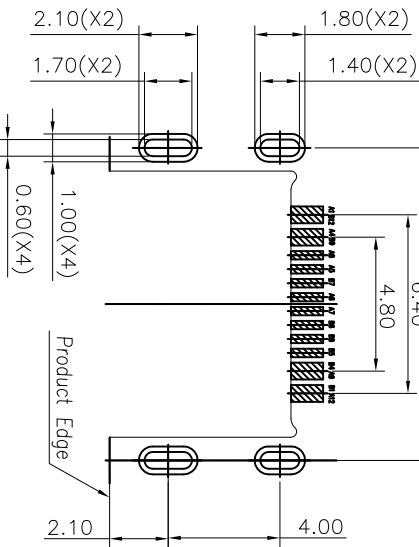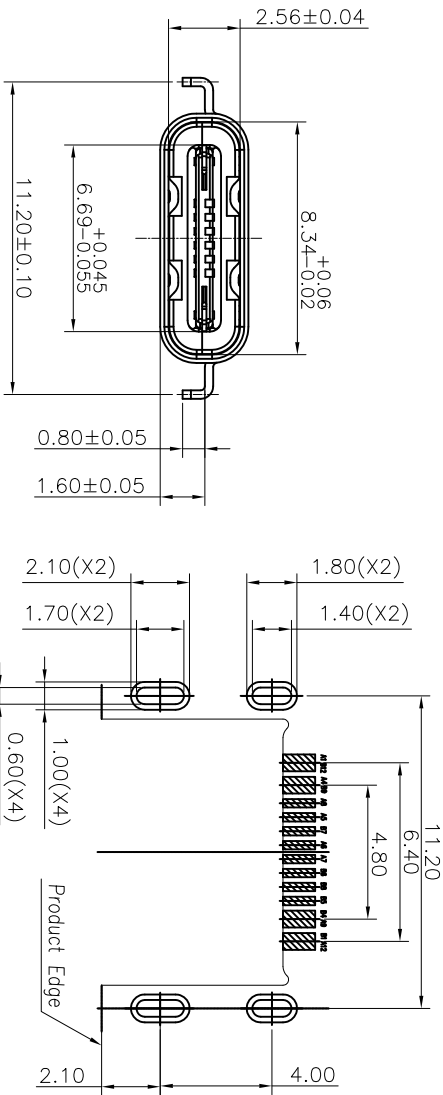

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

06/09-17	yang	NEW-DWG	AO
DATE	DR.BY	ECN.NO.	MARK
-TOLERANCES-		VER.	
UNLESS OTHERWISE SPECIFIED			
公差参考表			

TITLE: USB TYPE C 16Pin 母头
单排 SMT 外壳矩形沉板1.6

X.	±0.15	X.XXX	±0.03	APPD:	PRODUCT NO:		
X.X	±0.10	X.X"	±1.00"	CHECK:	DATE	SCALE	UNIT TYPE
X.XX	±0.05	X.XX"	±0.50"	DRAW:	2017.06.09	1:1	mm CD
							PAGE 1/1