


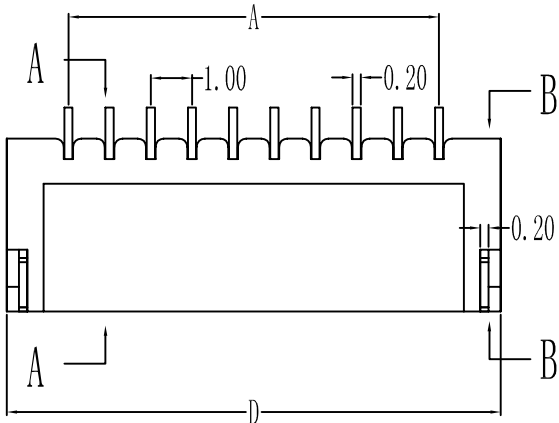



PITCH 1.0mm BAR TO BAR CONNECTOR


REV.	ECN.NO.	MODIFY.CONTENT
A		

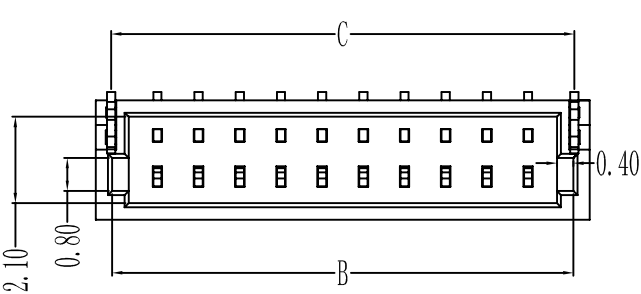

A--A



B--B

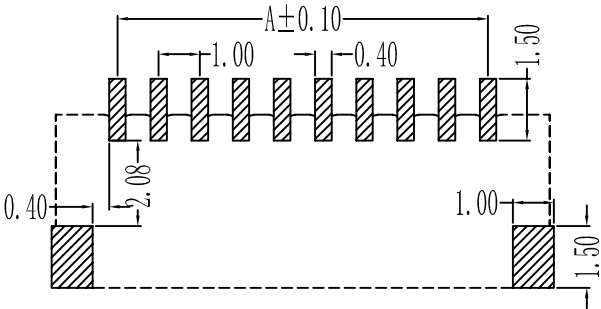

PCB Layout

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V

接触电阻: $\leq 30\text{m}\Omega$

绝缘电阻: 500M Ω


工作温度: -20℃~+85℃

塑件 (材质): LCP, UL94V-0

插簧 (材质): 磷青铜, 镀锡

焊片 (材质): 磷青铜, 镀锡

孔位	A	B	C	D
2	1	3.2	3.25	4
3	2	4.2	4.25	5
4	3	5.2	5.25	6
5	4	6.2	6.25	7
6	5	7.2	7.25	8
7	6	8.2	8.25	9
8	7	9.2	9.25	10
9	8	10.2	10.25	11
10	9	11.2	11.25	12
11	10	12.2	12.25	13
12	11	13.2	13.25	14
13	12	14.2	14.25	15
14	13	15.2	15.25	16
15	14	16.2	16.25	17
16	15	17.2	17.25	18
17	16	18.2	18.25	19
18	17	19.2	19.25	20
19	18	20.2	20.25	21
20	19	21.2	21.25	22
21	20	22.2	22.25	23
22	21	23.2	23.25	24
23	22	24.2	24.25	25
24	23	25.2	25.25	26
25	24	26.2	26.25	27
26	25	27.2	27.25	28
27	26	28.2	28.25	29
28	27	29.2	29.25	30
29	28	30.2	30.25	31
30	29	31.2	31.25	32

GENERAL TOLERANCE		DWG.NO.	1.0-Q-nPWB	PART.NO.	1.0-Q-nPWB	DRAWN	lixiaoli 12/25'07	UNIT	mm	SCALE	NO SCALE
x. ± 0.30	x. $\pm 5^\circ$	REV.	A	TITLE	1.0mm条形连接器	CHECKED		 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD			
.x ± 0.25	.x $\pm 2^\circ$	SIZE		SHEET	1 / 1	APPROVED					
.xx ± 0.20	.xx $\pm 1^\circ$	A4									