
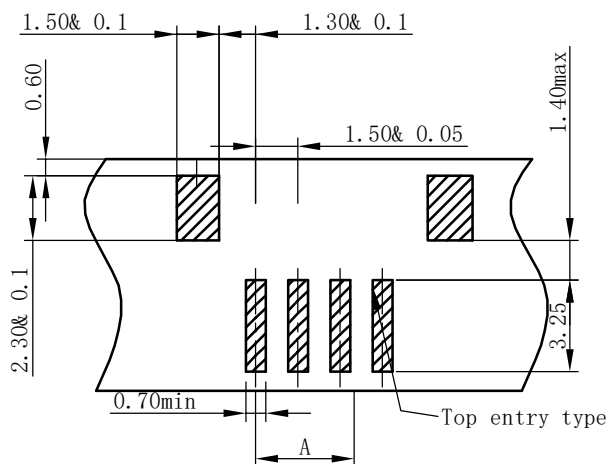







1			2			3			4			5			6		
+	-	.													版次	日 期	内 容
1	2 3 4	5 6 (7 8)													A1	08-05-01	
2	0 1	LCP (UL94-0)															
3	9 :	< 6 (7 8)															

- 1= Current rating:1A AC\DC (AWG #26)
- 2= Voltage rating: 50V AC\DC
- 3= Temperature range: -25> to 85>
- 4= Contact resistance:Initial value/20mΩmax
- Electrical properties
- 5= Insulation resistance:100MΩmin
- 6= Withstanding voltage:500V AC/ minute
- 7= Applicable wire:AWG #30 to #26

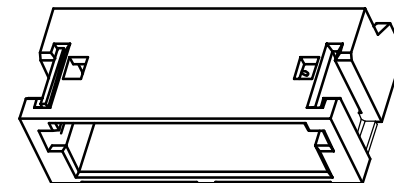

	A	B
2	1. 50	6. 00
3	3. 00	7. 50
4	4. 50	9. 00
5	6. 00	10. 50
6	7. 50	12. 00
7	9. 00	13. 50
8	10. 50	15. 00
9	12. 00	16. 50
10	13. 50	18. 00
11	15. 00	19. 50
12	16. 50	21. 0
13	18. 00	22. 5
14	19. 50	24. 0
15	21. 00	25. 5

深圳市威鑫联电子有限公司

		:			
		ZH nAWB			
. XX 0.05	. XX' 0.05'	+ :			
. XXX 0.005	. XXX' 0.005'				
	: mm	:	--	. / : 1/1	0 1 : A