
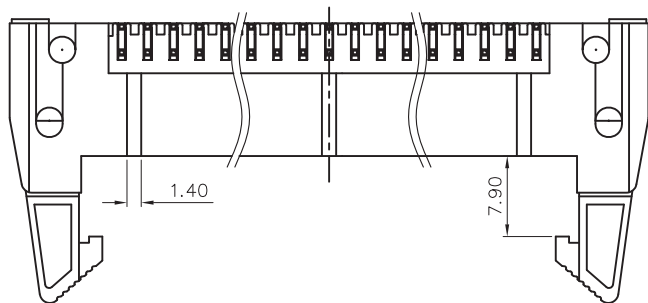
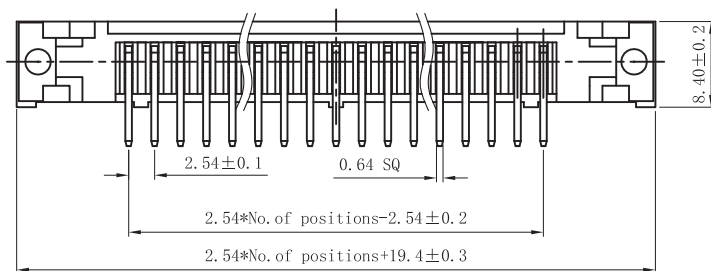


RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Contacts Per ROW	
6pin	28pin
8pin	30pin
10pin	34pin
12pin	36pin
14pin	40pin
16pin	44pin
18pin	50pin
20pin	60pin
24pin	64pin
26pin	

SPECIFICATIONS

Current Rating: 3Amps
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20MΩ Max
 Withstanding Voltage: AC 1000V
 Operation Temperature: -40° to +105°
 Contact Material: Brass
 Standard: PBT
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 200° C for 30-60 seconds
 (220° C for 5 seconds)

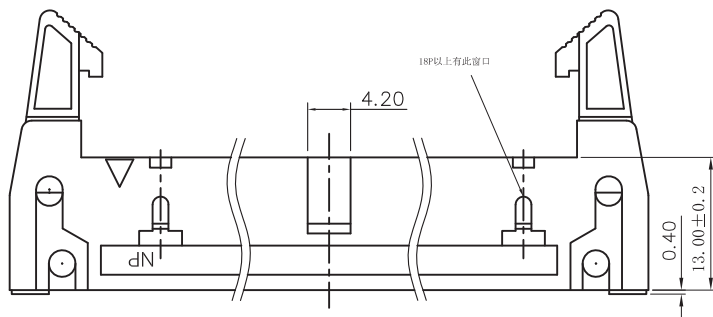

连兴旺电子(深圳)有限公司

LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

UNLESS OTHERWISE SPECIFIED TOLERANCE


X : ±0.30 X° : ±5°
 X.X : ±0.25 X.X° : ±1°
 X.XX : ±0.20 X.XX° : ±0.5°

DRAWN NAME:

2.54DC2-nP H17 90度 PC3.8 L15.5/20.5 PBT 长耳扣

SIZE	A4	SCALE	N:1	PROUCT NO.	
REV	A	UNIT	mm	PROJECT	

CHECKED: 陈超凡 2024/08/27 CHECKED: / / APPROVED: / /



PAGE 1/1