

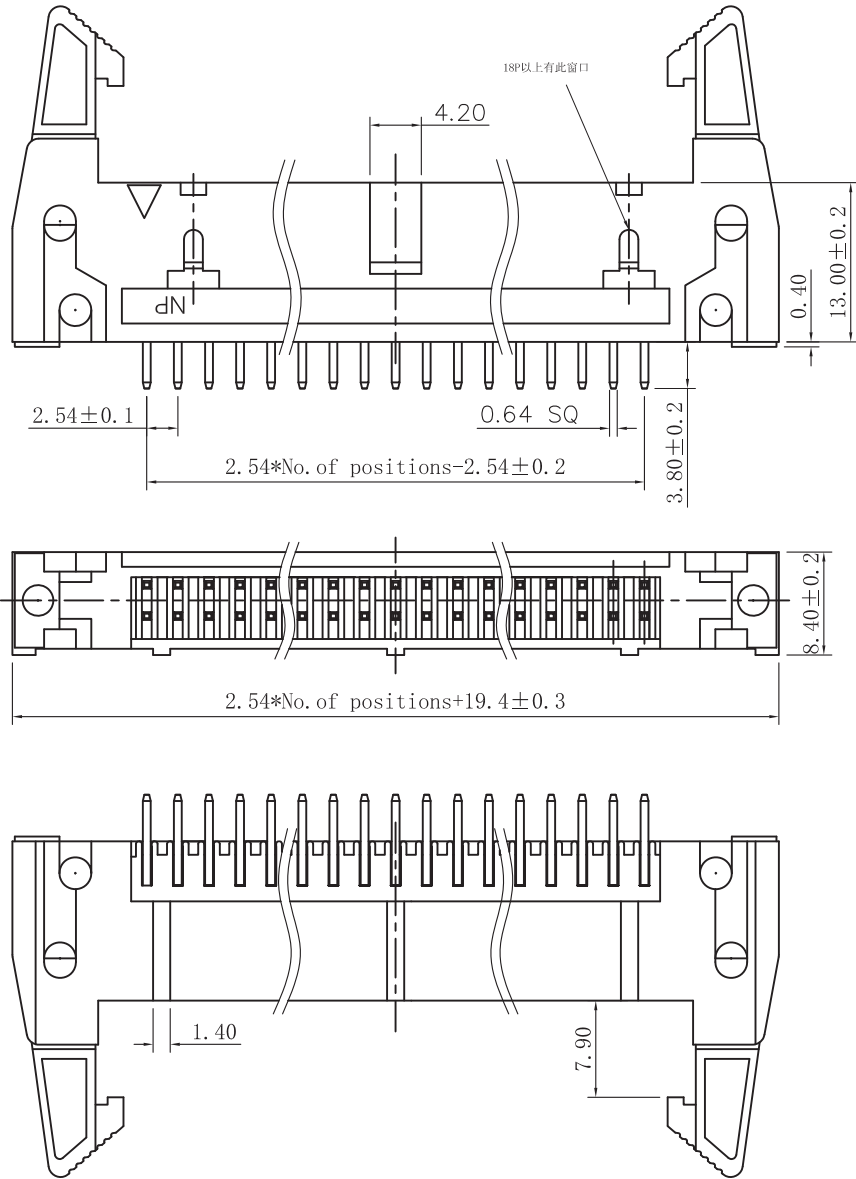




SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20MΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PBT
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp: 200° C for 30-60 seconds
(220° C for 5 seconds)

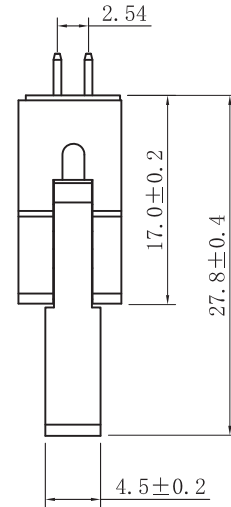

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

Contacts Per ROW	
6pin	28pin
8pin	30pin
10pin	34pin
12pin	36pin
14pin	40pin
16pin	44pin
18pin	50pin
20pin	60pin
24pin	64pin
26pin	



连兴旺电子(深圳)有限公司

LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

UNLESS OTHERWISE SPECIFIED TOLERANCE

X	: ±0.30	X°	: ±5°
X.X	: ±0.25	X.X°	: ±1°
X.XX	: ±0.20	X.XX°	: ±0.5°

DRAWN NAME:

2.54DC2-NPin H17 180度 PC3.8 PBT 长耳扣

SIZE	A4	SCALE	N:1	PROUCT NO.		
REV	A	UNIT	mm	PROJECT	PAGE	1/1

CHECKED: 陈超凡 2024/08/27 CHECKED: / / APPROVED: / /