

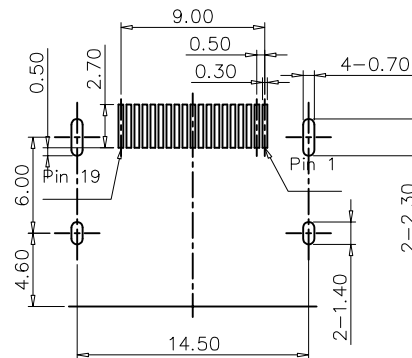
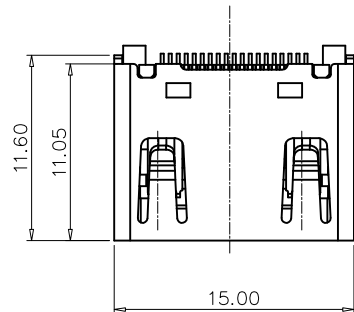



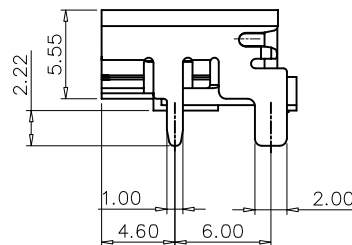

Recommended P.C.B Layout (top View)
Tolerance $\pm 0.05\text{mm}$

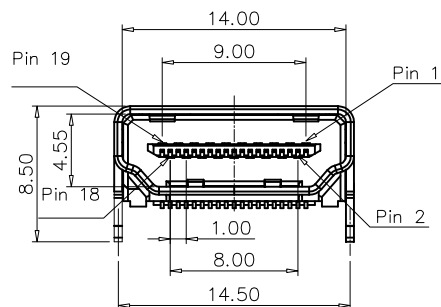

1.Electrical Specification:

- 1.1 Current Rating:1.5A AC/DC
- 1.2 Voltage Rating: 40V AC/DC
- 1.3 Contact Resistance: 30m ohm max
- 1.4 Insulation Resistance:1000M ohm min
- 1.5 Dielectric Withstanding Voltage:500V DC

2.Material and Finish:

- 2.1 Housing:Hi-Temp; UL 94V-0.
- 2.2 Latch:Hi-Temp; UL 94V-0.
- 2.3 Contact:Phosphor Bronze
- 2.4 Shell:Spcc Gold-plated G/F
- 2.5 Contact Plating:Gold Plating Over Nickel on Contact

3.Environmental

Operating Temperature: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

HDM	F	B	019	17-	01	5	1	3	R	
HDMI Series										RoHS
Female										Packing
SMT										1. TRAY
PIN Number										3. Tape Reel
Plating										Colour
										1. Black
										Material
										5. LCP

UNLESS TOLERANCE		DRAW BY:	marco	15.11.30	DRAWN BY: marco	15.11.30	CHECK BY: Zyb	15.11.30	APPROVE BY: Zyb	15.11.30	SCALE	SHEET	UNIT	1:1	10F1	mm	PART NO: HDMFB01917-01513R	ITEM : HDMI A 母19PIN SMT 90度四脚	DRW NO:	REV:A0
GENERAL	ANGLE																			
X. ± 0.40	X.' $\pm 3^{\circ}$																			
.X ± 0.30	.X' $\pm 2^{\circ}$																			
.XX ± 0.25	.XX' $\pm 1^{\circ}$																			
.XXX ± 0.10	.XXX' $\pm 0.5^{\circ}$																			

LXW 连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD

A0 NEW DWG 15.11.30 marco Zyb

REV. DESCRIPTION DATE DISIGN APPROVE