




结构图面

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
0	原始图档		ZHU	ZHU	2022/07/16

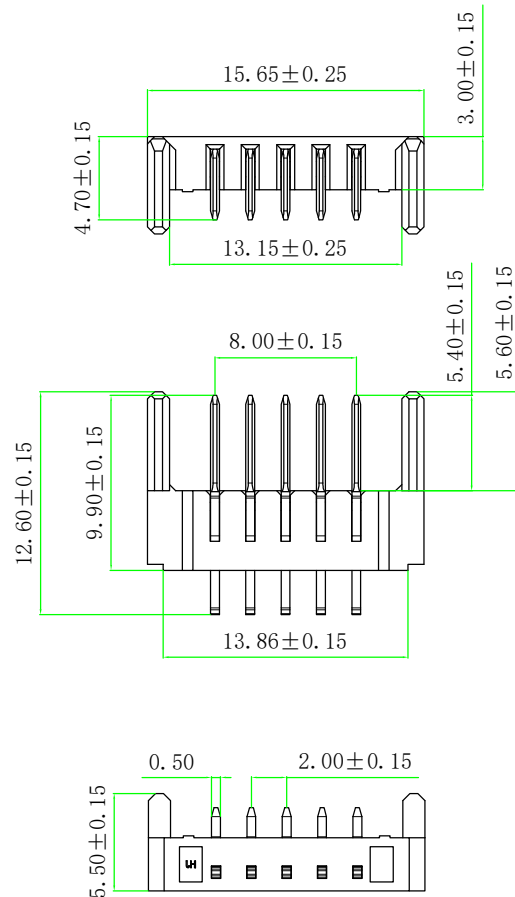

Material

Insulator : Nylon 9T (UL94V—O)

Contact : phosphor BronZe

Contact platted : Gold over Nickel or Tin

Specification

Current Rating : 5A


Instant Current : 7A

Contact resistance : 30mΩ

Insulation resistance : 100mΩ

Dielectric Voltage : 500V

Operating Temperature : -40° ~105°

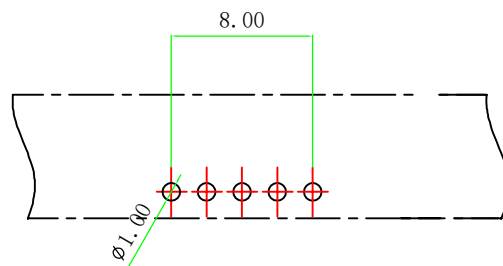

RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES±0.05MM

GENERAL TOLERANCES (UNLESS SPECIFIED)				SCALE: 1:1	NUMBER:	 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD	
	MM		INCH				
.X	±0.25	.X	-----			TITLE:	
.XX	±0.15	.XX	-----				
.XXX	±0.05	.XXX	-----			 THIRD ANGLE PROJECTION	
ANGULAR ±1°							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						PART NO.	SHEET NO. 1/1
						电池座2.0间距无鱼叉180° 直插	
						A4	