

结构图面

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	原始图档		ZHU		2022/07/16

Material

Insulator : Nylon 9T (UL94V—O)

Contact : phosphor Bronze

Contact plated : Gold over Nickel or Tin

Specification

Current Rating : 5A




Instant Current : 7A

Contact resistance : 30mΩ


Insulation resistance : 100mΩ

Dielectric Voltage : 500V

Operating Temperature : -40° ~105°

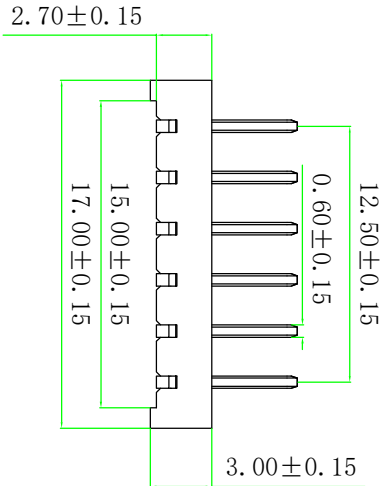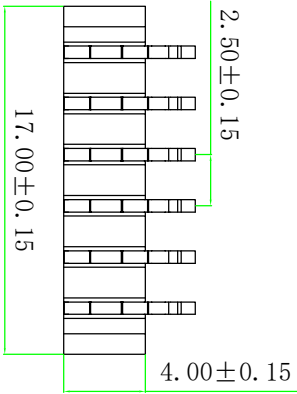

H	4.2	5.8	7.0	7.5	8.5
H1					

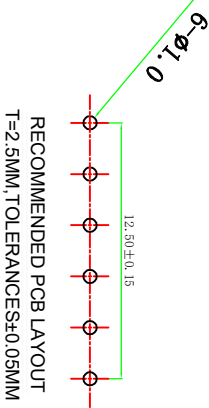

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE:	NUMBER:
MM	INCH	1:1	
.X	±0.25	.X	
.XX	±0.15	.XX	
.XXX	±0.05	.XXX	
ANGULAR ±1°			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
DRAWN BY: 黄丽君		DATE: 22/07/16	
CHECKED BY: 朱孔旭		DATE: 22/07/16	
APPROVED BY: 朱孔旭		DATE: 22/07/16	
THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
PART NO.		DWS NO.	
SHEET NO. 1/1		A4	



连兴旺电子(深圳)有限公司
LYWCONV ELECTRONICS (SHENZHEN) CO., LTD

电池座2.5间距90° AW7