

结构图面

REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	原始图档		ZHU		2022/07/16

Material

Insulator : Nylon 9T (UL94V—O)

Contact : phosphor Bronze

Contact plated : Gold over Nickel or Tin

Specification

Current Rating : 5A





Instant Current : 7A

Contact resistance : 30mΩ


Insulation resistance : 100mΩ

Dielectric Voltage : 500V

Operating Temperature : -40° ~105°

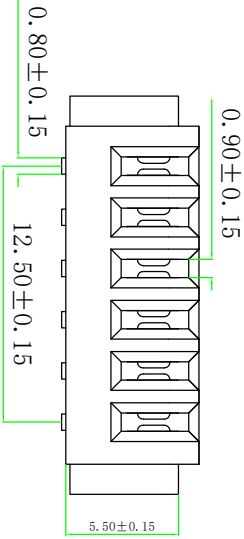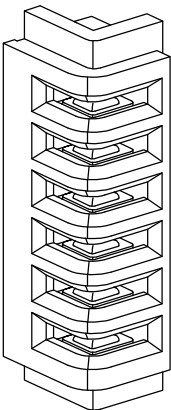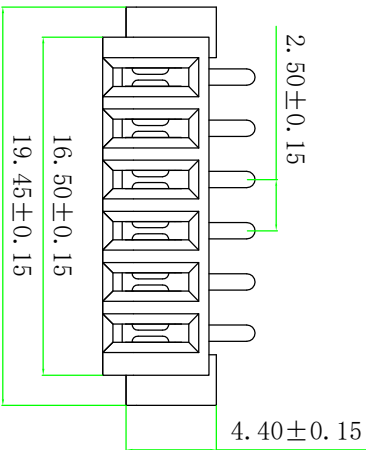

SMT	2.2	H1	H2	H3	H4	H5

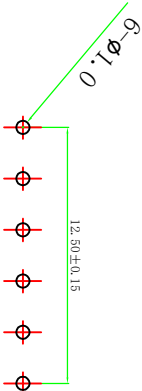

RECOMMENDED PCB LAYOUT
T=2.5MM,TOLERANCES±0.05MM

GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:
MM	INCH		
.X	±0.25 .X		DRAWN BY: 黄丽君
.XX	±0.15 .XX		DATE 22/07/16
.XXX	±0.05 .XXX		CHECKED BY 朱孔旭
ANGULAR ±1°		DATE 22/07/16	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY 朱孔旭	DATE 22/07/16
		THIRD ANGLE PROJECTION	REVISION ON CAD ONLY
		PART NO.	DWG NO.
		SHEET NO. 1/1	



连兴旺电子(深圳)有限公司
LXWCONV ELECTRONICS (SHENZHEN) CO., LTD

电池座2.5间距90° SMT

A4