

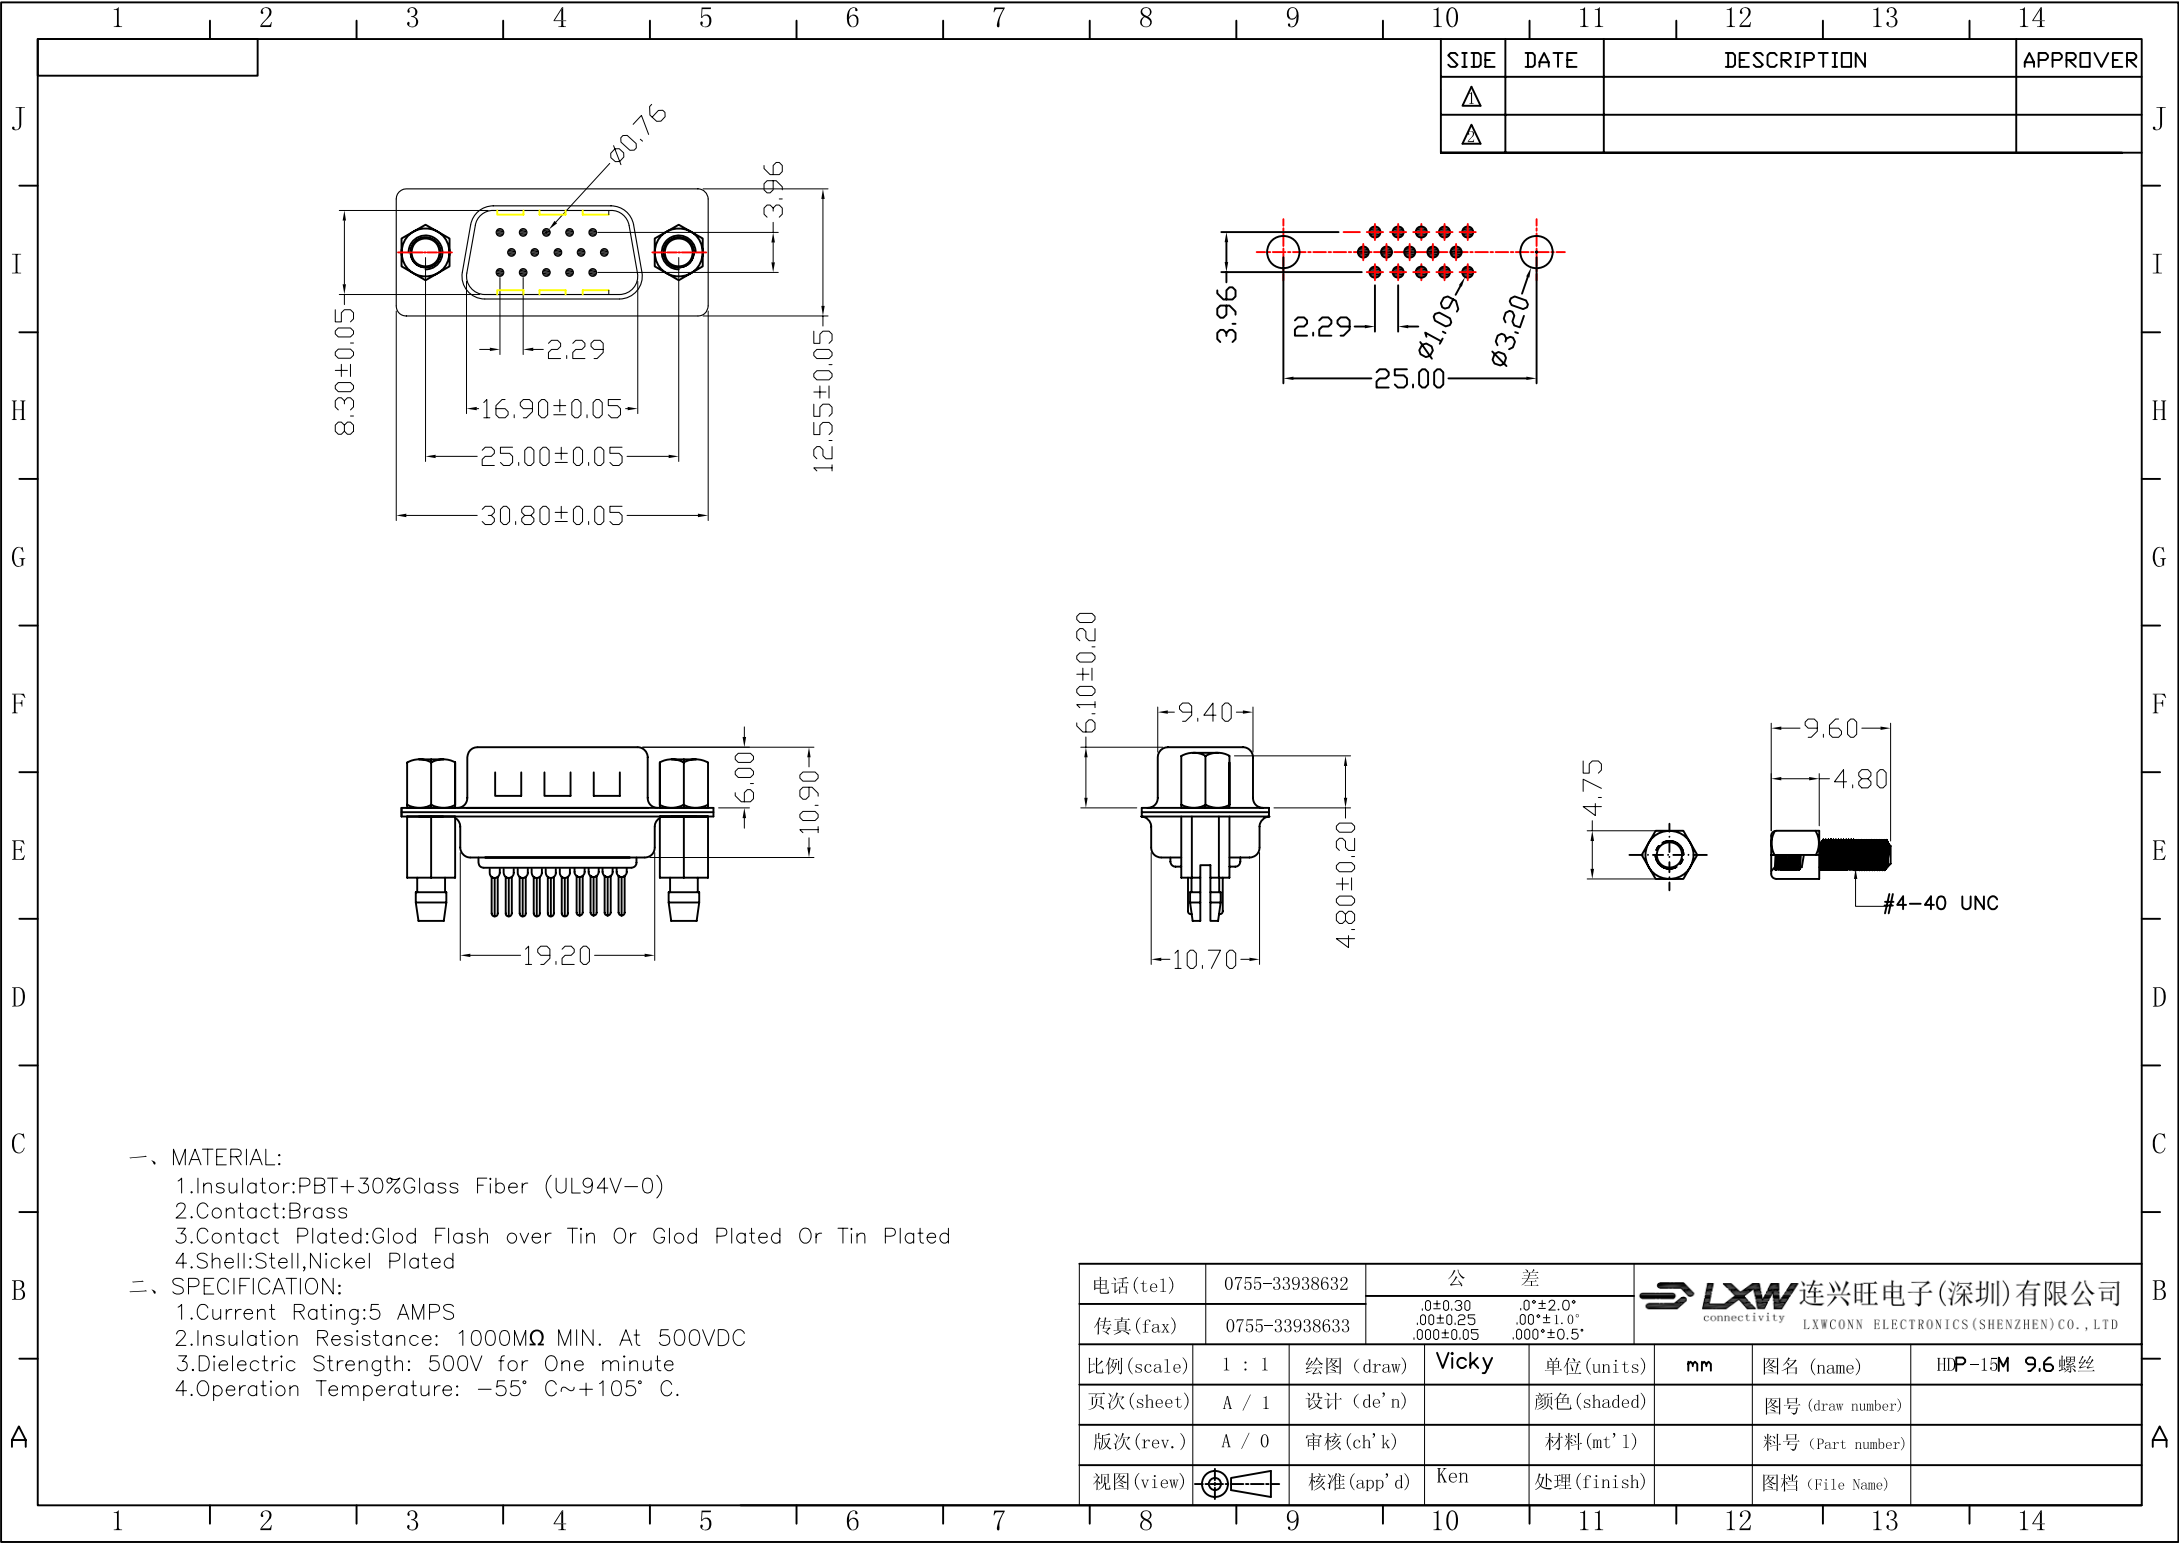
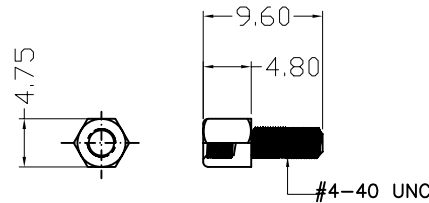
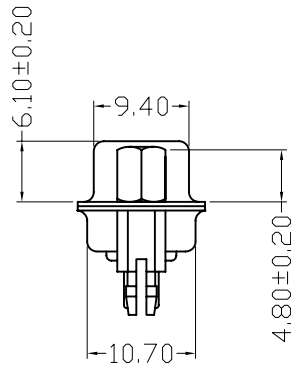
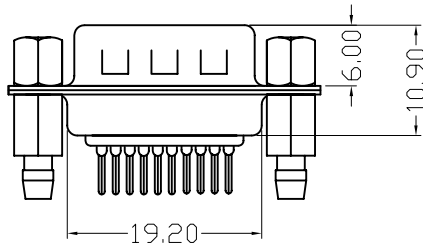


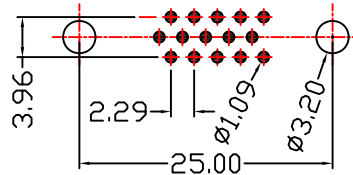

SIDE	DATE	DESCRIPTION	APPROVER
△			
△			

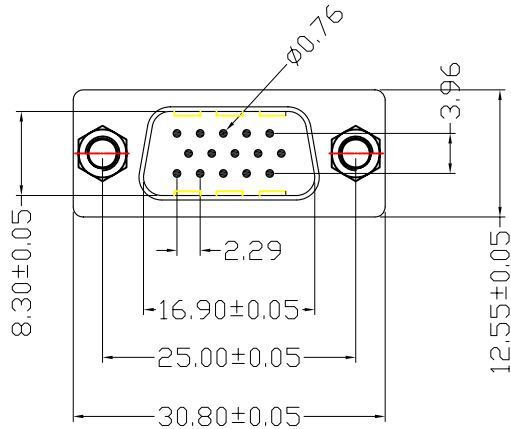

一、MATERIAL:

- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
- 2.Contact:Brass
- 3.Contact Plated:Glod Flash over Tin Or Glod Plated Or Tin Plated
- 4.Shell:Stell,Nickel Plated

二、SPECIFICATION:

- 1.Current Rating:5 AMPS
- 2.Insulation Resistance: 1000MΩ MIN. At 500VDC
- 3.Dielectric Strength: 500V for One minute
- 4.Operation Temperature: -55° C~+105° C.

电话(tel)	0755-33938632	公 差		 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD			
传真(fax)	0755-33938633	.0±0.30 .00±0.25 .000±0.05	.0*±2.0° .00*±1.0° .000*±0.5°				
比例(scale)	1 : 1	绘图 (draw)	Vicky	单位(units)	mm	图名 (name)	HP-15M 9.6 螺丝
页次(sheet)	A / 1	设计 (de'n)		颜色(shaded)		图号 (draw number)	
版次(rev.)	A / 0	审核(ch'k)		材料(mt'l)		料号 (Part number)	
视图(view)		核准(app'd)	Ken	处理(finish)		图档 (File Name)	