

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/27/05'		
B	增加螺丝类型 D	L L 06/06/06'		

NOTES:

1. PRODUCTS PERFORMANCE:

- 1.0 VOLTAGE RATING: 250V AC.
- 1.1 CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
- 1.2 CONTACT RESISTANCE: 20mΩ MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.4 INSULATION RESISTANCE: 1000MΩ MIN.
- 1.5 TEMPERATURE RANGE: -45°C~+105°C.

2. PRODUCT NUMBER CODE:

1038 - X X X X X X X X

SCREW DIM. E

4: 4.80mm

5: 5.80mm

BOARD LOCK DIM. F

4: 4.00mm

7: 3.70mm

SCREW TYPE

A:WITH SCREW TYPE

B:WITH RIVET TYPE

C:RIVET TYPE WITH FIXED SCREWS

D:RIVET TYPE WITH SCREWS

IN BULK PACKAGE

CONTACT PLATING

Si: SELECTIVE GOLD FLASH

8: FULL GOLD FLASH

6: FULL TIN

SHELL PLATING

N: Nickel

T: Tin

COLOR OF HOUSING

Y: Yellow

B: BLACK

U: BLUE

C: BLUE(PC99)

CONNECTOR TYPE

M: MALE

F: FEMALE

No. OF CONTACTS



15: 15pos.

44: 44pos.


26: 26pos.

62: 62pos.

[FEMALE]

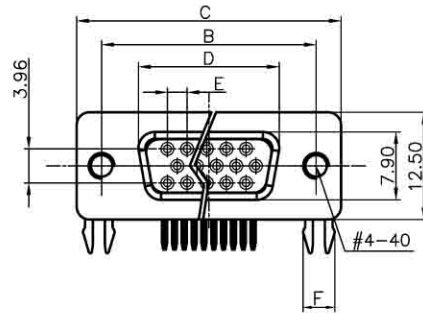


SCREWS




WITH SCREW TYPE



WITH RIVET TYPE






RIVET TYPE WITH FIXED SCREWS



RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)
(VIEW FROM TOP SIDE)

[MALE]

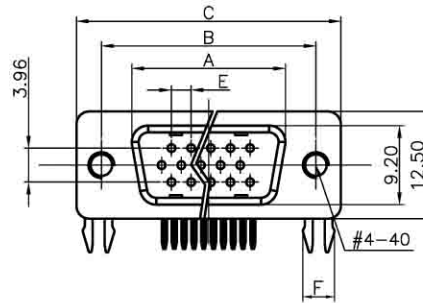

Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.84	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1038-XXXXXXX		

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	DS1038 SERIES

D-SUB H.D RIGHT ANGLE TYPE

woxconn electronics co.,ltd