

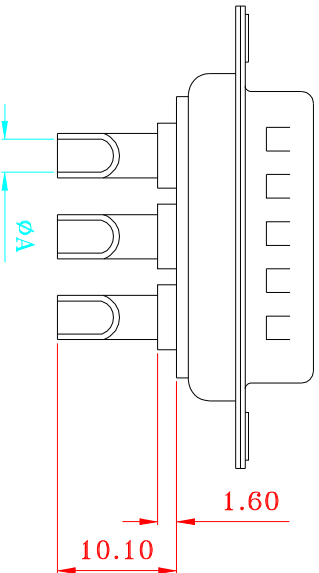


10	11	12	13	14
SIDE	DATE	DESCRIPTION		APPROVER
△				

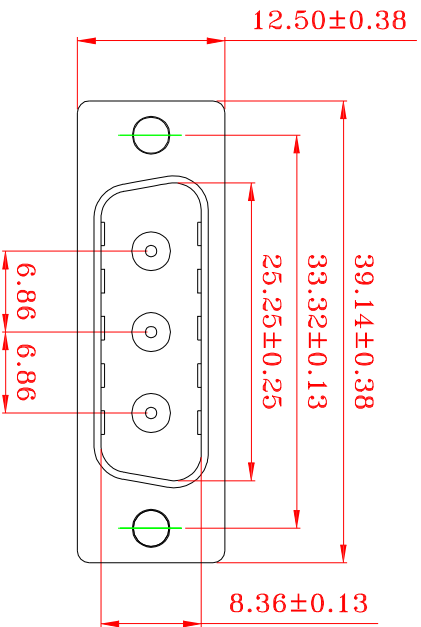

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 DIMPLES ON PLUG ONLY
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 HIGH POWER CONTACT MATERIAL: BRASS, 2u” GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

PART NO.	Current Rating	Dimension	
		Φ A	
1198-033-715-000	40 AMPS	Φ4.6	
1198-033-515-000	30 AMPS	Φ3.2	
1198-033-315-000	20 AMPS	Φ2.8	
1198-033-115-000	10 AMPS	Φ1.7	

(tel)	0755-29591214		
(fax)	0755-27951049	040.95 00±0.20 000±0.05	041.0 00±0.5 000±0.1
(scale)	1 : 1	(date)	(units)
(sheet)	A / 1	(draw)	(shaded)
(rev.)	A / 0	(chk)	(mt' l)
(view)	Φ	(app' d)	(finish)
			(tel)
		18682412009 (Mr. Wu)	

1	2	3	4	5	6	7	8	9	10	11	12	13	14
---	---	---	---	---	---	---	---	---	----	----	----	----	----