REV	ECN NO.	DESCRIPTION	DATE
A		RELEASED	25/10/2006
B	20080521-1	增加鱼叉管控尺寸	20080521

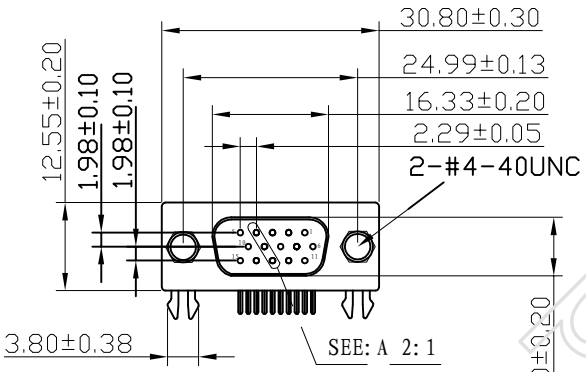



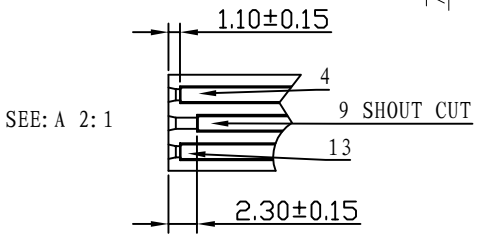

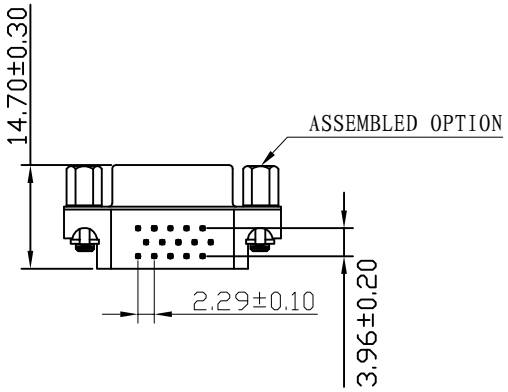



SPECIFICATIONS:

ELECTYICAL:

CONTACT CURRENT RATING: 5 A

DIELECTRIC WITHSTANDING VOLTAGE: AC 500 V.

INSULATION RESISTANCE: 1000MEGOHMS.

CONTACT RESISTANCE: 30 MILLOHMS MAX.

OPERATING VOLTAGE: 500V.

OPERATING TEMPERATURE: -55° CTO+105° C.

MECHANICAL:

CONTACT INSERTION FORCE: 340g MAX.

CONTACT SEPARATION FORCE: 28g MIN.

MATERIAL:

HOUSING: P.B.T+30%GLASS FIBER UL 94V-0 RATED.

INSULATOR COLOR: BLUE, BIACK, WHITE, PC99.
SPECIFICATION TO BE GIVEN BY CLIENT.

CONTACT: PHOSPHER BRONZE OR TIN PLATED.

FINISH:

CONTACT FINISH: GOLD PLATED OVER 50U"NICKELUNDER PLATED.

SOLDER TALL: SN/PB PLATED 100U"OVER 50U"NICKEL UNDER PLATED.

SHELL FINISH: NICKEL(FRONT DHELL)120U" TIN(REAR SHELL)120U"

*WITH#4-40 SCREWLOCK(ASSEMBLED)
*WITH#4-40 SCREWLOCK(UNADDEMBLED)
*RIVET BOARDIOCK

HDR-15s-01-xx-S9



HDR-15s-02-xx-S9



HDR-15s-02A-xx-S9



HDR-15s-02B-xx-S9



HOW TO ORDER
HDR-15S-XX-XX-S9

- SHOUT 9PIN
- 01:FULL GOLD PLATED
- 03:SELECLIVE GOLD PLATED
- 01:BOARD LOCK/HEX SCREW
- 02;RIVET W/ BOARD LOCK
- 02A: RIVET W/BOARD LOCK / HEX SCREW
- 02B: RIVET W/BOARD LOCK/ ATTACHED HEX SCREW
- S:FEMALE
- NO. OF POSITIONS

DE"N	LIN	UNITS	mm	SHEET	mm	WOXCONN ELECTRONIC CO., LTD
CH"K		P/N NO.		REV		
APP"D		D/N NO.	□LP-HDR-004	FILE		NAME HDR 3.08mm 15母（缩9）

unregistered