
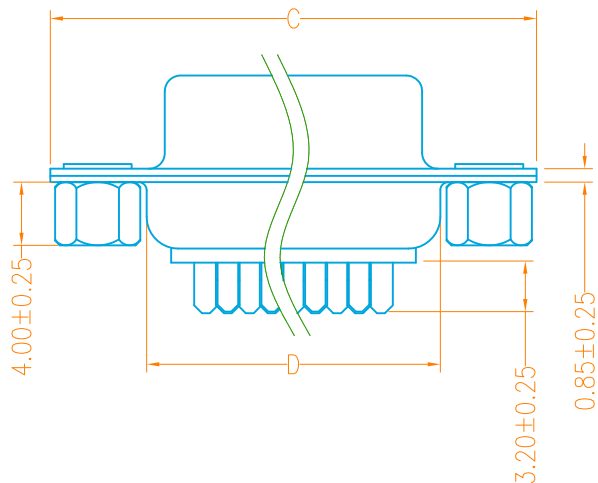
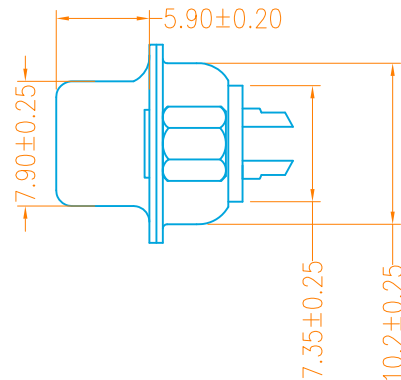


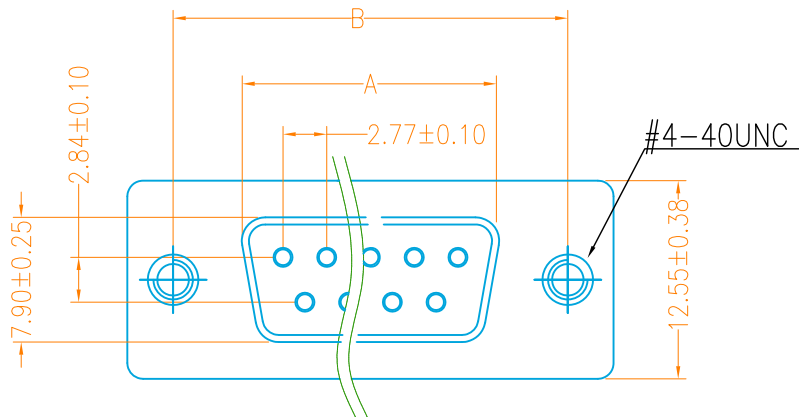

NOTE:

1.MATERIALS AND FINISHED

INSULATOR : PBT+30% GF UL 94V-0,

SHELL : STEEL, NI OR SN FINISHED

CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED

RIVETED INSERT: BRASS MATERIAL ,TIN FINISHED

WITH #4-40 THREADED ASSEMBLED

2.ELECTRICAL CHARACTERISTICS

CURRENT RATING : 1.0 AMP DC

VOLTAGE RATING: 300 V DC

CONTACT RESISTANCE :20 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.

INSULATION RESISTANCE : 1000 MEGAOHMS MIN.

3.ENVIRONMENTAL

OPERATING TEMPERATURE: -55°C ~ +85°C

STORAGE TEMPERATURE:-55°C ~ +105°C

09	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.71
No. of Contact	A±0.25	B±0.25	C±0.38	D±0.25

CUSTOMER



连兴旺电子(深圳)有限公司

LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

一般公差
GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX ±0.15
ANGLES ±2°

制图 (DR):
Kavin
2016.07.05

审核 (CHKD):
品名(TITLE): DB 母头传统型焊线, 后铆4.0螺母

料号(PART NO): LD101-GxxS-BOT

比例(SCALE): 1:8
单位(UNITS): mm
张数(SHEET): 1 OF 1
图幅(SIZE): A4

核准 (APPD):

版本 (REV): A



修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

RoHS
Compliant
2013/95/EC

