



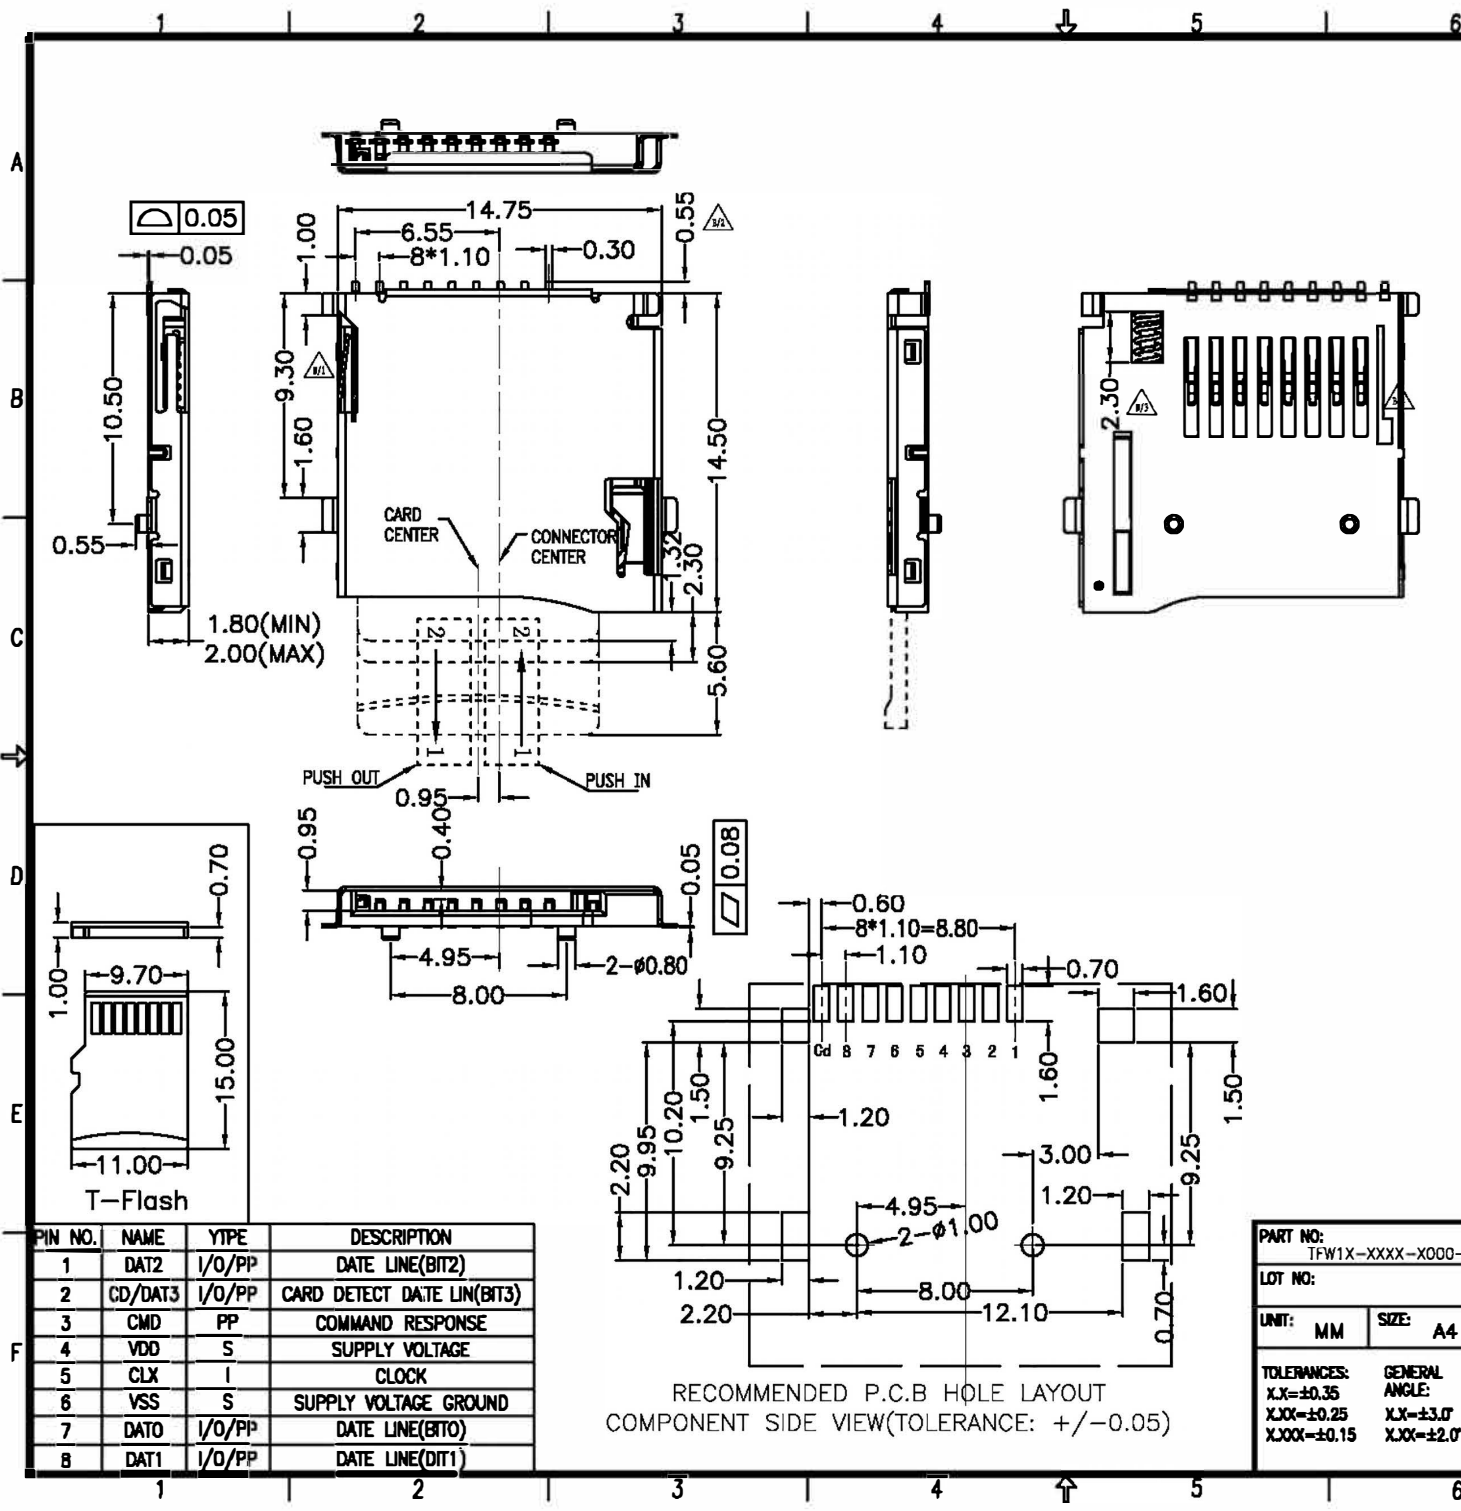

REV.	DESCRIPTION	APPD	DATE
A/1	外壳弹片改直	杨凯	0925'10
A/1	尺寸0.70改为0.55	杨凯	0925'10
A/1	尺寸3.50改为2.30	刘静	1115'11
A/1	主体底部增加孔位	杨凯	0826'12

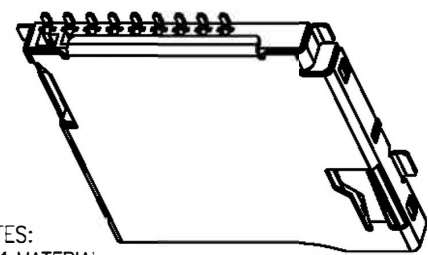

- NOTES:
- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
 - 2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
 - 3.MULTIMEDIA CARD COMPATIBLE

订购须知:TFW1X-XXXX-X000-A

- 1 吸塑盘装
- 2 载带装
- F1 端子镀全金
- S1 端子镀半金雾锡
- N1 外壳镀全镍
- S1 外壳刷金
- 1 不锈钢壳
- 2 铜壳

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

PART NO: TFW1X-XXXX-X000-A		MATERIAL:	
LOT NO:		FINISH:	
UNIT: MM	SIZE: A4	COLOR:	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		DR: PENTIUM 0826'09	
GENERAL ANGLE: X.XX=±3.0° X.XX=±2.0°		CHK:	
APP:		DWG NO: FP-090012	
		SCALE: 1:1	REV: B/4
		SHEET: 1 OF 3	




连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS(SHENZHEN) CO., LTD

T-FLASH 外焊 PUSH




LXW 连兴旺电子(深圳)有限公司
LXWCON ELECTRONICS(SHENZHEN)CO., LTD

REV.	DESCRIPTION	APPD	DATE

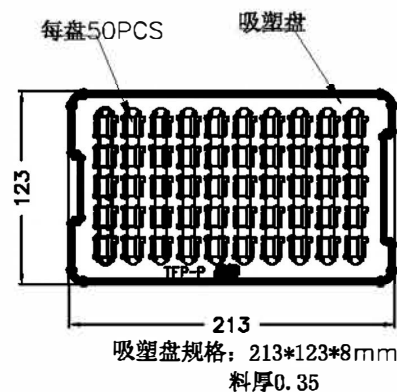



NO. 1

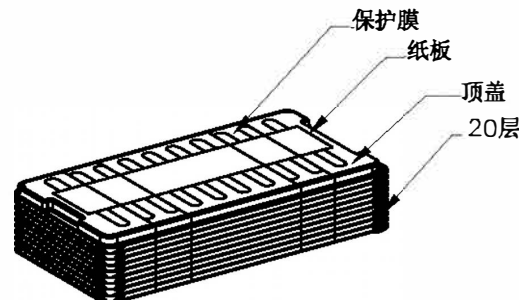


NO. 2

1. 材质要求:
- 1.1 纸箱的材质为A=A; 外形尺寸为26*22.5*19cm;
 - 1.2 PS盘的材质为PS, PS盘的外形尺寸213*123*8mm;
2. 包装要求:
- 2.1 每一盘装50PCS;
 - 2.2 每20盘累叠在一起, 共计1Kset, 上面需放一个空盘, 加一块纸板, 后用PE膜缠绕;
 - 2.3 把累叠好的PS盘叠放入纸箱中共计4Kset;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签;

订购须知: TFW1X-XXXX-X000-A

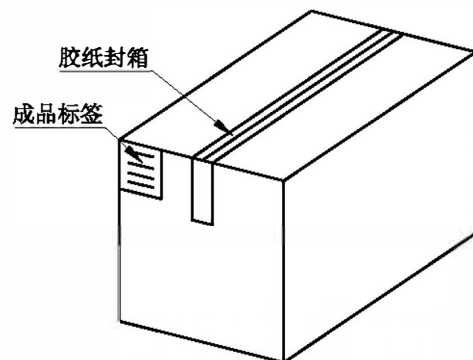


NO. 4

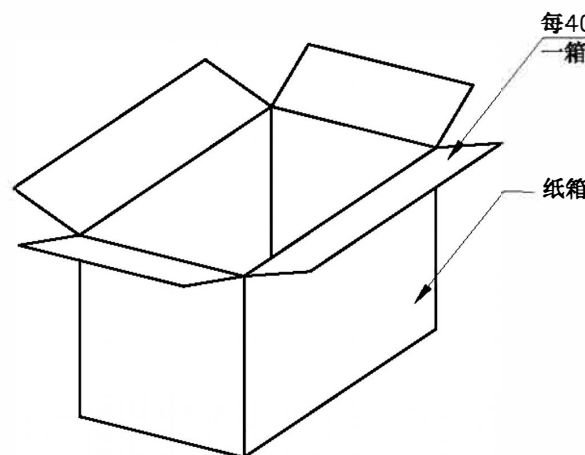


NO. 3

PART NO: TFW1X-XXXX-X000-A		MATERIAL:		 连兴旺电子(深圳)有限公司 LXWCONV ELECTRONICS(SHENZHEN)CO., LTD	
LOT NO:		FINISH:			
UNIT: MM	SIZE: A4	COLOR:		TITLE: T-FLASH 外焊 PUSH	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		DR: PENTUM 0826'09		DWG NO: FP-090012	
GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		CHK:		REV: B/3	
		APP:		SCALE: 1:1	SHEET: 2 OF 3
					

LXW 连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS (SHENZHEN) CO., LTD


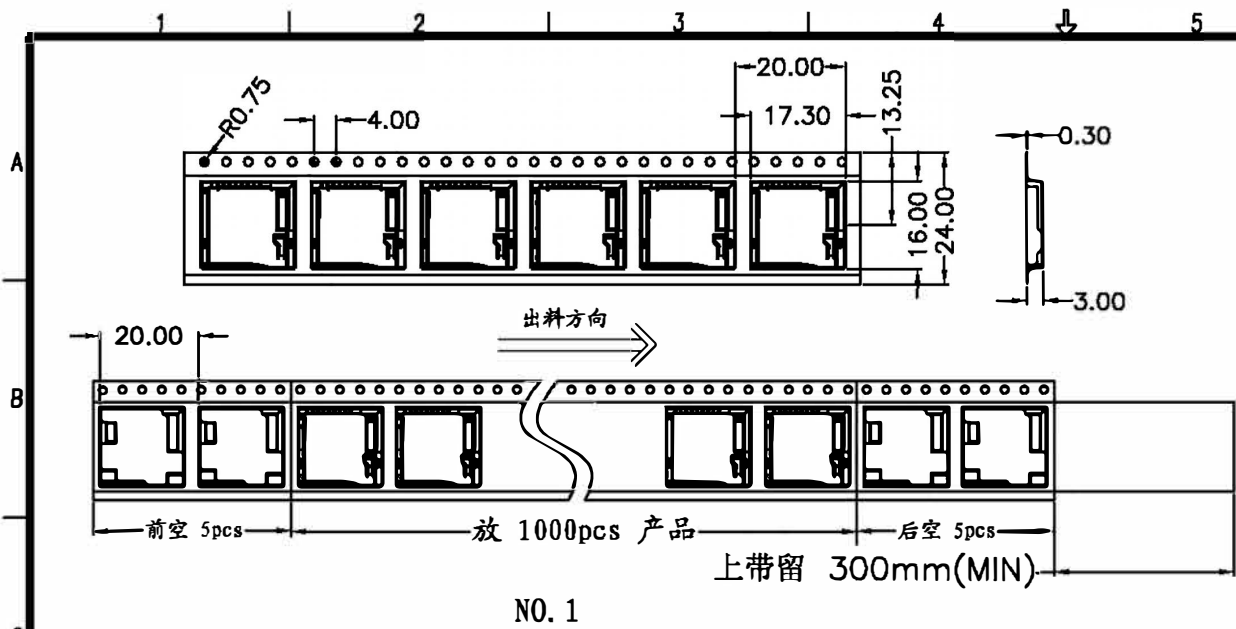


NO. 1

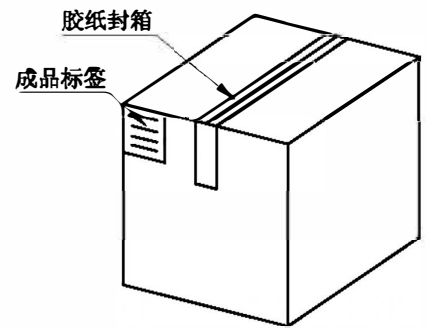


纸箱规格: 340*340*385

NO. 4

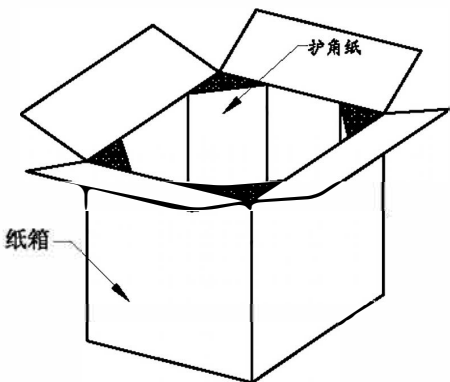

NO. 3


REV.	DESCRIPTION	APPD	DATE

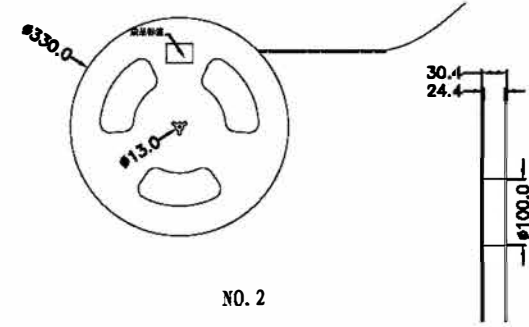

NO. 2

1. 材质要求:
 - 1.1 纸箱的材质为K=K; 外形尺寸为34*34*38.5;
 - 1.2 卷盘的材质为PS, 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
 - 1.3 卷带的材质为PS, 卷带的外形尺寸为20200*24.00*3.0mm;
2. 包装方式:
 - 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
 - 2.2 将包装好的产品从包装机上取下并包装好, 贴上内盘标签;
 - 2.3 把累叠好的12盘叠放入纸箱中共计12Kset, 上下放纸板, 纸箱四个角塞护角纸;
 - 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

订购须知: TFW1X-XXXX-X000-A



PART NO: TFW1X-XXXX-X000-A		MATERIAL:		 连兴旺电子(深圳)有限公司 LXWCONY ELECTRONICS (SHENZHEN) CO., LTD	
LOT NO:		FINISH:			
UNIT: MM	SIZE: A4	COLOR:			
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		TITLE: T-FLASH 外焊 PUSH	
DR: PENTUM 0826'09		CHIC:		DWG NO: FP-090012	
APP:				REV: B/3	
		SCALE: 1:1		SHEET: 3 OF 3	
					

LXW 连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS(SHENZHEN)CO., LTD