

A

B

C

D

E

F

G

H

A

B

C

D





E

F


G

H

MATERIAL
HOUSING : THERMO PLASTIC UL94V-0 BLACK
CONTACT : COPPER ALLOY
PEG : COPPER ALLOY
SPECIFICATION
CURRENT RATING : 0.5A 50V AC/DC
CONTACT RESISTANCE : 55 mΩ MAX
INSULATION RESISTANCE : 500 MΩ MIN AT 500V DC
OPERATING TEMPERATURE : -55°C~80°C

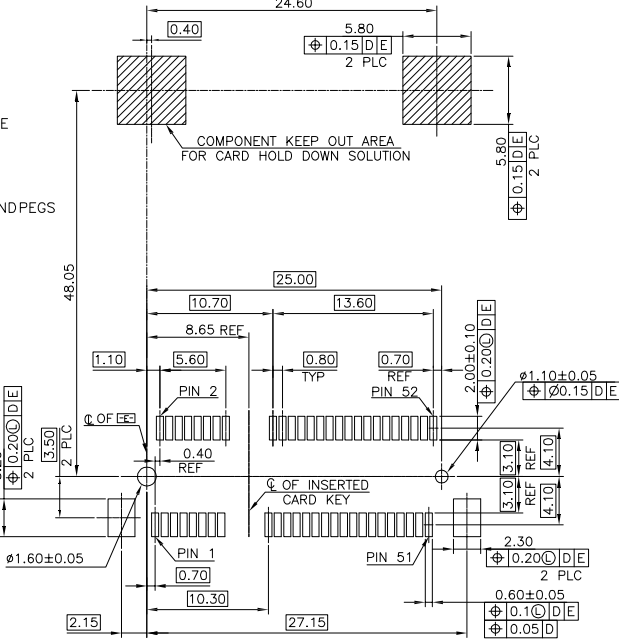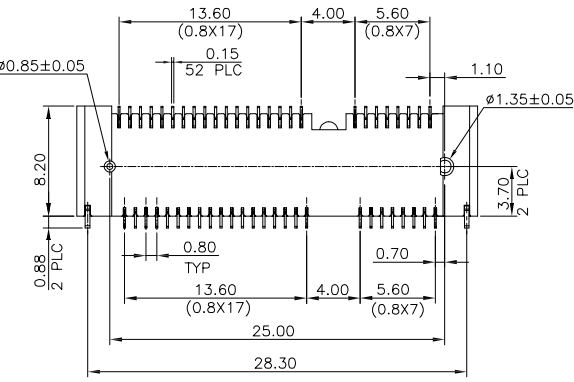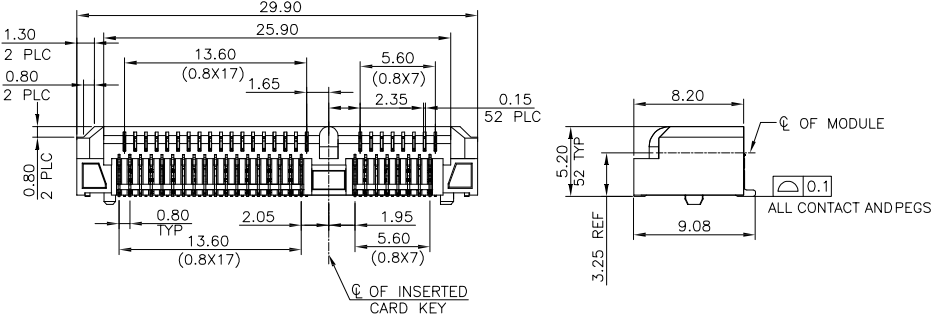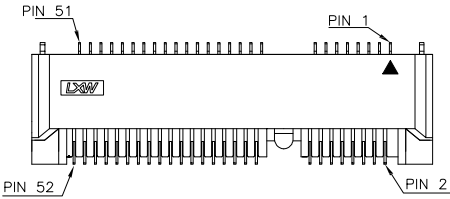

-D- IS THE TOP SURFACE OF PCB.
RECOMMENDED P.C.BOARD PATTERN LAYOUT

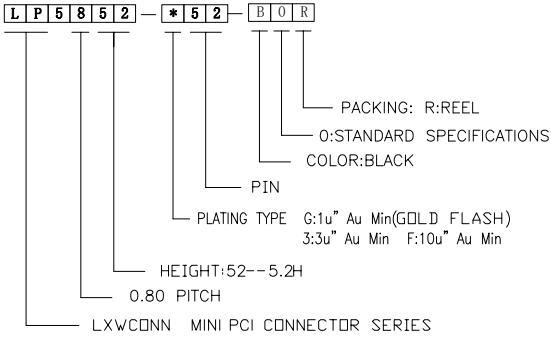

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	版本 (REV) A	一般公差 GENERAL TOLERANCE .X ±0.35 .XX ±0.25 .XXX ±0.10 ANGLES ±1°	制图 (DR): Jerry 2020.03.21	品名(TITLE): 0.80MM PITCH MINI PCI EXPRESS H=5.2mm CONNECTOR	审核 (CHD):	料号(PART NO): LP5852-*52-BOR	比例(SCALE): 1:1	单位(UNITS): mm	张数(SHEET): 1 OF 1	图幅(SIZE): A4
核准 (APPD): Tong 2020.03.21													