


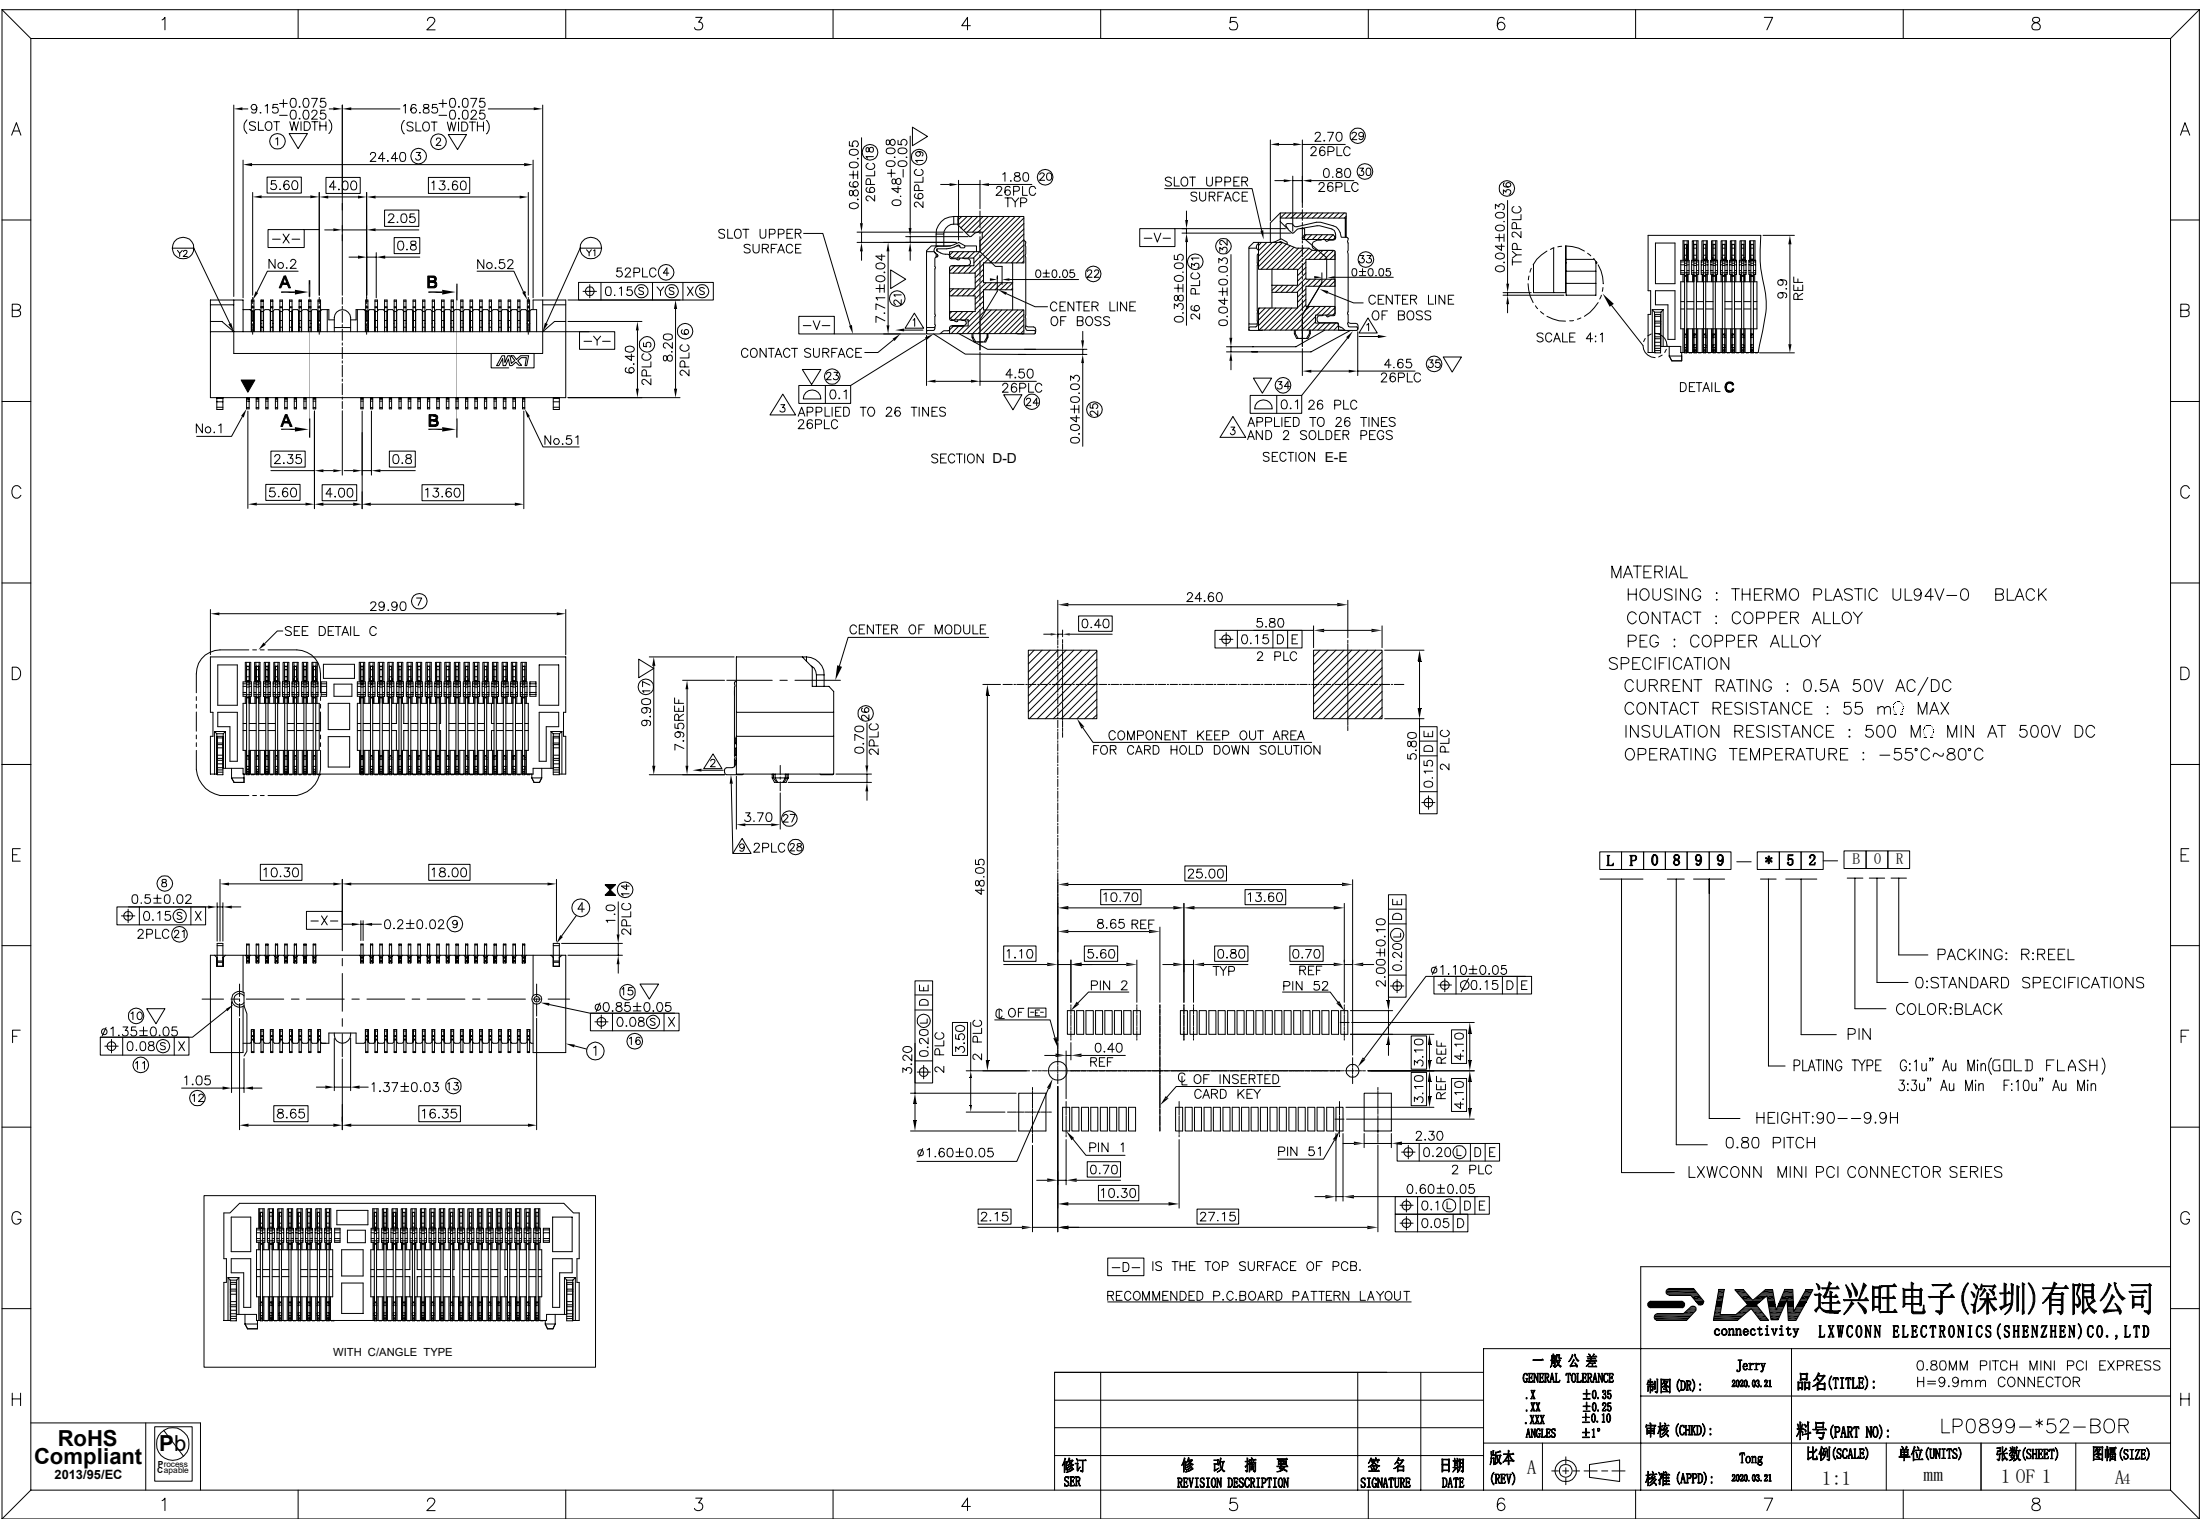

MATERIAL
HOUSING : THERMO PLASTIC UL94V-0 BLACK
CONTACT : COPPER ALLOY
PEG : COPPER ALLOY
SPECIFICATION
CURRENT RATING : 0.5A 50V AC/DC
CONTACT RESISTANCE : 55 mΩ MAX
INSULATION RESISTANCE : 500 MΩ MIN AT 500V DC
OPERATING TEMPERATURE : -55°C~80°C

LP0899- *52- BOR
PACKING: R:REEL
O:STANDARD SPECIFICATIONS
COLOR:BLACK
PIN
PLATING TYPE G:1u" Au Min(GOLD FLASH)
3:3u" Au Min F:10u" Au Min
HEIGHT:90--9.9H
0.80 PITCH
LXWCONN MINI PCI CONNECTOR SERIES

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD

制图 (DR):	Jerry 2020.02.21	品名(TITLE):	0.80MM PITCH MINI PCI EXPRESS H=9.9mm CONNECTOR
审核 (CHD):		料号(PART NO):	LP0899- *52- BOR
核准 (APPD):	Tong 2020.02.21	比例(SCALE):	1:1
张数(SHEET)	1 OF 1	单位(UNITS)	mm
图幅(SIZE)	A4		

RoHS
Compliant
2013/95/EC

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

一般公差 GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX ±0.10
ANGLES ±1°

