
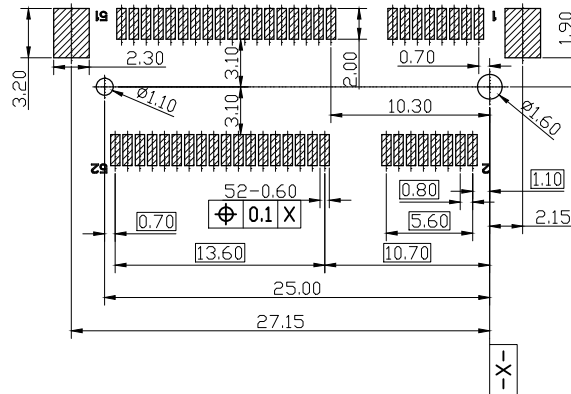
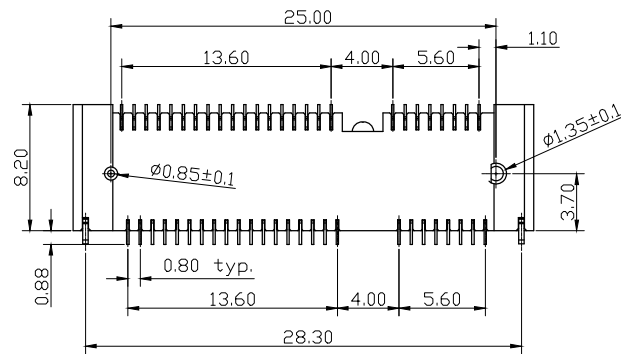

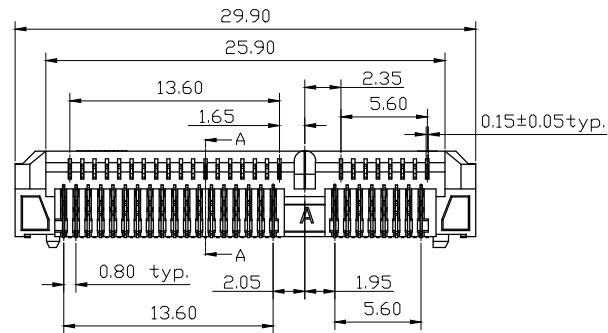
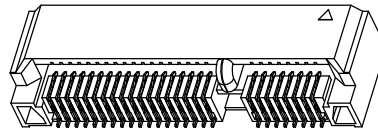


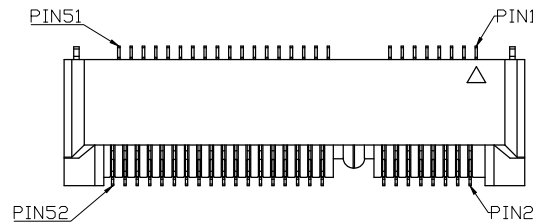

MATERIAL

HOUSING : THERMO PLASTIC UL94V-0 BLACK

CONTACT : COPPER ALLOY

PEG : COPPER ALLOY

SPECIFICATION

CURRENT RATING : 0.5A 50V AC/DC

CONTACT RESISTANCE : 55 mΩ MAX

INSULATION RESISTANCE : 500 MΩ MIN AT 500V DC

OPERATING TEMPERATURE : -55°C~80°C

L P 3 8 5 6 - * 5 2 - B 0 R

PACKING: R:REEL

O:STANDARD SPECIFICATIONS

COLOR:BLACK

PIN

PLATING TYPE G:1u" Au Min(GOLD FLASH)
3:3u" Au Min F:10u" Au Min

HEIGHT:56--5.6H

0.80 PITCH

LXWCONN MINI PCI CONNECTOR SERIES

RECOMMENDED MATING PCB LAYOUT



修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
-----------	------------------------------	-----------------	------------

一般公差 GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX ±0.10
ANGLES ±1°
版本 (REV) A

连兴旺电子(深圳)有限公司 connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD				
制图 (DR): Johnny 2020.03.21	品名(TITLE): 0.80MM PITCH MINI PCI EXPRESS H=5.6mm CONNECTOR			
审核 (CHKD):	料号(PART NO): LP3856-*52-BOR			
核准 (APPD): Tong 2020.03.21	比例(SCALE): 1:1	单位(UNITS): mm	张数(SHEET): 1 OF 1	图幅(SIZE): A4