
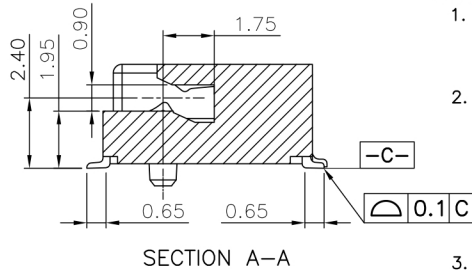


REV.	ECR/N NO./DESCRIPTION	DATE	DRAWN	CHECKED	APPROVE
1	SN17154	12/07'17	Jingyan.Zhao	Vito	Ford
1A	SN18***	11/22'18	Jingyan.Zhao	Vito	Ford

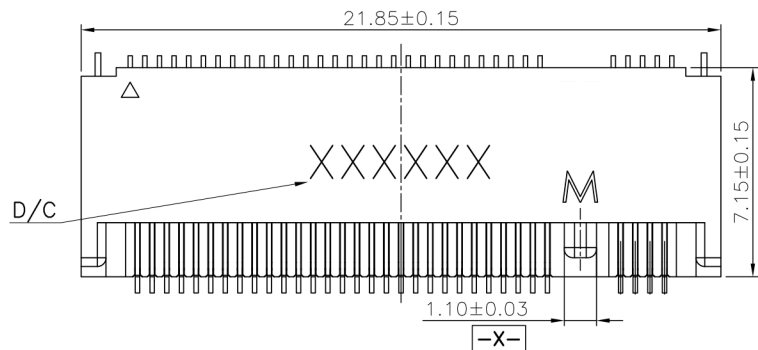




- NOTES:
- MATERIAL SPECIFICATION:
 - 1-1. HOUSING: LCP+40%GF, UL94V-0, COLOR: BLACK.
 - 1-2. CONTACT: COPPER ALLOY .
 - 1-3. SMT TAB: S50C.
 - PLATING SPECIFICATION:
 - 2-1. CONTACT:
 - 50u" MIN.NICKEL UNDER PLATING OVER ALL.
 - G/F PLATING ON SOLDER AREA.
 - GOLD PLATING ON CONTACT AREA:SEE TABLE
 - 2-2. SMT TAB:
 - 50u" MIN. NICKEL UNDER PLATING OVER ALL .
 - 80u" MIN. MATTE TIN PLATING ON SOLDER AREA.
 - HF COMPLIANT,ROHS COMPLIANT.
 - DATE CODE: XXXXXX
 - DAY
 - WEEK
 - YEAR
 - MECHANICAL PERFORMANCE:
 - 5-1. DURABILITY: SEE TABLE
 - ELECTRICAL PERFORMANCE:
 - 6-1. CURRENT: 0.5A PER PIN.
 - 6-2. LLCR: INITIAL 55mΩ MAX. ; FINAL ΔLLCR=20mΩ MAX..
 - IR REFLOW :

THE TEMPERATURE SHALL BE 260±5°C MAINTAINING 10±1 SECONDS.
 - PRODUCT NUMBER NOTE

APCI0262-XXXXX-XXXXX-XXXXX-XXXXX

 - PACKING TYPE
 - PRODUCT SERIAL NUMBER
 - K:RoHS COMPLIANT/P:HF COMPLIANT
 - TYPE SERIAL NUMBER
 - PRODUCT TYPE
 - FINISHED PRODUCT

APCI0262-P004A	30u" MIN. GOLD	60 CYCLES.
APCI0262-P003A	15u" MIN. GOLD	25 CYCLES.
APCI0262-P002A	10u" MIN. GOLD	25 CYCLES.
APCI0262-P001A	1~3u" MIN. GOLD	25 CYCLES.
PART NO.	CONTACT PLATING	DURABILITY

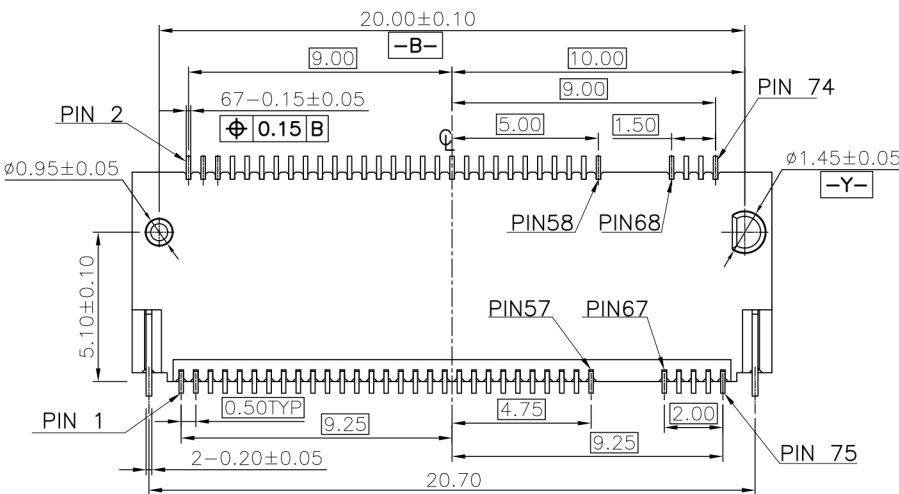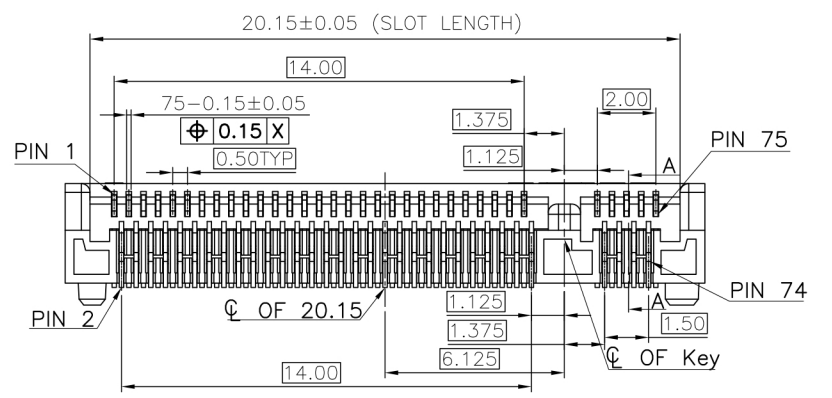

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	SEE TABLE		
X ± 0.35	X° ± 3°	APPROVED BY	Ford		
XX ± 0.25	X° ± 2°	CHECKED BY	Vito		
.XXX ± 0.15	.XX° ± 1°	DRAWN BY	Jinjin.Tu		
CUSTOMER DRAWING		DWG NO.		AP-APCI0262	
SIZE	UNITS	SHEET	SCALE	REV	
A4	MM[INCH]				
		1 / 4	4 : 1	1A	

LXW 连兴旺电子(深圳)有限公司
LXWCON ELECTRONICS(SHENZHEN)CO.,LTD

