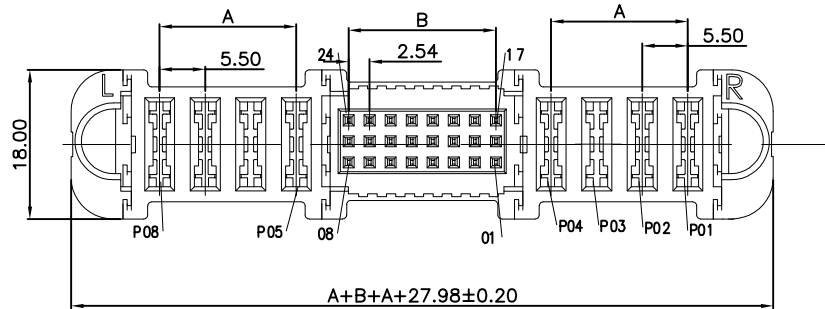


SECTION A-A

NOTES:

MATERIAL:

1.HOUSING:THERMO-PLASTIC. UL 94V-0 NATURE

2.CONTACT:COPPER ALLOY

CONTACT:SEE ORDER INF ORMATION;

SOLDER:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL

ELECTRICAL:



1.CURRENT RATING:60 A MAX

2.WITHSTANDING VOLTAGE:600V AC for 1 min


3.INSULATION RESISTANCE:1000MΩ MIN

ENVIRONMENTAL:

1. OPERATING TEMPERATURE:-55°C TO +125°C.

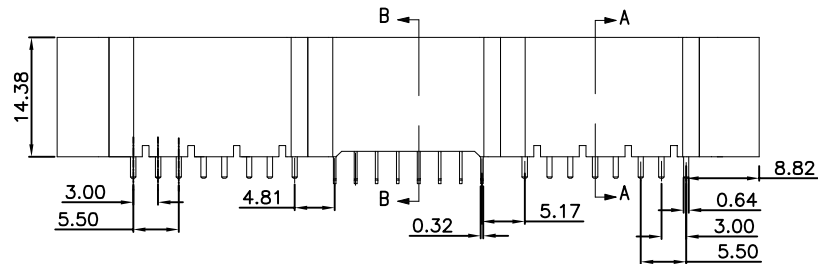


SECTION B-B




TAIL	C	D
1	2.60	3.28
2	2.83	3.28

SIGNAL	B
06	2.54
12	7.62
18	12.70
24	17.78
30	22.86
36	27.94

POWER	A
01	N/A
02	5.50
03	11.00
04	16.50
05	22.00
06	27.50
07	33.00
08	38.50
09	44.00
10	49.50

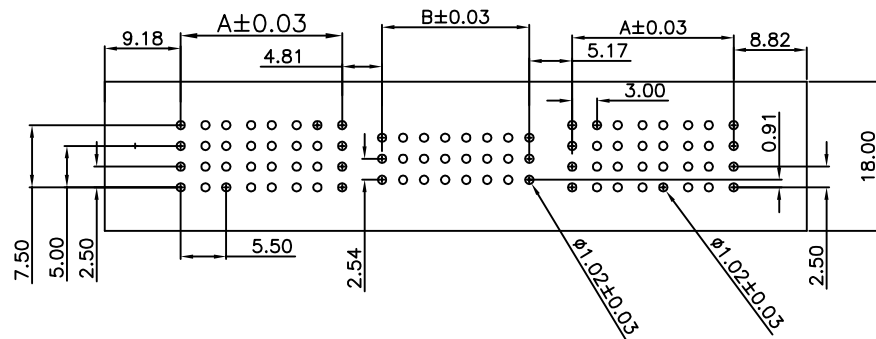

Recommended PC board pattern
(TOP VIEW)

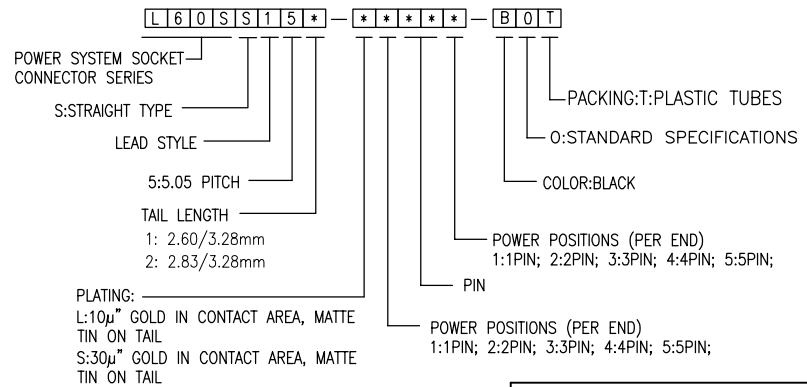

RoHS
Compliant
2013/05/EC



LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE	版本 (REV) A	一般公差 GENERAL TOLERANCE .X ±0.35 .XX ±0.25 .XXX ±0.10 ANGLES ±1°	制图 (DR): Jerry 2020.01.15	品名(TITLE): ET60S STRAIGHT TYPE SOCKET
审核 (CHD):	核准 (APPD): Tong 2020.01.15	比例(SCALE): 1:1	单位(UNITS): mm	张数(SHEET): 1 OF 1	图幅(SIZE): A4	料号(PART NO): L60SS15*-*****-B0T	