


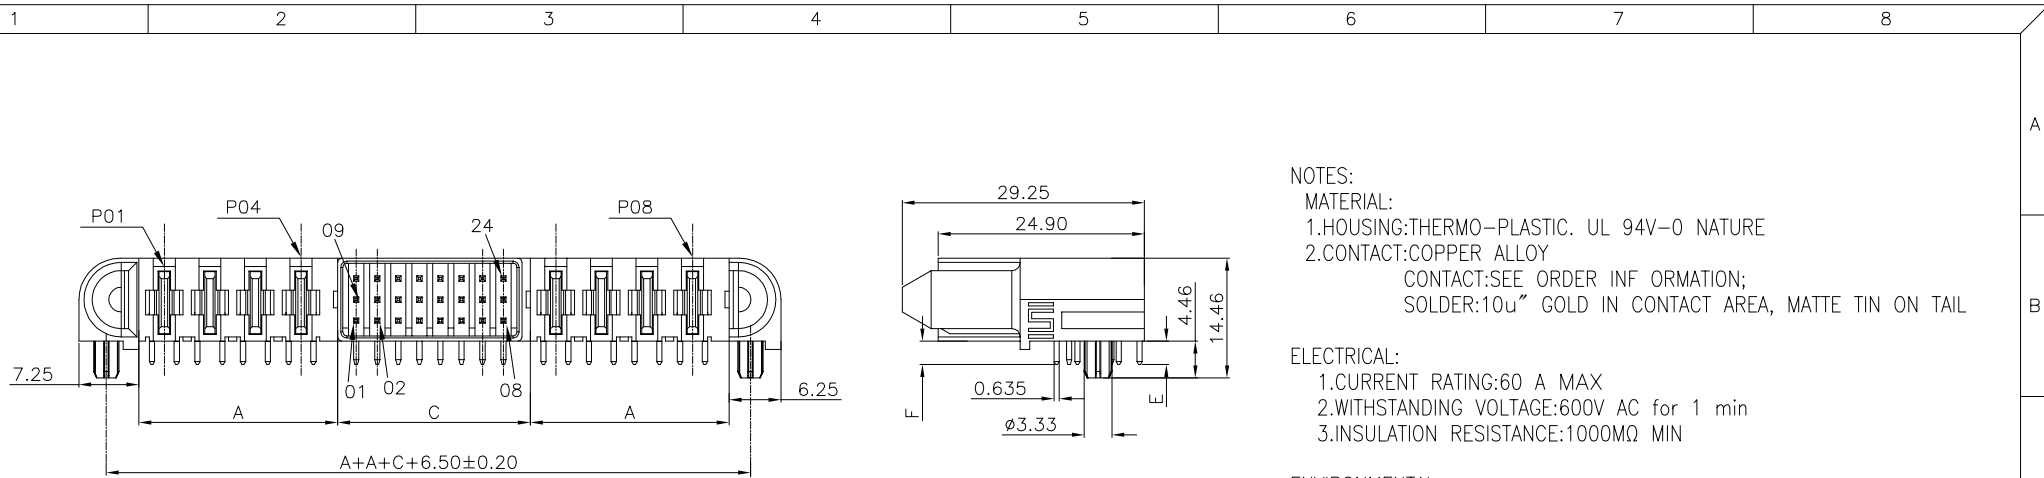

NOTES:

MATERIAL:

1.HOUSING:THERMO-PLASTIC. UL 94V-0 NATURE

2.CONTACT:COPPER ALLOY

CONTACT:SEE ORDER INF ORMATION;

SOLDER:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL

ELECTRICAL:




1.CURRENT RATING:60 A MAX

2.WITHSTANDING VOLTAGE:600V AC for 1 min

3.INSULATION RESISTANCE:1000MΩ MIN

ENVIRONMENTAL:

1. OPERATING TEMPERATURE:-55°C TO +125°C.

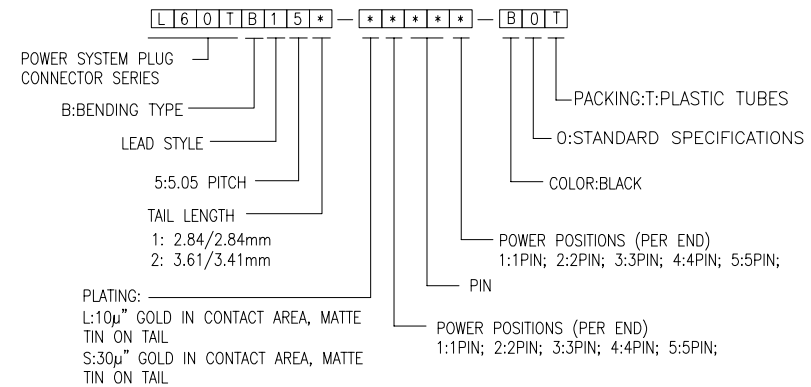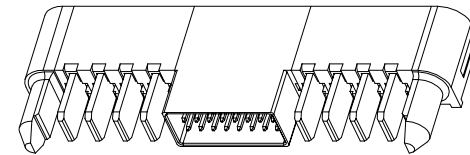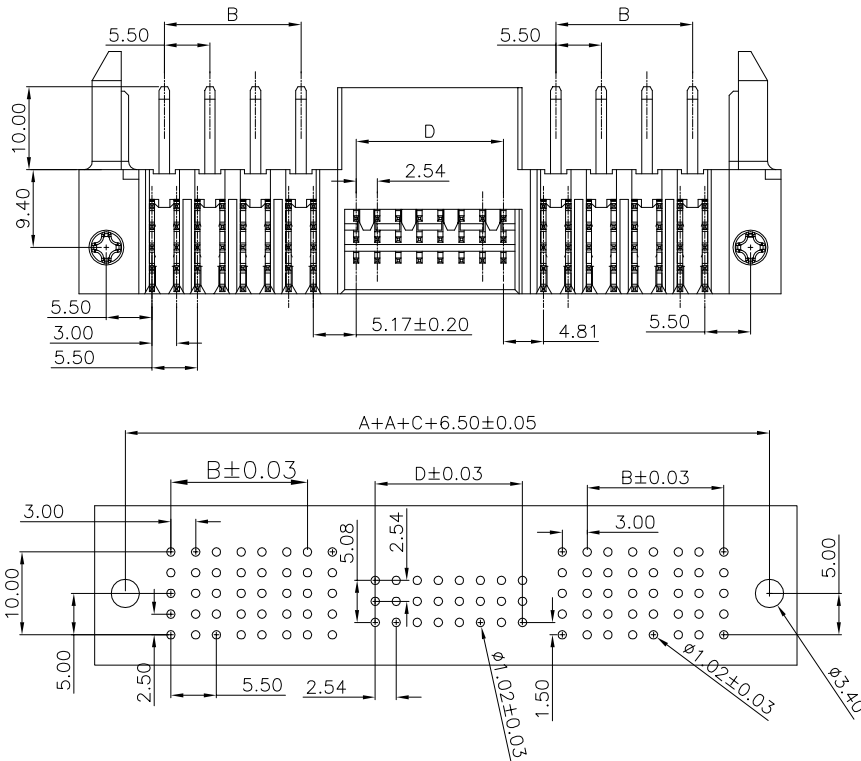

TAIL	E	F
1	2.84	2.84
2	3.61	3.41

SIGNAL	C	D
06	8.02	2.54
12	13.10	7.62
18	18.18	12.70
24	23.26	17.78
30	28.34	22.86
36	33.42	27.94

POWER	A	B
01	7.50	N/A
02	13.00	5.50
03	18.50	11.00
04	24.00	16.50
05	29.50	22.00
06	35.00	27.50
07	40.50	33.00
08	46.00	38.50
09	51.50	44.00
10	57.00	49.50

Recommended PC board pattern
(TOP VIEW)

RoHS
Compliant
2013/05/EC

1 2 3 4 5 6 7 8

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

版本 (REV)	一般公差 GENERAL TOLERANCE
A	.X ±0.35 .XX ±0.25 .XXX ±0.10 ANGLES ±1°

 连兴旺电子(深圳)有限公司 connectivity LXWCONN ELECTRONICS(SHENZHEN) CO., LTD									
制图 (DR):	Jerry 2020.01.15	品名(TITLE):	ET60T BENDING TYPE PLUG						
审核 (CHKD):		料号(PART NO):	L60TB15*-*****-B0T						
核准 (APPD):	Tong 2020.01.15	比例(SCALE):	1:1	单位(UNITS):	mm	张数(SHEET):	1 OF 1	图幅(SIZE):	A4