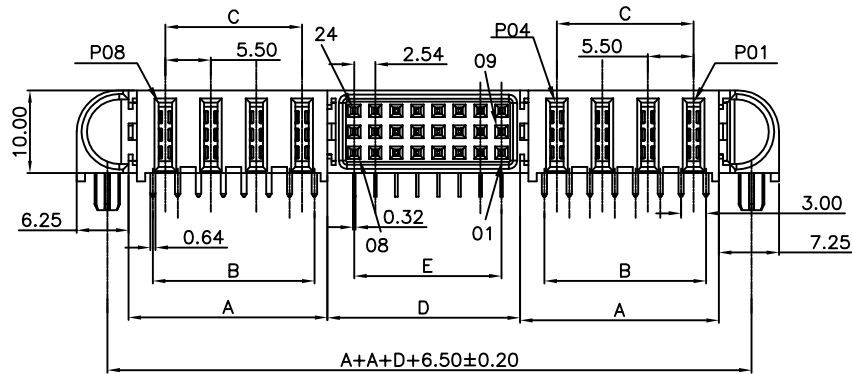


NOTES:

MATERIAL:


- 1.HOUSING:THERMO-PLASTIC. UL 94V-0 NATURE
- 2.CONTACT:COPPER ALLOY
- CONTACT:SEE ORDER INF ORMATION;
- SOLDER:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL

ELECTRICAL:

- 1.CURRENT RATING:60 A MAX
- 2.WITHSTANDING VOLTAGE:600V AC for 1 min
- 3.INSULATION RESISTANCE:1000MΩ MIN

ENVIRONMENTAL:




1. OPERATING TEMPERATURE:-55°C TO +125°C.

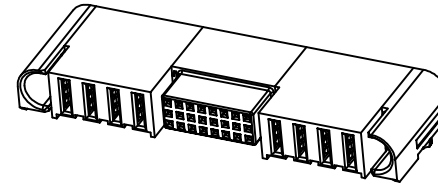

TAIL	F	G
1	2.84	2.84
2	3.61	3.41

SIGNAL	D	E
06	8.02	2.54
12	13.10	7.62
18	18.18	12.70
24	23.26	17.78
30	28.34	22.86
36	33.42	27.94

POWER	A	B	C
01	7.50	N/A	N/A
02	13.00	8.50	5.50
03	18.50	14.00	11.00
04	24.00	19.50	16.50
05	29.50	25.00	22.00
06	35.00	30.50	27.50
07	40.50	36.00	33.00
08	46.00	41.50	38.50
09	51.50	47.00	44.00
10	57.00	52.50	49.50

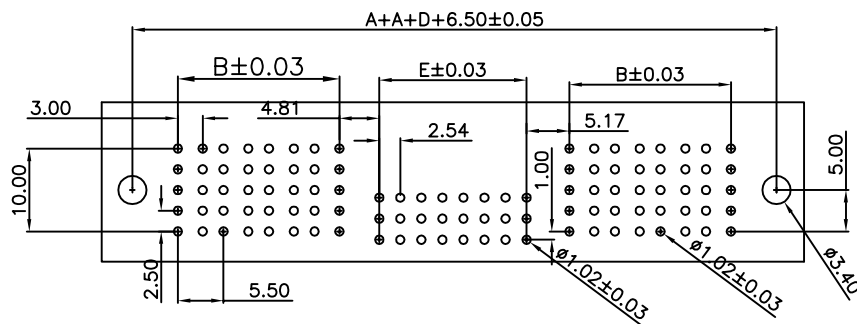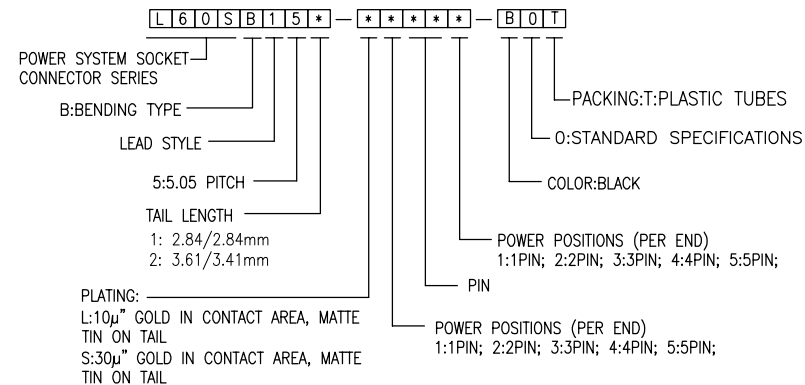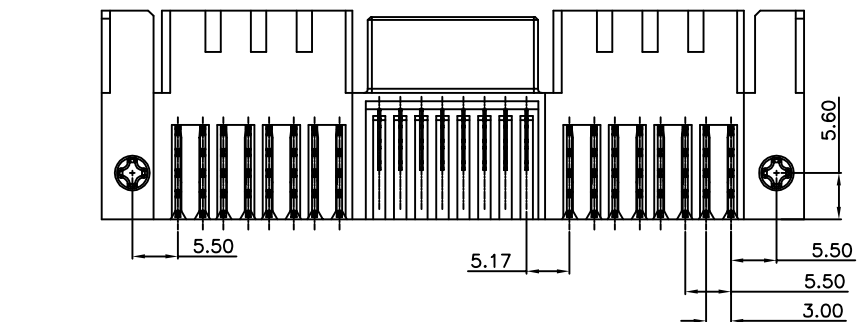

Recommended PC board pattern
(TOP VIEW)

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR):	Jerry 2020.01.15	品名(TITLE):	ET60S BENDING TYPE SOCKET
审核 (CHD):		料号(PART NO):	L60SB15*-*****-B0T
核准 (APPD):	Tong 2020.01.15	比例(SCALE):	1:1
单位(UNITS):	mm	张数(SHEET):	1 OF 1
图幅(SIZE):	A4		



修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

一般公差 GENERAL TOLERANCE	
.X ±0.35	
.XX ±0.25	
.XXX ±0.10	
ANGLES ±1°	

