


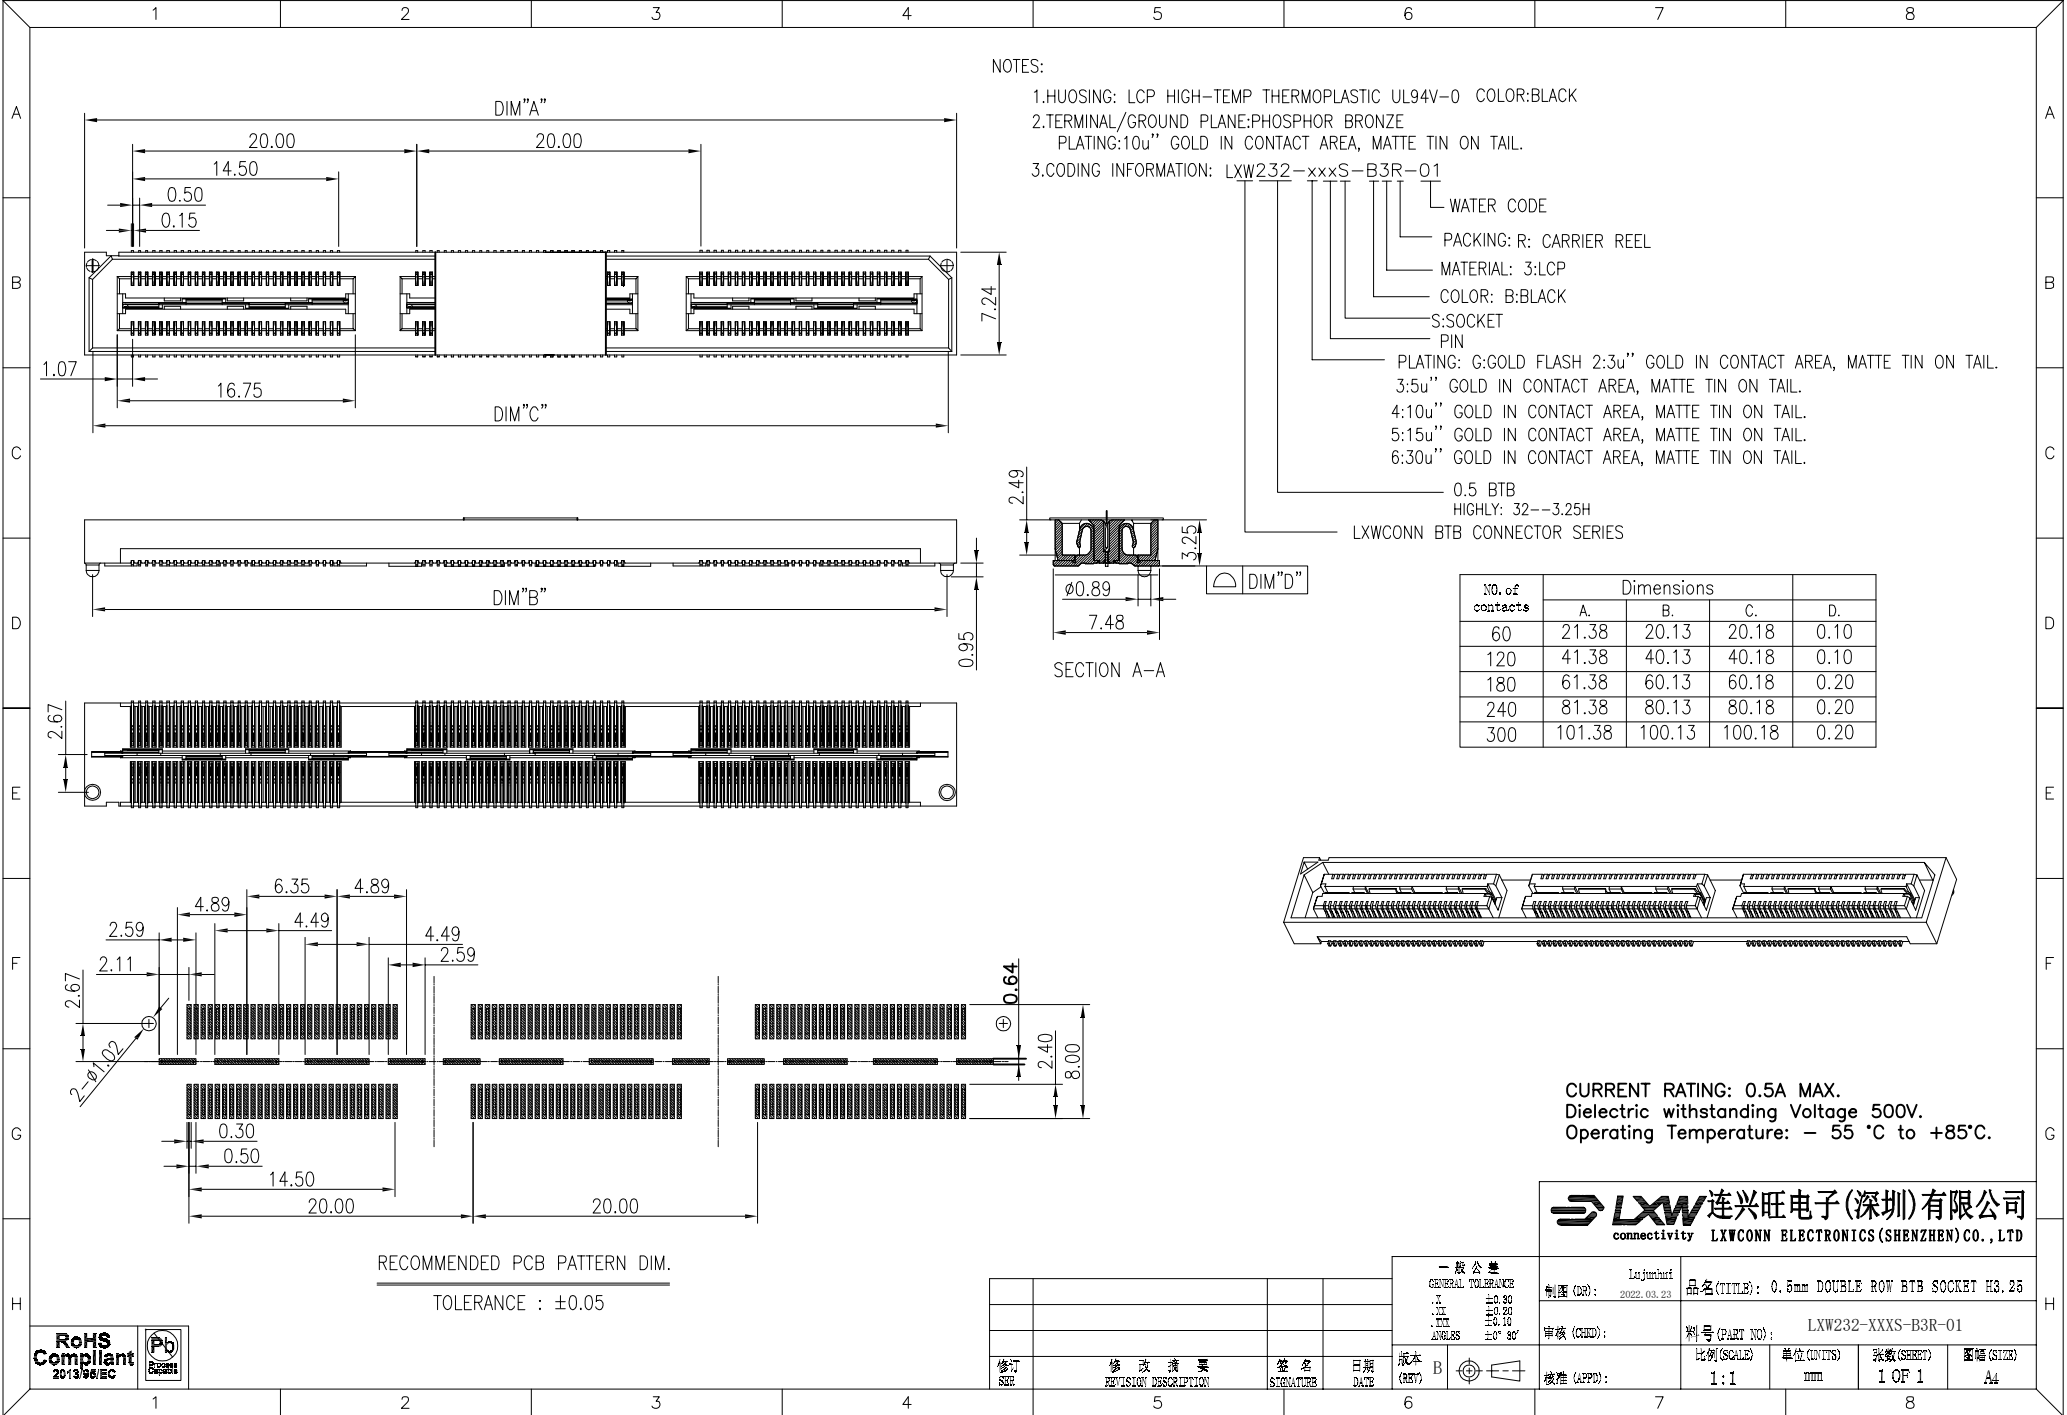


NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
2.TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
3.CODING INFORMATION: LXW232-xxxS-B3R-01

- WATER CODE
PACKING: R: CARRIER REEL
MATERIAL: 3:LCP
COLOR: B:BLACK
S:SOCKET
PIN
PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.

- 0.5 BTB
HIGHLY: 32--3.25H
LXWCONN BTB CONNECTOR SERIES

NO. of contacts	Dimensions			
	A.	B.	C.	D.
60	21.38	20.13	20.18	0.10
120	41.38	40.13	40.18	0.10
180	61.38	60.13	60.18	0.20
240	81.38	80.13	80.18	0.20
300	101.38	100.13	100.18	0.20



CURRENT RATING: 0.5A MAX.
Dielectric withstanding Voltage 500V.
Operating Temperature: - 55 °C to +85°C.

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR):	Lujunhui	品名 (TITLE):	0.5mm DOUBLE ROW BTB SOCKET H3.25
审核 (CND):		料号 (PART NO):	LXW232-XXXS-B3R-01
核准 (APPD):		比例 (SCALE):	1:1
		单位 (UNITS):	mm
		张数 (SHEET):	1 OF 1
		图幅 (SIZE):	A4



修订 (REV):	修改摘要 (REVISION DESCRIPTION):	签名 (SIGNATURE):	日期 (DATE):

一般公差 (GENERAL TOLERANCE):	版本 (REV):
.X ±0.50	B
.Y ±0.20	
.Z ±0.10	
ANGLES ±0° 30°	

