

NOTES:


- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:CREAM-COLOURED
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LB100-GxxP-COR

PACKING:
R: CARRIER REEL
STANDARD TYPE
COLOR:CREAM-COLOURED
PLUG
PIN
PLATING: G:GOLD FLASH
0.8 BTB SIDE-INSERTED TYPE
LXWCONN BTB CONNECTOR SERIES


NO. of contacts	Dimensions			
	A.	B.	C.	D.
4	3.35	0.80	2.35	2.60
6	4.15	1.60	3.15	3.40
8	4.95	2.40	3.95	4.20
10	5.75	3.20	4.75	5.00
12	6.55	4.00	5.55	5.80
14	7.35	4.80	6.35	6.60
16	8.15	5.60	7.15	7.40
18	8.95	6.40	7.95	8.20
20	9.75	7.20	8.75	9.00
22	10.55	8.00	9.55	9.80
24	11.35	8.80	10.35	10.60
26	12.15	9.60	11.15	11.40
28	12.95	10.40	11.95	12.20
30	13.75	11.20	12.75	13.00
32	14.55	12.00	13.55	13.80
34	15.35	12.80	14.35	14.60
36	16.15	13.60	15.15	15.40
38	16.95	14.40	15.95	16.20
40	17.75	15.20	16.75	17.00
42	18.55	16.00	17.55	17.80
44	19.35	16.80	18.35	18.60
46	20.15	17.60	19.15	19.40
48	20.95	18.40	19.95	20.20
50	21.75	19.20	20.75	21.00
52	22.55	20.00	21.55	21.80

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD


制图 (DR):	Kavin	品名(TITLE):	0.8mm 侧插BTB PLUG
审核 (CHKD):		料号(PART NO):	LB100-GxxP-COR
比例(SCALE):	1:8	单位(UNITS):	mm
张数(SHEET):	1 OF 1	图幅(SIZE):	A4



MATING HEIGHT
SCALE:1.25:1

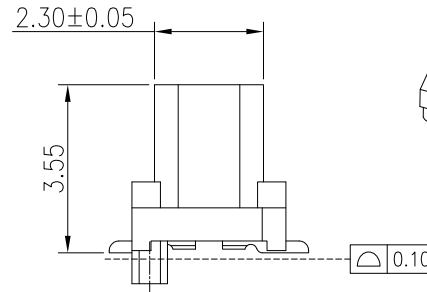

3D VIEW

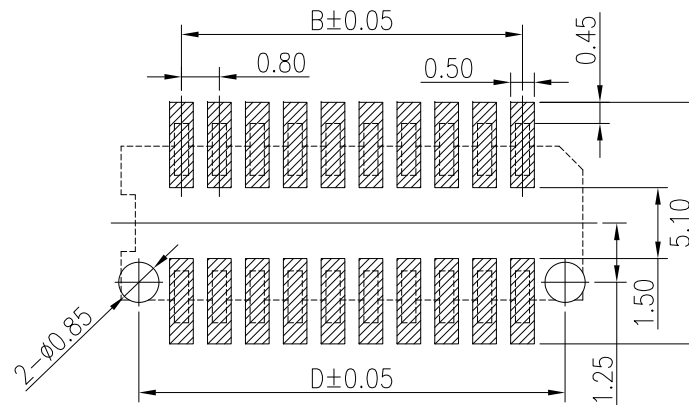

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

修订 SER	新增焊锡脚位尺寸	签名 SIGNATURE	日期 DATE
	修改摘要 REVISION DESCRIPTION	Kavin	08/15/17

一般公差 GENERAL TOLERANCE	±0.25
.X	±0.15
.XX	±0.10
.XXX	±0.05
ANGLES	±1°

