
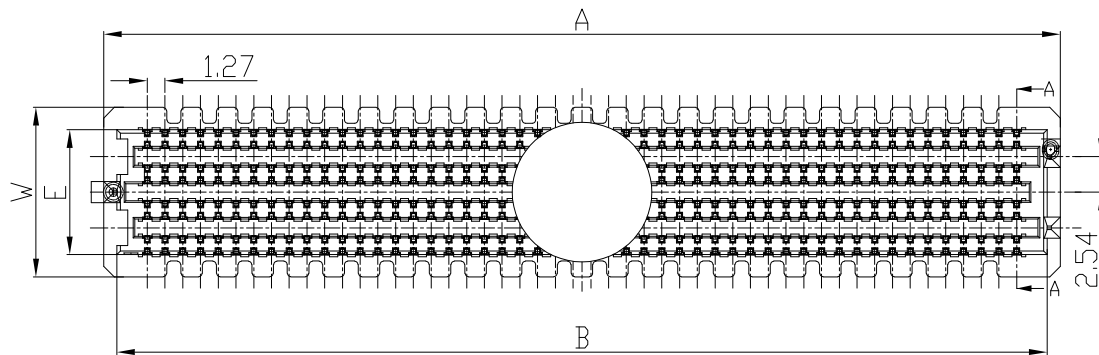


SPECIFICATIONS

- 1.CURRENT RATING: 1.0A
- 2.VOLTAGE RATING 240VAC
- 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
- 4.OPERATING HUMIDITY RANGE:90% TO 95%.
- 5.WITHSTANDING VOLTAGE:700V AC/MINUTE.

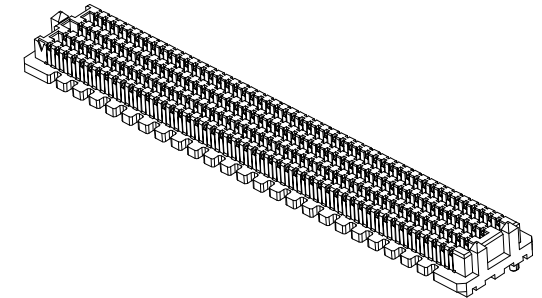

LB19** - **P - B*R02

02:95.5% TIN/3.8% SILVER/.7%
COPPERCHARGE TAIL

PACKING: R:REEL

ROWS:4:4ROWS, 5:5ROWS, 6:6ROWS, 8:8ROWS,
A:10ROWS. C:12ROWS. D:14ROWS

COLOR:BLACK

P: PLUG

PIN

PLATING: G:GOLD FLASH F:10u"Min镀金
D:15u"Min镀金 E:30u"Min镀金

HEIGHT20-2.0H, 30-3.0H, 35-3.5H,55-5.5H.

9:1.27 BTB

LXWCONN BTB CONNECTOR SERIES

TABLE 2			
ROWS	W	G	E
4	7.06	2.01	3.86
5 OR 6	9.60	3.05	6.40
8	12.14	3.05	8.94
10	14.68	3.05	11.48
12	17.22	3.05	14.02
14	19.76	3.05	16.56

TABLE 4	
POSITION	COPLANARITY
10 PIN	0.15
30 PIN	0.20
40 PIN	0.23
50 PIN	0.23

TABLE 3				
No OF ROWS	A	B	C	D
10	17.68	15.80	11.43	16.28
15	24.03	22.15	17.78	22.63
19	29.11	27.23	22.86	27.71
20	30.38	28.50	24.13	28.98
25	36.73	34.85	30.48	35.33
30	43.08	41.20	36.83	41.68
40	55.78	53.90	49.53	54.38
50	68.48	66.60	62.23	67.08


TABLE 5 STACK HEIGHT				
	5.0	6.0	6.5	7.5
2.0	7.00	8.00	8.50	9.50
3.0	8.00	9.00	9.50	10.50
3.5	8.50	9.50	10.00	11.00
5.5	NA	NA	12.00	NA

TABLE 1	
HEIGHT	H1
2.0	5.61
3.0	6.60
3.5	7.11
5.5	9.12

RoHS
Compliant
2013/05/EC



一般公差
GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX ±0.10
ANGLES ±1°



LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR): Jerry 2020.06.21 品名(TITLE): SEAM 1.27 PITCH PLUG
审核 (CHKD): 料号(PART NO): LB19** - **P - B*R02
核准 (APPD): Tong 2020.06.21 比例(SCALE): 1:1 单位(UNITS): mm 张数(SHEET): 1 OF 1 图幅(SIZE): A4

修订
SBR

修改摘要
REVISION DESCRIPTION

签名
SIGNATURE

日期
DATE

版本
(REV) A




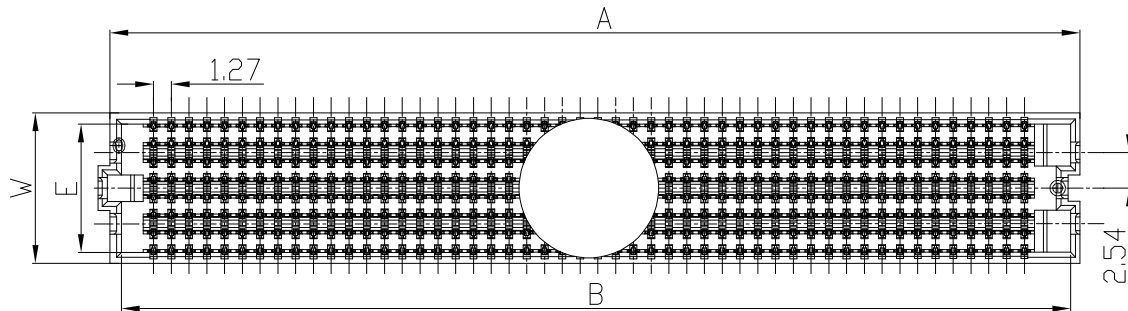


TABLE 5

SPECIFICATIONS

- 1.CURRENT RATING: 1.0A
- 2.VOLTAGE RATING 240VAC
- 3.OPERATING TEMPERATURE RANGE:-55°C TO +125°C
- 4.OPERATING HUMIDITY RANGE:90% TO 95%.
- 5.WITHSTANDING VOLTAGE:700V AC/MINUTE.

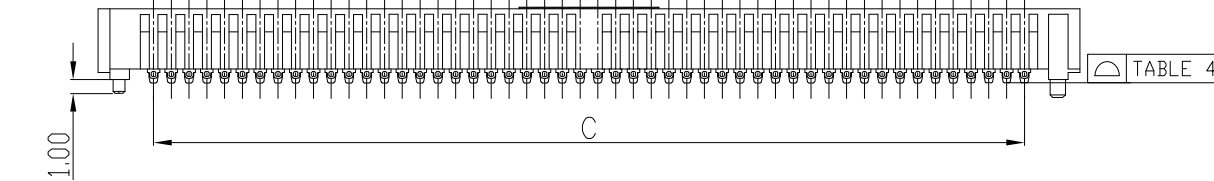


TABLE 4

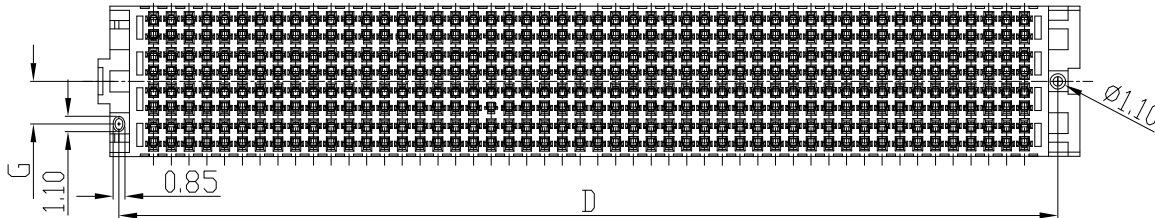
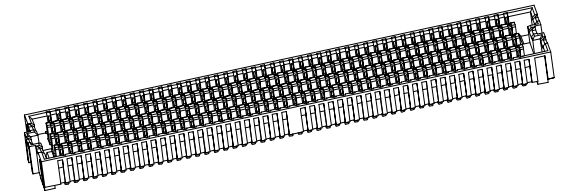



TABLE 2			
ROWS	W	G	E
4	5.66	2.01	4.09
5 OR 6	8.20	3.05	6.63
8	10.74	3.05	9.17
10	13.28	3.05	11.71
12	15.82	3.05	14.25
14	18.36	3.05	16.79

TABLE 4	
POSITION	COPLANARITY
10 PIN	0.15
30 PIN	0.20
40 PIN	0.23
50 PIN	0.23

TABLE 3				
No OF ROWS	A	B	C	D
10	18.52	17.02	11.43	16.28
15	24.87	23.37	17.78	22.63
19	29.95	28.45	22.86	27.71
20	31.22	29.72	24.13	28.98
25	37.57	36.07	30.48	35.33
30	43.92	42.42	36.83	41.68
40	56.62	55.12	49.53	54.38
50	69.32	67.82	62.23	67.08

TABLE 1	
HEIGHT	H
5.0	5.05
6.0	6.05
6.5	6.55
7.5	7.54

RoHS
Compliant
2013/09/EC



TABLE 5 STACK HEIGHT				
	5.0	6.0	6.5	7.5
2.0	7.00	8.00	8.50	9.50
3.0	8.00	9.00	9.50	10.50
3.5	8.50	9.50	10.00	11.00
5.5	NA	NA	12.00	NA

L B 1 9 * * - * * * S - B * R 0 2

- 02:95.5% TIN/3.8% SILVER/.7% COPPERCHARGE TAIL
- PACKING: R:REEL
- ROWS:4:4ROWS,5:5ROWS,6:6ROWS,8:8ROWS, A:10ROWS.C:12ROWS.D:14ROWS
- COLOR:BLACK/WHITE
- S: SOCKET
- PIN
- PLATING: G:GOLD FLASH F:10u"Min镀金 D:15u"Min镀金 E:30u"Min镀金
- HEIGHT:50-5.05H, 60-6.05H, 65-6.55H,75-7.54H.
- 9:1.27 BTB

LXWCONN BTB CONNECTOR SERIES

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR): Jerry 2020.06.21 品名(TITLE): SEAF 1.27 PITCH SOCKET
审核 (CHKD): 核料 (PART NO): LB19**-***S-B*R02
核准 (APPD): Tong 2020.06.21 比例 (SCALE) 1:1 单位 (UNITS) mm 张数 (SHEET) 1 OF 2 图幅 (SIZE) A4

修订 SER 修改摘要 REVISION DESCRIPTION 签名 SIGNATURE 日期 DATE 版本 (REV) A

一般公差 GENERAL TOLERANCE
.1 ±0.35
.1X ±0.25
.1XX ±0.10
ANGLES ±1°

