
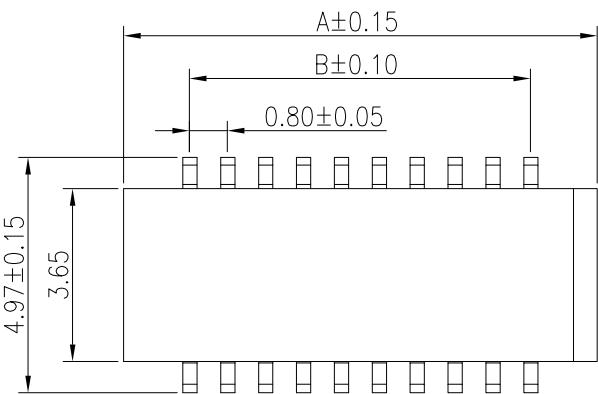


MATING HEIGHT
SCALE:1.25:1





NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:CREAM-COLOURED
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LB100-GxxS-COR

PACKING:
R: CARRIER REEL
STANDARD TYPE
COLOR:CREAM-COLOURED
SOCKTE
PIN
PLATING: G:GOLD FLASH
0.8 BTB SIDE-INSERTED TYPE
LXWCONN BTB CONNECTOR SERIES

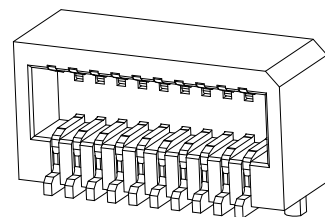

3D VIEW

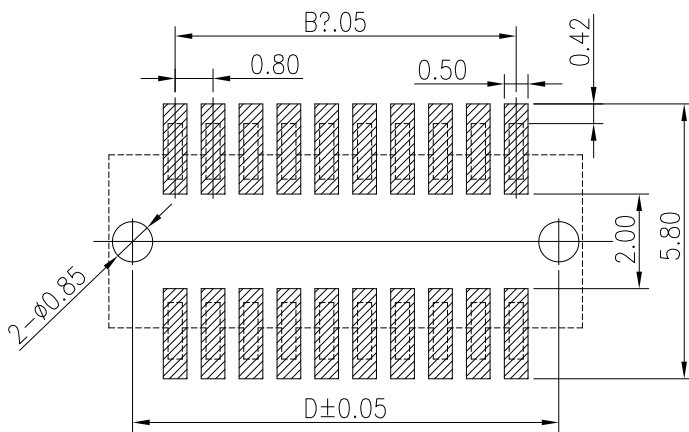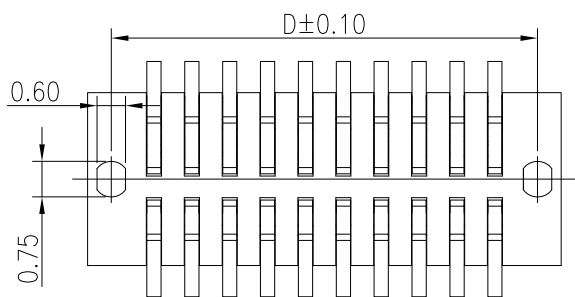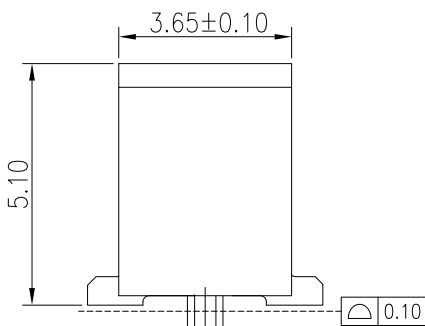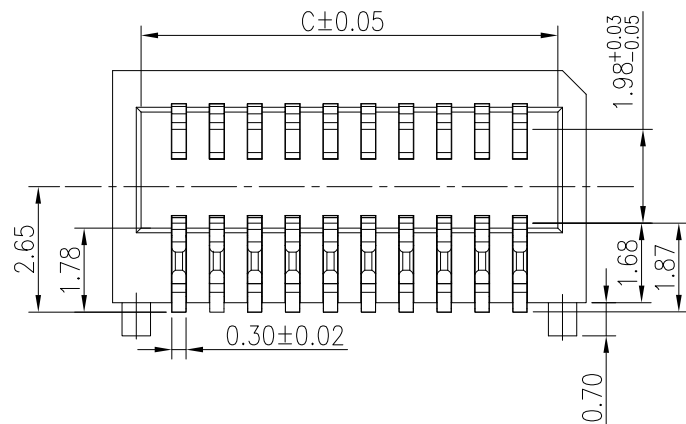

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

NO. of contacts	Dimensions			
	A.	B.	C.	D.
4	3.60	0.80	2.40	2.60
6	4.40	1.60	3.20	3.40
8	5.20	2.40	4.00	4.20
10	6.00	3.20	4.80	5.00
12	6.80	4.00	5.60	5.80
14	7.60	4.80	6.40	6.60
16	8.40	5.60	7.20	7.40
18	9.20	6.40	8.00	8.20
20	10.00	7.20	8.80	9.00
22	10.80	8.00	9.60	9.80
24	11.60	8.80	10.40	10.60
26	12.40	9.60	11.20	11.40
28	13.20	10.40	12.00	12.20
30	14.00	11.20	12.80	13.00
32	14.80	12.00	13.60	13.80
34	15.60	12.80	14.40	14.60
36	16.40	13.60	15.20	15.40
38	17.20	14.40	16.00	16.20
40	18.00	15.20	16.80	17.00
42	18.80	16.00	17.60	17.80
44	19.60	16.80	18.40	18.60
46	20.40	17.60	19.20	19.40
48	21.20	18.40	20.00	20.20
50	22.00	19.20	20.80	21.00
52	22.80	20.00	21.60	21.80

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR):	Kavin	品名(TITLE):	0.8mm 侧插BTB SOCKET
审核 (CHKD):		料号(PART NO):	LB100-GxxS-COR
核准 (APPD):		比例(SCALE)	1:8
		单位(UNITS)	mm
		张数(SHEET)	1 OF 1
		图幅(SIZE)	A4

修订 SER	新增焊锡脚位尺寸及接触GAP值	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
			Kavin	08/15/17

一般公差 GENERAL TOLERANCE	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°
版本 (REV)	B
图例	