

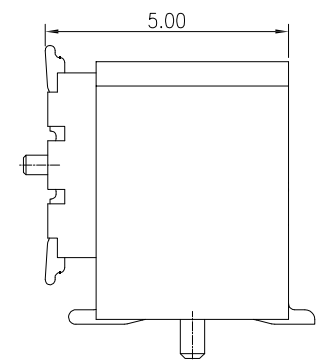


3D VIEW

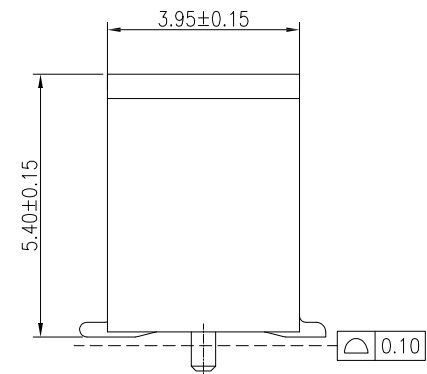

MATING HEIGHT:5.0mm

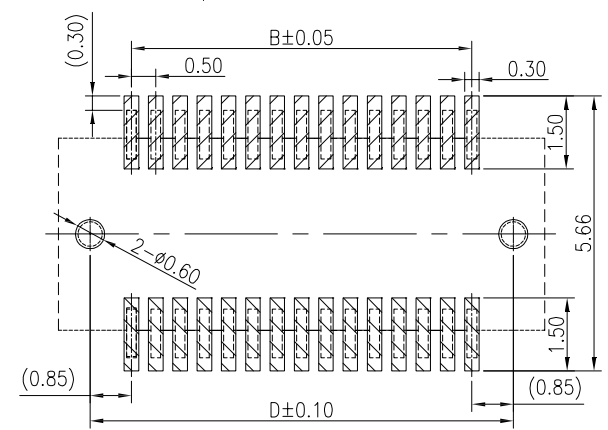

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:BRASS BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LB201-GxxS-COR

- PACKING:
R: CARRIER REEL
- STANDARD TYPE
- COLOR:BEIGE
- SOCKTE
- PIN
- PLATING: G:GOLD FLASH
- 0.5 BTB SIDE-INSERTED TYPE
- LXWCONN BTB CONNECTOR SERIES

NO.of contacts	Dimensions				NO.of contacts	Dimensions			
	A.	B.	C.	D.		A.	B.	C.	D.
4	3.50	0.50	2.52	2.20	32	10.50	7.50	9.52	9.20
6	4.00	1.00	3.02	2.70	34	11.00	8.00	10.02	9.70
8	4.50	1.50	3.52	3.20	36	11.50	8.50	10.52	10.20
10	5.00	2.00	4.02	3.70	38	12.00	9.00	11.02	10.70
12	5.50	2.50	4.52	4.20	40	12.50	9.50	11.52	11.20
14	6.00	3.00	5.02	4.70	42	13.00	10.00	12.02	11.70
16	6.50	3.50	5.52	5.20	44	13.50	10.50	12.52	12.20
18	7.00	4.00	6.02	5.70	46	14.00	11.00	13.02	12.70
20	7.50	4.50	6.52	6.20	48	14.50	11.50	13.52	13.20
22	8.00	5.00	7.02	6.70	50	15.00	12.00	14.02	13.70
24	8.50	5.50	7.52	7.20	52	15.50	12.50	14.52	14.20
26	9.00	6.00	8.02	7.70	60	17.50	14.50	16.52	16.20
28	9.50	6.50	8.52	8.20	70	20.00	17.00	19.02	18.70
30	10.00	7.00	9.02	8.70	80	22.50	19.50	21.52	21.20

 **连兴旺电子(深圳)有限公司**
connectivity **LXWCONN ELECTRONICS(SHENZHEN) CO., LTD**

RoHS
Compliant
2013/85/EC




修订 SER	修改 需 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE

一般公差
GENERAL TOLERANCE

.X ±0.25
.XX ±0.15
.XXX ±0.08
ANGLES ±1°

版本 (REV) A



制图 (DR): Kevin 2021.11.22	品名 (TITLE): 0.5mm 侧插BTB SOCKET
审核 (CHECK):	料号 (PART NO): LB201-GxxS-COR
核准 (APPD):	比例 (SCALE): 1:8 单位 (UNITS): mm 张数 (SHEET): 1 OF 1 图幅 (SIZE): A4