


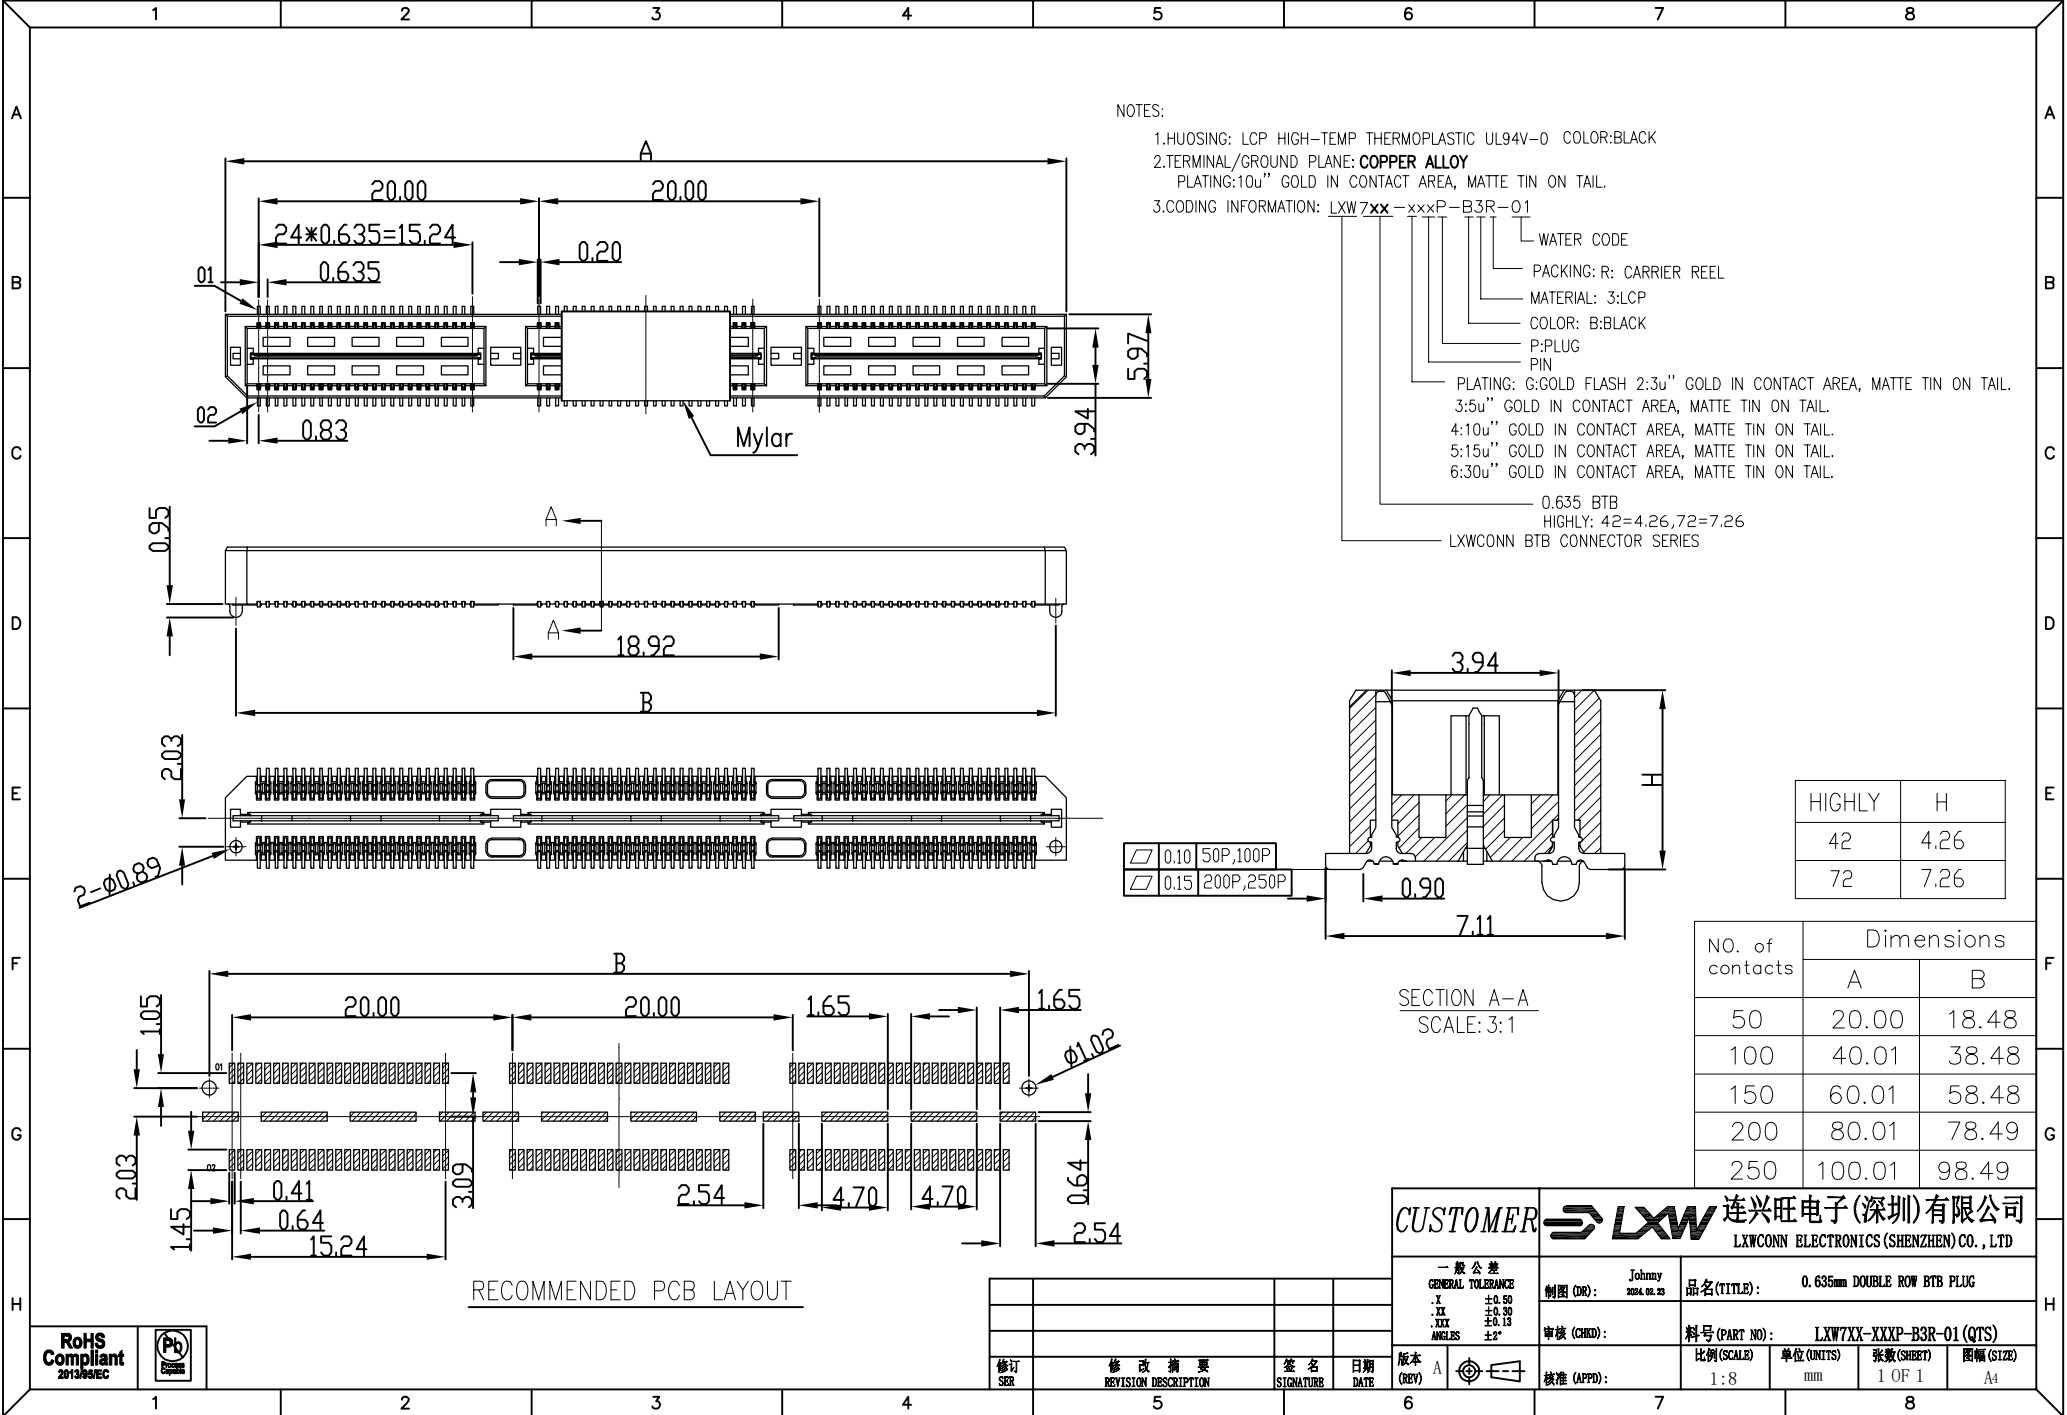

NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
 - 2.TERMINAL/GROUND PLANE: COPPER ALLOY
PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
 - 3.CODING INFORMATION: LXW7XX-XXXP-B3R-01
- WATER CODE
PACKING: R: CARRIER REEL
MATERIAL: 3:LCP
COLOR: B:BLACK
P:PLUG
PIN
PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
0.635 BTB
HIGHLY: 42=4.26,72=7.26
LXWCONN BTB CONNECTOR SERIES

SECTION A-A
SCALE: 3:1

HIGHLY	H
42	4.26
72	7.26

NO. of contacts	Dimensions	
	A	B
50	20.00	18.48
100	40.01	38.48
150	60.01	58.48
200	80.01	78.49
250	100.01	98.49


CUSTOMER		LXW 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD	
一般公差 GENERAL TOLERANCE: .X ±0.50 .XX ±0.30 .XXX ±0.13 ANGLES ±2°		制图 (DR): Johnny 2024.02.20	品名(TITLE): 0.635mm DOUBLE ROW BTB PLUG
审核 (CHKD):		料号(PART NO): LXW7XX-XXXP-B3R-01 (QTS)	
比例(SCALE): 1:8		单位(UNITS): mm	张数(SHEET): 1 OF 1 图幅(SIZE): A4
版本 (REV): A	核准 (APPD):		

RECOMMENDED PCB LAYOUT

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

RoHS
Compliant
2013/25/EC



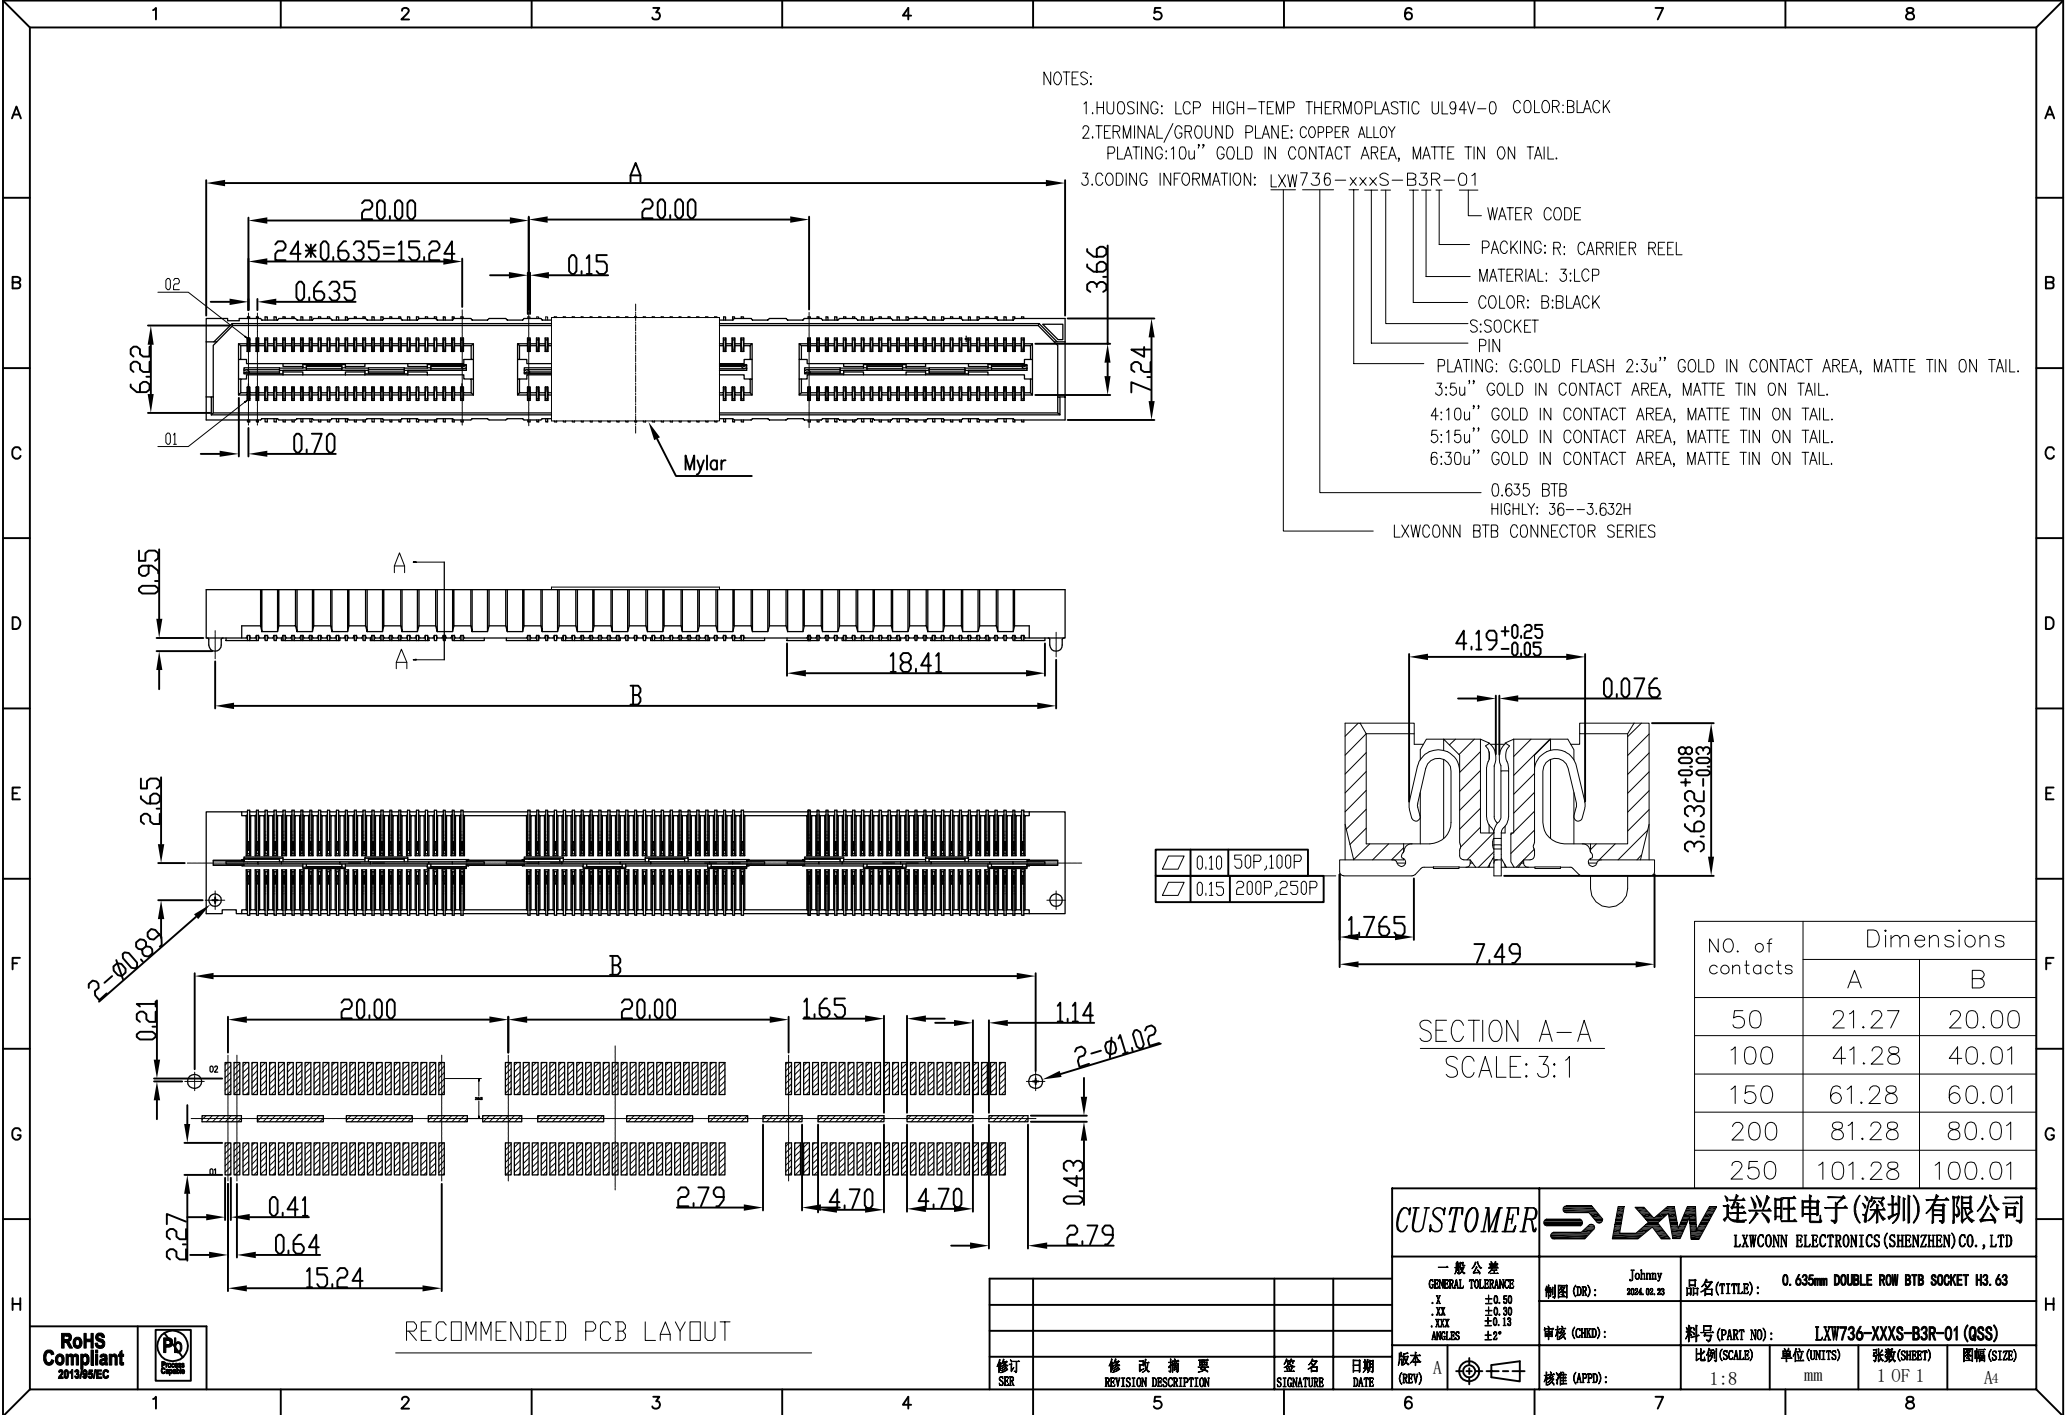

NO. of contacts	Dimensions	
	A	B
50	21.27	20.00
100	41.28	40.01
150	61.28	60.01
200	81.28	80.01
250	101.28	100.01

CUSTOMER		LXW		连兴旺电子(深圳)有限公司	
				LXWCONN ELECTRONICS (SHENZHEN) CO., LTD	
一般公差 GENERAL TOLERANCE: .X ±0.50 .XX ±0.30 .XXX ±0.13 ANGLES ±2°		制图 (DR):	Johnny 2024.02.23	品名 (TITLE):	0.635mm DOUBLE ROW BTB SOCKET H3.63
审核 (CHKD):		料号 (PART NO):		LXW736-XXXS-B3R-01 (QSS)	
版本 (REV):		比例 (SCALE):	1:8	单位 (UNITS):	mm
核准 (APPD):		张数 (SHEET):	1 OF 1	图幅 (SIZE):	A4